

# Specifications

## Duct S

- Two-position field adjustable air return, on the bottom or at the rear of the unit.
- Equipped with one Sirocco fan direct driven by a single motor.
- Long-life washable permanent filter is included.
- Auto Restart function.
- Optional condensate drain pump.



Model				AM036HNMPKH/EU	AM045HNMPKH/EU	AM056HNMPKH/EU	AM071HNMPKH/EU	
Power Supply			Φ, #, V, Hz	1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz	
Performance	Capacity (Nominal)	Cooling	kW	3.6	4.5	5.6	7.1	
		Heating	kW	4.0	5.0	6.3	8.0	
Power	Power Input (Nominal)	Cooling	W	50	60	70	120	
		Heating	W	50	60	70	120	
	Current Input (Nominal)	Cooling	A	0.5	0.6	0.7	1.0	
		Heating	A	0.5	0.6	0.7	1.0	
	Current	MCA	A	1.04	1.26	1.26	1.52	
		MFA/MOP	A	15	15	15	15	
Fan	Type		-	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	
	Number of Fans		-	2	2	2	2	
	Airflow Rate	H/M/L (UL)	m <sup>3</sup> /min		12.0/9.5/8.0	14.0/11.0/8.0	16.0/13.5/11.0	22.0/19.0/16.0
			l/s		200/158/133	233/183/133	267/225/183	367/317/267
	External Pressure	Min/Std/Max	mmAq		0.00/2.50/15.00	0.00/3.00/15.00	0.00/3.00/15.00	0.00/3.00/15.00
Pa				0.00/24.50/147.20	0.00/29.40/147.20	0.00/29.40/147.20	0.00/29.40/147.20	
Fan Motor	Model		-	BLDC motor (feedback)	BLDC motor (feedback)	BLDC motor (feedback)	BLDC motor (feedback)	
	Output x n		W	153 x 1	153 x 1	153 x 1	153 x 1	
Piping Connections	Liquid Pipe		ø, mm	6.35	6.35	6.35	9.52	
			ø, inch	1/4	1/4	1/4	3/8	
	Gas Pipe		ø, mm	12.7	12.7	12.7	15.88	
			ø, inch	1/2	1/2	1/2	5/8	
Drain Pipe		ø, mm	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)		
Wiring Connections	For power supply	Minimum	mm <sup>2</sup>	1.5	1.5	1.5	1.5	
	Connection with Indoor	Minimum	mm <sup>2</sup>	0.75	0.75	0.75	0.75	
		Remark	-		F1, F2	F1, F2	F1, F2	F1, F2
Refrigerant	Type		-	R410A(Fluorinated greenhouse gas, GWP=2,088)				
	Control Method		-	EEV Included	EEV Included	EEV Included	EEV Included	
Sound <sup>2</sup>	Sound Pressure	(H/M/L)	dB(A)	29/26/23	31/28/24	32/29/25	37/33/29	
	Sound Power	Cooling (Nominal)	dB(A)	40	44	45	47	
Dimensions	Net Weight		kg	25.5	25.5	25.5	25.5	
	Net Dimensions (W × H × D)		mm	850 x 250 x 700	850 x 250 x 700	850 x 250 x 700	850 x 250 x 700	
Air Filter	Type		-	Removable/Washable/ Mildew-proof	Removable/Washable/ Mildew-proof	Removable/Washable/ Mildew-proof	Removable/Washable/ Mildew-proof	
Additional Accessories	Drain Pump	Drain Pump	Model	MDP-G075SQ (built-in) MDP-G075SP (external)	MDP-G075SQ (built-in) MDP-G075SP (external)	MDP-G075SQ (built-in) MDP-G075SP (external)	MDP-G075SQ (built-in) MDP-G075SP (external)	
		Max. Lifting Height	mm	750	750	750	750	

### Accessories



External Drain Pump	Built-in Drain Pump	Wireless Remote Controller	Touch Controller	Wired Remote Controller	Wired Remote Controller	Wi-Fi Kit	Wireless Receiver Kit	External Room Sensor
MDP-G075SP	MDP-G075SQ	AR-EH03E (to be matched with MRK-A10N)	MWR-SH11N	MWR-WE13N	MWR-WG00*N	MIM-H04EN	MRK-A10N (to be matched with AR-EH03E)	MRW-TA




AM090HNMPKH/EU	AM112HNMPKH/EU	AM112HNHPKH/EU	AM128HNMPKH/EU	AM128HNHPKH/EU	AM140HNMPKH/EU	AM140HNHPKH/EU
1Ø, 2, 220-240 V, 50 Hz	1Ø, 2, 220-240 V, 50 Hz	1Ø, 2, 220-240 V, 50 Hz	1Ø, 2, 220-240 V, 50 Hz	1Ø, 2, 220-240 V, 50 Hz	1Ø, 2, 220-240 V, 50 Hz	1Ø, 2, 220-240 V, 50 Hz
9.0	11.2	11.2	12.8	12.8	14.0	14.0
10.0	12.5	12.5	13.8	13.8	16.0	16.0
145	165	205	175	230	215	260
145	165	205	175	230	215	260
1.2	1.4	2.05	1.5	1.4	1.7	1.5
1.2	1.4	1.2	1.5	1.4	1.7	1.5
2.03	2.51	2.92	2.51	3.17	2.51	3.42
15	15	15	15	15	15	15
Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
3	3	3	3	3	3	3
29.0/25.0/22.0	35.0/29.0/22.0	35.0/29.0/22.0	38.0/32.0/25.0	38.0/32.0/25.0	42.0/34.0/25.0	42.0/34.0/25.0
483/417/367	583/483/367	583/483/367	633/533/417	633/533/417	700/567/417	700/567/417
0.00/4.00/15.00	0.00/5.20/15.00	3.00/6.20/20.00	0.00/5.20/15.00	3.00/6.20/20.00	0.00/5.20/15.00	3.00/6.20/20.00
0.00/39.20/147.20	0.00/51.00/147.20	0.00/60.80/196.20	0.00/51.00/147.20	0.00/60.80/196.20	0.00/51.00/147.20	0.00/60.80/196.20
BLDC motor (feedback)	BLDC motor (feedback)	BLDC motor (feedback)	BLDC motor (feedback)	BLDC motor (feedback)	BLDC motor (feedback)	BLDC motor (feedback)
153 x 1	244 x 1	350 x 1	244 x 1	350 x 1	244 x 1	350 x 1
9.52	9.52	9.52	9.52	9.52	9.52	9.52
3/8	3/8	3/8	3/8	3/8	3/8	3/8
15.88	15.88	15.88	15.88	15.88	15.88	15.88
5/8	5/8	5/8	5/8	5/8	5/8	5/8
VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)	VP25 (OD 32, ID 25)
1.5	1.5	1.5	1.5	1.5	1.5	1.5
0.75	0.75	0.75	0.75	0.75	0.75	0.75
F1, F2	F1, F2	F1, F2	F1, F2	F1, F2	F1, F2	F1, F2
R410A(Fluorinated greenhouse gas, GWP=2,088)						
EEV Included	EEV Included	EEV Included	EEV Included	EEV Included	EEV Included	EEV Included
38/35/32	38/35/32	38/35/32	39/36/33	39/36/33	40/37/33	40/37/34
44	45	46	46	47	47	49
33.0	38.0	46.5	38.0	46.5	38.0	46.5
1,200 x 250 x 700	1,300 x 300 x 700	1,300 x 300 x 700	1,300 x 300 x 700	1,300 x 300 x 700	1,300 x 300 x 700	1,300 x 300 x 700
Removable/Washable/ Mildew-proof	Removable/Washable/ Mildew-proof	Removable/Washable/ Mildew-proof	Removable/Washable/ Mildew-proof	Removable/Washable/ Mildew-proof	Removable/Washable/ Mildew-proof	Removable/Washable/ Mildew-proof
MDP-G075SQ (built-in) MDP-G075SP (external)	MDP-G075SQ (built-in) MDP-G075SP (external)	MDP-G075SQ (built-in) MDP-G075SP (external)	MDP-G075SQ (built-in) MDP-G075SP (external)	MDP-G075SQ (built-in) MDP-G075SP (external)	MDP-G075SQ (built-in) MDP-G075SP (external)	MDP-G075SQ (built-in) MDP-G075SP (external)
750	750	750	750	750	750	750


# Technical Drawings

## Duct S

AM036HNMPKH/EU, AM045HNMPKH/EU, AM056HNMPKH/EU, AM071HNMPKH/EU

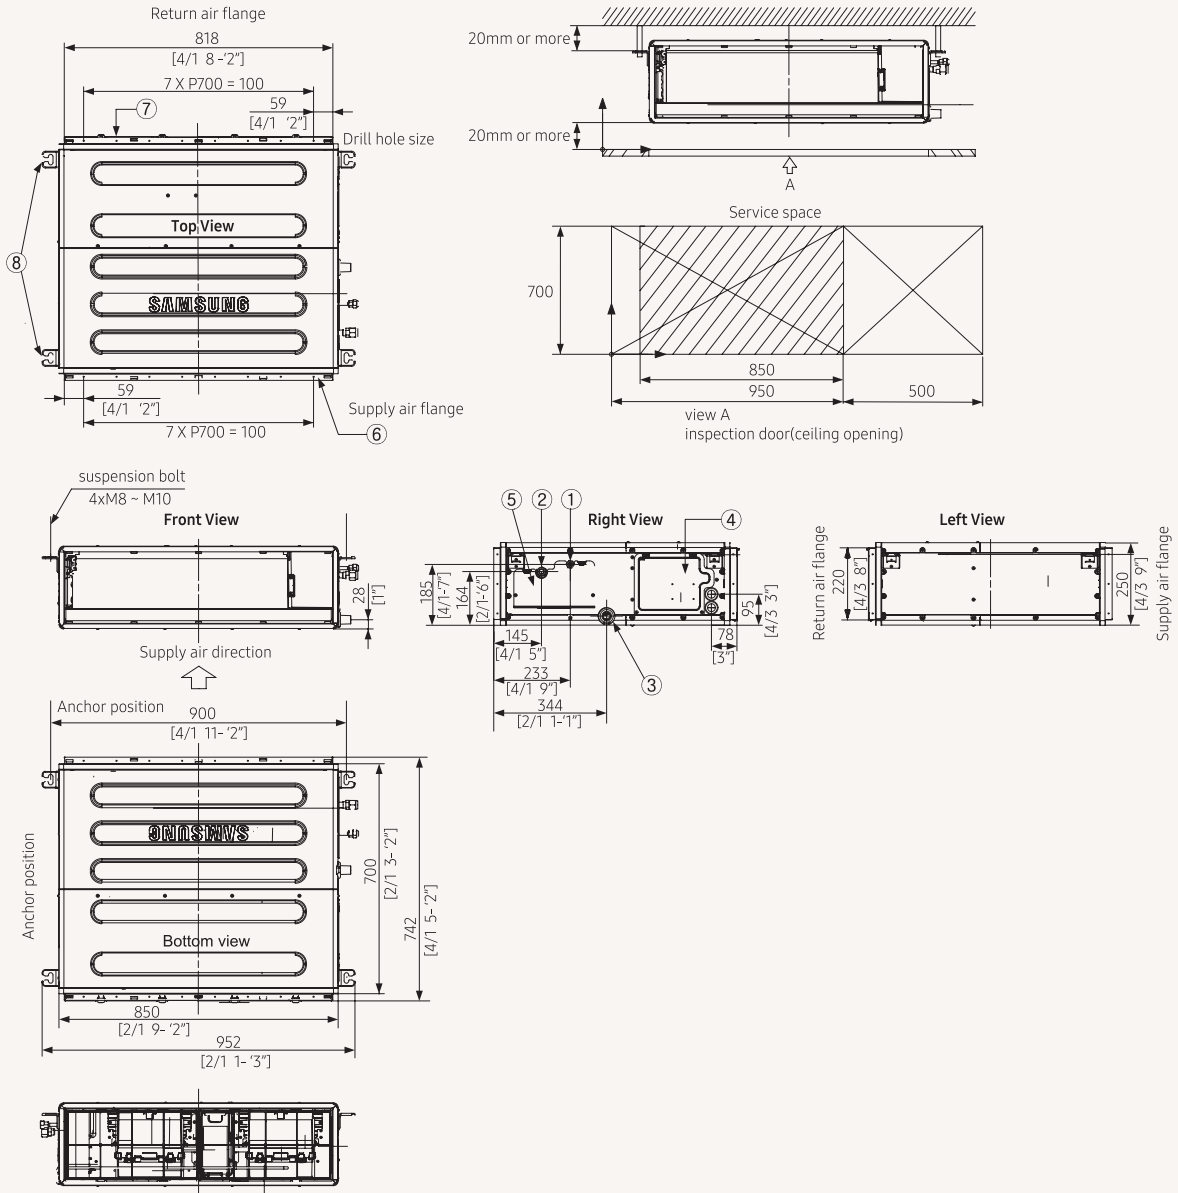

NO	Name	Description
1	Refrigerant liquid pipe	ø6.35 [1/4] Flare
2	Refrigerant gas pipe	ø12.70 [1/2] Flare
3	Condensate drain	VP25 (OD 32, ID 25)
4	Power supply/communication wiring conduits	
5	Refrigerant pipe conduits	
6	Supply air flange	
7	Return air flange	
8	Hook	







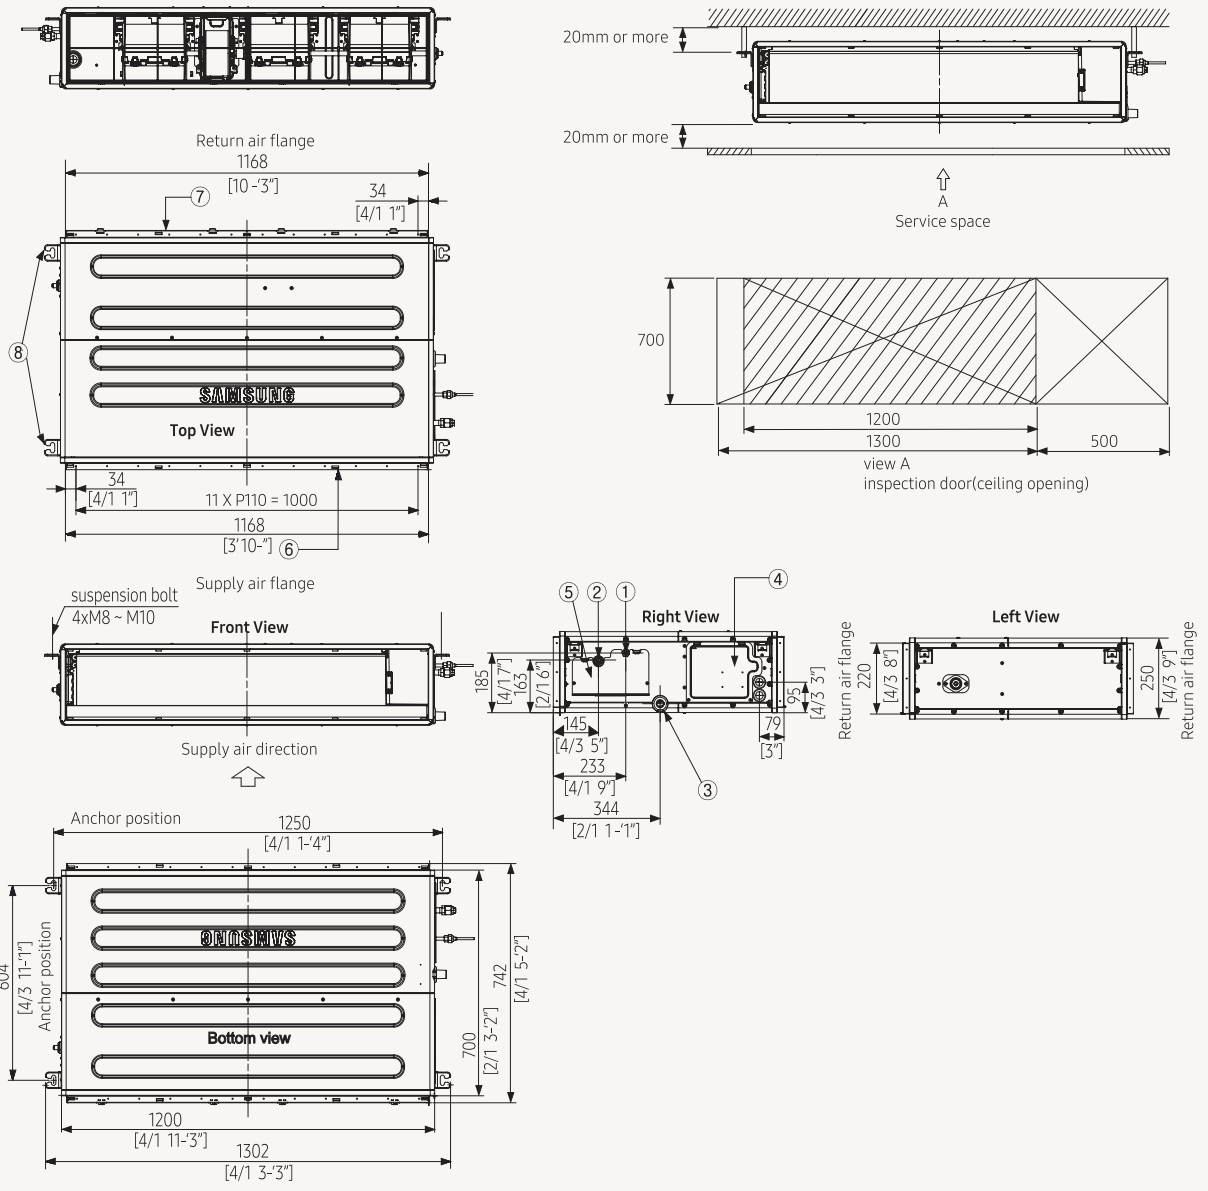


NO	Name	Description
1	Refrigerant liquid pipe	ø9.52 [3/8] Flare connection
2	Refrigerant gas pipe	ø15.88 [5/8] Flare connection
3	Condensate drain	VP25 (OD 32, ID 25)
4	Power supply/communication wiring conduits	
5	Refrigerant pipe conduits	
6	Supply air flange	
7	Return air flange	
8	Hook	

# Technical Drawings

## Duct S

AM112HNMPKH/EU, AM128HNMPKH/EU, AM140HNMPKH/EU, AM112HNHPKH/EU, AM128HNHPKH/EU, AM140HNHPKH/EU

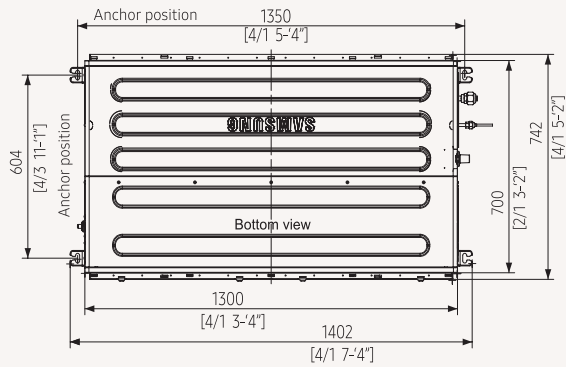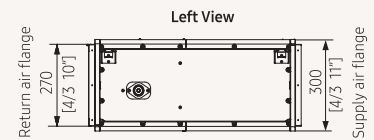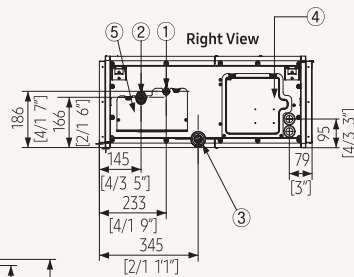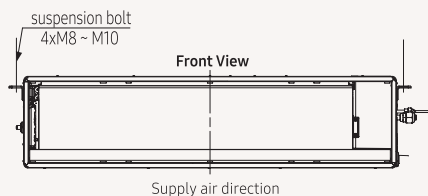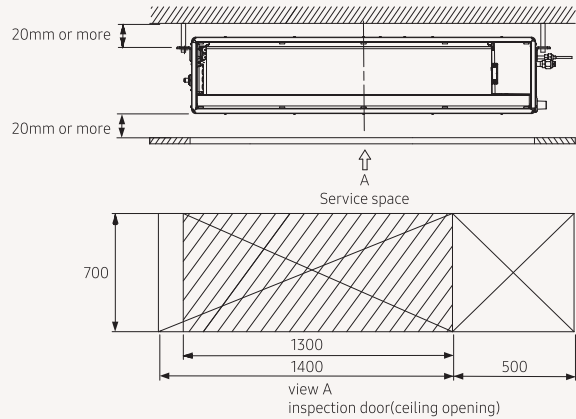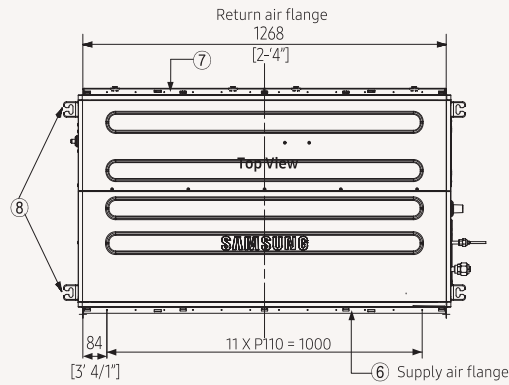

NO	Name	Description
1	Refrigerant liquid pipe	ø9.52 [3/8] Flare connection
2	Refrigerant gas pipe	ø15.88 [5/8] Flare connection
3	Condensate drain	VP25 (OD 32, ID 25)
4	Power supply/communication wiring conduits	
5	Refrigerant pipe conduits	
6	Supply air flange	
7	Return air flange	
8	Hook	

# Duct S

- 1 *Specification*
- 2 *Summary Table*
- 3 *Capacity Table*
- 4 *Dimensional Drawing*
- 5 *Center of Gravity*
- 6 *Electrical Wiring Diagram*
- 7 *Sound data*
- 8 *Fan Characteristics*
- 9 *Piping Diagram*

# 1. Specification

## Duct S

Model CODE				AM036HNMPKH/EU	AM045HNMPKH/EU	AM056HNMPKH/EU
Power Supply			Φ, #, V, Hz	1,2,220~240,50	1,2,220~240,50	1,2,220~240,50
Mode				-	HP/HR	HP/HR
Performance	Capacity (Nominal)	Cooling (ISO/SASO)	kW	3.6	4.5	5.6
			Btu/h	12,300	15,400	19,100
		Heating	kW	4.0	5.0	6.3
			Btu/h	13,600	17,100	21,500
Power	Power Input (Nominal)	Cooling	W	50	60	70
		Heating	W	50	60	70
	Current Input (Nominal)	Cooling	A	0.5	0.6	0.7
		Heating	A	0.5	0.6	0.7
	Current	MCA	A	1.04	1.26	1.26
		MFA/MOP	A	15	15	15
Heat exchanger	Type		-	FME	FME	FME
	Material	Fin	-	Al	Al	Al
		Tube	-	Al	Al	Al
	Fin Treatment		-	Anti-corrosion	Anti-corrosion	Anti-corrosion
Fan	Type		-	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Quantity		EA	2	2	2
	Air Flow Rate	H/M/L (UL)	m <sup>3</sup> /min	12.0 / 9.5 / 8.0	14.0 / 11.0 / 8.0	16.0 / 13.5 / 11.0
			l/s	200 / 158 / 133	233 / 183 / 133	267 / 225 / 183
	External Pressure	Min / Std / Max	mmAq	0 / 2.5 / 15	0 / 3 / 15	0 / 3 / 15
Pa			0 / 24.5 / 147.2	0 / 29.4 / 147.2	0 / 29.4 / 147.2	
Fan Motor	Model		-	BLDC motor(feedback)	BLDC motor(feedback)	BLDC motor(feedback)
	Output x n		W	153 x 1	153 x 1	153 x 1
Piping Connections	Liquid Pipe	Type	-	Flare connection	Flare connection	Flare connection
		Φ,mm	-	6.35	6.35	6.35
		Φ, inch	-	1/4"	1/4"	1/4"
	Gas Pipe	Type	-	Flare connection	Flare connection	Flare connection
		Φ,mm	-	12.7	12.7	12.7
		Φ, inch	-	1/2"	1/2"	1/2"
	Heat insulation		-	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes
Drain Pipe		Φ,mm	VP25 (OD 32,ID 25)	VP25 (OD 32,ID 25)	VP25 (OD 32,ID 25)	
Wiring connections	For power supply	Minimum	mm2	1.5	1.5	1.5
	For connection with indoor	Minimum	mm2	0.75	0.75	0.75
		Remark	-	F1,F2	F1,F2	F1,F2
Refrigerant	Type		-	R410A	R410A	R410A
	Control Method		-	EEV Included	EEV Included	EEV Included
Sound	Sound Pressure	High / Mid / Low	dB(A)	29/26/23	31/28/24	32/29/25
	Sound Power	Cooling (Nominal)	dB(A)	40	44	45
Dimensions	Net Weight		kg	25.5	25.5	25.5
	Shipping Weight		kg	30	30	30
	Net Dimensions (W×H×D)		mm	850 x 250 x 700	850 x 250 x 700	850 x 250 x 700
	Shipping Dimensions (W×H×D)		mm	1064 x 320 x 784	1064 x 320 x 784	1064 x 320 x 784
Air filter	Type		-	Removable / Washable / Mildew proof	Removable / Washable / Mildew proof	Removable / Washable / Mildew proof
Additional Accessories	Drain pump	Drain pump	Model	MDP-G075SQ(built-in) MDP-G075SP(external)	MDP-G075SQ(built-in) MDP-G075SP(external)	MDP-G075SQ(built-in) MDP-G075SP(external)
		Max. lifting Height	mm	750	750	750

### NOTE

- Mode : HP(Heat Pump), HR(Heat Recovery)
- Nominal Cooling : Indoor temperature 27°CDB / 19°CWB, Outdoor temperature 35°CDB/24°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Nominal Heating : Indoor temperature 20°CDB / 15°CWB, Outdoor temperature 7°CDB / 6°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Sound pressure level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
- These products contain R410A which is fluorinated greenhouse gas.
- Specifications may be subject to change without prior notice.
- Select wire size based on the value of MCA

# 1. Specification

## Duct S

Model CODE				AM071HNMPKH/EU	AM090HNMPKH/EU	AM112HNMPKH/EU
Power Supply			Φ, #, V, Hz	1,2,220-240,50	1,2,220-240,50	1,2,220-240,50
Mode			-	HP/HR	HP/HR	HP/HR
Performance	Capacity (Nominal)	Cooling (ISO/SASO)	kW	7.1	9	11.2
			Btu/h	24,200	30,700	38,200
		Heating	kW	8.0	10.0	12.5
			Btu/h	27,300	34,100	42,700
Power	Power Input (Nominal)	Cooling	W	120	145	165
		Heating		120	145	165
	Current Input (Nominal)	Cooling	A	1.0	1.2	1.4
		Heating		1.0	1.2	1.4
	Current	MCA	A	1.52	2.03	2.51
		MFA/MOP		15	15	15
Heat exchanger	Type		-	FME	FME	FME
	Material	Fin	-	Al	Al	Al
		Tube	-	Al	Al	Al
	Fin Treatment		-	Anti-corrosion	Anti-corrosion	Anti-corrosion
Fan	Type		-	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Quantity		EA	2	3	3
	Air Flow Rate	H/M/L (UL)	m <sup>3</sup> /min	22.0 / 19.0 / 16.0	29.0 / 25.0 / 22.0	35.0 / 29.0 / 22.0
			l/s	367 / 317 / 267	483 / 417 / 367	583 / 483 / 367
	External Pressure	Min / Std / Max	mmAq	0 / 3 / 15	0 / 4 / 15	0 / 5.2 / 15
			Pa	0 / 29.4 / 147.2	0 / 39.2 / 147.2	0 / 51.0 / 147.2
Fan Motor	Model		-	BLDC motor(feedback)	BLDC motor(feedback)	BLDC motor(feedback)
	Output x n		W	153 x 1	153 x 1	244 x 1
Piping Connections	Liquid Pipe		Type	Flare connection	Flare connection	Flare connection
			Φ,mm	9.52	9.52	9.52
			Φ, inch	3/8"	3/8"	3/8"
	Gas Pipe		Type	Flare connection	Flare connection	Flare connection
			Φ,mm	15.88	15.88	15.88
			Φ, inch	5/8"	5/8"	5/8"
	Heat insulation		-	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes
Drain Pipe		Φ,mm	VP25 (OD 32,ID 25)	VP25 (OD 32,ID 25)	VP25 (OD 32,ID 25)	
Wiring connections	For power supply	Minimum	mm <sup>2</sup>	1.5	1.5	1.5
	For connection with indoor	Minimum	mm <sup>2</sup>	0.75	0.75	0.75
		Remark	-		F1,F2	F1,F2
Refrigerant	Type		-	R410A	R410A	R410A
	Control Method		-	EEV Included	EEV Included	EEV Included
Sound	Sound Pressure	High / Mid / Low	dB(A)	37/33/29	38/35/32	38/35/32
	Sound Power	Cooling (Nominal)		47	44	45
Dimensions	Net Weight		kg	25.5	33	38
	Shipping Weight		kg	30	38.5	43.5
	Net Dimensions (W×H×D)		mm	850 x 250 x 700	1200 x 250 x 700	1300 x 300 x 700
	Shipping Dimensions (W×H×D)		mm	1064 x 320 x 784	1429 x 320 x 779	1529 x 370 x 779
Air filter	Type		-	Removable / Washable / Mildew proof	Removable / Washable / Mildew proof	Removable / Washable / Mildew proof
Additional Accessories	Drain pump	Drain pump	Model	MDP-G075SQ(built-in) MDP-G075SP(external)	MDP-G075SQ(built-in) MDP-G075SP(external)	MDP-G075SQ(built-in) MDP-G075SP(external)
		Max. lifting Height	mm	750	750	750

### NOTE

- Mode : HP(Heat Pump), HR(Heat Recovery)
- Nominal Cooling : Indoor temperature 27°CDB / 19°CWB, Outdoor temperature 35°CDB/24°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Nominal Heating : Indoor temperature 20°CDB / 15°CWB, Outdoor temperature 7°CDB / 6°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Sound pressure level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
- These products contain R410A which is fluorinated greenhouse gas.
- Specifications may be subject to change without prior notice.
- Select wire size based on the value of MCA



# 1. Specification

## Duct S

Model CODE				AM128HNMPKH/EU	AM140HNMPKH/EU	AM112HNHPKH/EU
Power Supply			Φ, #, V, Hz	1,2,220~240,50	1,2,220~240,50	1,2,220~240,50
Mode			-	HP/HR	HP/HR	HP/HR
Performance	Capacity (Nominal)	Cooling (ISO/SASO)	kW	12.8	14	11.2
			Btu/h	43,700	47,800	38,200
		Heating	kW	13.8	16.0	12.5
			Btu/h	47,100	54,600	42,700
Power	Power Input (Nominal)	Cooling	W	175	215	205
		Heating	W	175	215	205
	Current Input (Nominal)	Cooling	A	1.5	1.7	205.0
		Heating	A	1.5	1.7	1.2
	Current	MCA	A	2.51	2.51	2.92
		MFA/MOP	A	15	15	15
Heat exchanger	Type		-	FME	FME	FME
	Material	Fin	-	Al	Al	Al
		Tube	-	Al	Al	Al
	Fin Treatment		-	Anti-corrosion	Anti-corrosion	Anti-corrosion
Fan	Type		-	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Quantity		EA	3	3	3
	Air Flow Rate	H/M/L (UL)	m <sup>3</sup> /min	38.0 / 32.0 / 25.0	42.0 / 34.0 / 25.0	35.0 / 29.0 / 22.0
			l/s	633 / 533 / 417	700 / 567 / 417	583 / 483 / 367
	External Pressure	Min / Std / Max	mmAq	0 / 5.2 / 15	0 / 5.2 / 15	3 / 6.2 / 20
Pa			0 / 51.0 / 147.2	0 / 51.0 / 147.2	0 / 60.8 / 196.2	
Fan Motor	Model		-	BLDC motor(feedback)	BLDC motor(feedback)	BLDC motor(feedback)
	Output x n		W	244 x 1	244 x 1	350 x 1
Piping Connections	Liquid Pipe	Type	-	Flare connection	Flare connection	Flare connection
		Φ,mm	-	9.52	9.52	9.52
		Φ, inch	-	3/8"	3/8"	3/8"
	Gas Pipe	Type	-	Flare connection	Flare connection	Flare connection
		Φ,mm	-	15.88	15.88	15.88
		Φ, inch	-	5/8"	5/8"	5/8"
	Heat insulation		-	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes
Drain Pipe		Φ,mm	VP25 (OD 32,ID 25)	VP25 (OD 32,ID 25)	VP25 (OD 32,ID 25)	
Wiring connections	For power supply	Minimum	mm2	1.5	1.5	1.5
	For connection with indoor	Minimum	mm2	0.75	0.75	0.75
		Remark	-	-	F1,F2	F1,F2
Refrigerant	Type		-	R410A	R410A	R410A
	Control Method		-	EEV Included	EEV Included	EEV Included
Sound	Sound Pressure	High / Mid / Low	dB(A)	39/36/33	40/37/33	38/35/32
	Sound Power	Cooling (Nominal)	dB(A)	46	47	46
Dimensions	Net Weight		kg	38	38	46.5
	Shipping Weight		kg	43.5	43.5	52.5
	Net Dimensions (W×H×D)		mm	1300 x 300 x 700	1300 x 300 x 700	1300 x 300 x 700
	Shipping Dimensions (W×H×D)		mm	1529 x 370 x 779	1529 x 370 x 779	1529 x 370 x 779
Air filter	Type		-	Removable / Washable / Mildew proof	Removable / Washable / Mildew proof	Removable / Washable / Mildew proof
Additional Accessories	Drain pump	Drain pump	Model	MDP-G075SQ(built-in) MDP-G075SP(external)	MDP-G075SQ(built-in) MDP-G075SP(external)	MDP-G075SQ(built-in) MDP-G075SP(external)
		Max. lifting Height	mm	750	750	750

### NOTE

- Mode : HP(Heat Pump), HR(Heat Recovery)
- Nominal Cooling : Indoor temperature 27°CDB / 19°CWB, Outdoor temperature 35°CDB/24°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Nominal Heating : Indoor temperature 20°CDB / 15°CWB, Outdoor temperature 7°CDB / 6°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Sound pressure level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
- These products contain R410A which is fluorinated greenhouse gas.
- Specifications may be subject to change without prior notice.
- Select wire size based on the value of MCA

# 1. Specification

## Duct S

Model CODE				AM128HNHPKH/EU	AM140HNHPKH/EU
Power Supply			Φ, #, V, Hz	1,2,220-240,50	1,2,220-240,50
Mode			-	HP/HR	HP/HR
Performance	Capacity (Nominal)	Cooling (ISO/SASO)	kW	12.8	14
			Btu/h	43,700	47,800
		Heating	kW	13.8	16.0
			Btu/h	47,100	54,600
Power	Power Input (Nominal)	Cooling	W	230	260
		Heating	W	230	260
	Current Input (Nominal)	Cooling	A	1.4	1.5
		Heating	A	1.4	1.5
	Current	MCA	A	3.17	3.42
		MFA/MOP	A	15	15
Heat exchanger	Type		-	FME	FME
	Material	Fin	-	Al	Al
		Tube	-	Al	Al
	Fin Treatment		-	Anti-corrosion	Anti-corrosion
Fan	Type		-	Sirocco Fan	Sirocco Fan
	Quantity		EA	3	3
	Air Flow Rate	H/M/L (UL)	m <sup>3</sup> /min	38.0 / 32.0 / 25.0	42.0 / 34.0 / 25.0
			l/s	633 / 533 / 417	700 / 567 / 417
	External Pressure	Min / Std / Max	mmAq	3 / 6.2 / 20	3 / 6.2 / 20
			Pa	0 / 60.8 / 196.2	0 / 60.8 / 196.2
Fan Motor	Model		-	BLDC motor(feedback)	BLDC motor(feedback)
	Output x n		W	350 x 1	350 x 1
Piping Connections	Liquid Pipe		Type	Flare connection	Flare connection
			Φ,mm	9.52	9.52
			Φ, inch	3/8"	3/8"
	Gas Pipe		Type	Flare connection	Flare connection
			Φ,mm	15.88	15.88
			Φ, inch	5/8"	5/8"
	Heat insulation		-	Both liquid and gas pipes	Both liquid and gas pipes
Drain Pipe		Φ,mm	VP25 (OD 32,ID 25)	VP25 (OD 32,ID 25)	
Wiring connections	For power supply	Minimum	mm <sup>2</sup>	1.5	1.5
	For connection with indoor	Minimum	mm <sup>2</sup>	0.75	0.75
		Remark	-	-	F1,F2
Refrigerant	Type		-	R410A	R410A
	Control Method		-	EEV Included	EEV Included
Sound	Sound Pressure	High / Mid / Low	dB(A)	39/36/33	40/37/34
	Sound Power	Cooling (Nominal)		47	49
Dimensions	Net Weight		kg	46.5	46.5
	Shipping Weight		kg	52.5	52.5
	Net Dimensions (W×H×D)		mm	1300 x 300 x 700	1300 x 300 x 700
	Shipping Dimensions (W×H×D)		mm	1529 x 370 x 779	1529 x 370 x 779
Air filter	Type		-	Removable / Washable / Mildew proof	Removable / Washable / Mildew proof
Additional Accessories	Drain pump	Drain pump	Model	MDP-G075SQ(built-in) MDP-G075SP(external)	MDP-G075SQ(built-in) MDP-G075SP(external)
		Max. lifting Height	mm	750	750

### NOTE

- Mode : HP(Heat Pump), HR(Heat Recovery)
- Nominal Cooling : Indoor temperature 27°CDB / 19°CWB, Outdoor temperature 35°CDB/24°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Nominal Heating : Indoor temperature 20°CDB / 15°CWB, Outdoor temperature 7°CDB / 6°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Sound pressure level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
- These products contain R410A which is fluorinated greenhouse gas.
- Specifications may be subject to change without prior notice.
- Select wire size based on the value of MCA

## 2. Summary Table

### Performance Characteristics

Model Code	Fan Speed	Nominal Capacity			Airflow (CMM)	Sound Pressure (dBA)	Sound Power (dBA)	Static Pressure (Min/Std/Max) (Pa)
		Cooling (kW)	Sensible (Kw)	Heating (kW)				
AM036HNMPKH/EU	High	3.6	2.6	4.0	12.0	29	40	0 / 2.5 / 15
	Mid	2.5	2.3	3.6	9.5	26	-	
	Low	2.1	1.9	3.3	8.0	23	-	
AM045HNMPKH/EU	High	4.5	3.3	5.0	14.0	31	44	0 / 3 / 15
	Mid	3.0	2.8	4.4	11.0	28	-	
	Low	2.5	2.3	3.8	8.0	24	-	
AM056HNMPKH/EU	High	5.6	4.2	6.3	16.0	32	45	0 / 3 / 15
	Mid	3.8	3.3	5.8	13.5	29	-	
	Low	3.2	2.9	5.2	11.0	25	-	
AM071HNMPKH/EU	High	7.1	5.4	8.0	22.0	37	47	0 / 3 / 15
	Mid	4.9	4.3	7.4	19.0	33	-	
	Low	4.0	3.7	6.8	16.0	29	-	
AM090HNMPKH/EU	High	9.0	7.1	10.0	29.0	38	44	0 / 4 / 15
	Mid	6.1	5.4	9.3	25.0	35	-	
	Low	5.0	4.6	8.7	22.0	32	-	
AM112HNMPKH/EU	High	11.2	8.6	12.5	35.0	38	45	0 / 5.2 / 15
	Mid	7.4	6.5	11.4	29.0	35	-	
	Low	6.0	5.5	9.9	22.0	32	-	
AM128HNMPKH/EU	High	12.8	9.9	13.8	38.0	39	46	0 / 5.2 / 15
	Mid	8.5	7.5	12.7	32.0	36	-	
	Low	6.8	6.3	11.2	25.0	33	-	
AM140HNMPKH/EU	High	14.0	10.8	16.0	42.0	40	47	0 / 5.2 / 15
	Mid	9.1	7.9	14.4	34.0	37	-	
	Low	7.3	6.7	12.3	25.0	33	-	
AM112HNHPKH/EU	High	11.2	8.6	12.5	35.0	38	46	0 / 6.2 / 20
	Mid	7.4	6.5	11.4	29.0	35	-	
	Low	6.0	5.5	9.9	22.0	32	-	
AM128HNHPKH/EU	High	12.8	9.9	13.8	38.0	39	47	0 / 6.2 / 20
	Mid	8.5	7.5	12.7	32.0	36	-	
	Low	6.8	6.3	11.2	25.0	33	-	
AM140HNHPKH/EU	High	14.0	10.8	16.0	42.0	40	49	0 / 6.2 / 20
	Mid	9.1	7.9	14.4	34.0	37	-	
	Low	7.3	6.7	12.3	25.0	34	-	

### Electrical Characteristics

Model Code	Power Supply (Ø, #, V, Hz)	Power Input (W)	Current Input (A)	MCA (A)	MFA (A)	FLA (A)
AM036HNMPKH/EU	1, 2, 220-240, 50	50.0	0.50	1.04	15	0.83
AM045HNMPKH/EU	1, 2, 220-240, 50	60.0	0.60	1.26	15	1.01
AM056HNMPKH/EU	1, 2, 220-240, 50	70.0	0.70	1.26	15	1.01
AM071HNMPKH/EU	1, 2, 220-240, 50	120.0	1.00	1.52	15	1.21
AM090HNMPKH/EU	1, 2, 220-240, 50	145.0	1.20	2.03	15	1.63
AM112HNMPKH/EU	1, 2, 220-240, 50	165.0	1.40	2.51	15	2.01
AM128HNMPKH/EU	1, 2, 220-240, 50	175.0	1.50	2.51	15	2.01
AM140HNMPKH/EU	1, 2, 220-240, 50	215.0	1.70	2.51	15	2.01
AM112HNHPKH/EU	1, 2, 220-240, 50	205.0	1.20	2.92	15	2.34
AM128HNHPKH/EU	1, 2, 220-240, 50	230.0	1.40	3.17	15	2.54
AM140HNHPKH/EU	1, 2, 220-240, 50	260.0	1.50	3.42	15	2.73

#### NOTE

- MCA : Minimum circuit amperes
- FLA : Full load amperes.

# 3. Capacity Table

Duct S (AM\*\*\*HNMPKH/EU)

Cooling

TC: Total Capacity, SHC: Sensible Heat Capacity

Capacity Index	Outdoor Air Temp. (°C, DB)	Indoor temperature													
		20(°C, DB)		23(°C, DB)		26(°C, DB)		27(°C, DB)		28(°C, DB)		30(°C, DB)		32(°C, DB)	
		14(°C, WB)		16(°C, WB)		18(°C, WB)		19(°C, WB)		20(°C, WB)		22(°C, WB)		24(°C, WB)	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
036	10	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.3	2.5
	12	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.3	2.5
	14	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.3	2.5
	16	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.3	2.5
	18	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.2	2.4
	20	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.2	2.4
	21	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.2	2.4
	23	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.2	2.4
	25	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.2	2.4
	27	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.2	2.4
	29	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.2	2.4
	31	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.2	2.4
	33	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.2	2.4
	35	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	4.0	2.6	4.2	2.4
	37	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	3.9	2.5	4.2	2.4
39	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	3.9	2.5	4.1	2.3	
42	2.5	2.0	2.9	2.3	3.4	2.5	3.6	2.6	3.7	2.6	3.8	2.5	4.0	2.2	
44	2.5	2.0	2.9	2.3	3.3	2.4	3.4	2.5	3.6	2.5	3.7	2.4	3.9	2.2	
46	2.5	2.0	2.9	2.3	3.2	2.4	3.3	2.4	3.4	2.4	3.6	2.3	3.8	2.1	
48	2.5	2.0	2.8	2.2	3.2	2.3	3.2	2.3	3.4	2.4	3.5	2.2	3.6	2.0	
045	10	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.4	3.4
	12	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.4	3.4
	14	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.4	3.4
	16	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.3	3.1
	18	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.3	3.1
	20	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.3	3.1
	21	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.3	3.1
	23	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.3	3.1
	25	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.3	3.1
	27	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.3	3.1
	29	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.3	3.1
	31	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.3	3.1
	33	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.3	3.1
	35	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.7	3.3	5.0	3.3	5.3	3.1
	37	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.6	3.2	4.9	3.2	5.2	3.1
39	3.1	2.7	3.7	3.1	4.2	3.2	4.5	3.3	4.6	3.2	4.9	3.2	5.1	3.0	
42	3.1	2.7	3.7	3.1	4.2	3.2	4.4	3.3	4.5	3.2	4.8	3.1	5.0	2.9	
44	3.1	2.7	3.7	3.1	4.1	3.1	4.3	3.2	4.4	3.1	4.6	3.0	4.8	2.8	
46	3.1	2.7	3.7	3.1	4.0	3.0	4.2	3.1	4.3	3.0	4.5	2.9	4.7	2.7	
48	3.1	2.6	3.6	3.0	3.9	3.0	4.0	3.0	4.2	2.9	4.3	2.8	4.5	2.6	
056	10	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.3	4.3	6.7	4.1
	12	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.3	4.3	6.7	4.1
	14	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.7	4.1
	16	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.6	4.0
	18	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.6	4.0
	20	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.6	4.0
	21	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.6	4.0
	23	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.6	4.0
	25	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.6	4.0
	27	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.6	4.0
	29	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.6	4.0
	31	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.6	4.0
	33	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.6	4.0
	35	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.2	4.2	6.6	4.0
	37	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.1	4.1	6.5	3.9
39	3.9	3.3	4.6	3.8	5.3	4.0	5.6	4.2	5.8	4.2	6.1	4.1	6.4	3.8	
42	3.9	3.3	4.6	3.8	5.3	4.0	5.5	4.1	5.7	4.2	6.0	4.0	6.2	3.7	
44	3.9	3.3	4.6	3.8	5.1	3.9	5.3	4.0	5.6	4.0	5.8	3.9	6.0	3.6	
46	3.9	3.3	4.6	3.7	5.0	3.8	5.2	3.9	5.4	3.9	5.6	3.7	5.9	3.5	
48	3.9	3.2	4.5	3.7	5.0	3.7	5.0	3.8	5.3	3.8	5.4	3.6	5.7	3.3	

# 3. Capacity Table

Duct S (AM\*\*\*HNMPKH/EU)

Cooling

TC: Total Capacity, SHC: Sensible Heat Capacity

Capacity Index	Outdoor Air Temp. (°C, DB)	Indoor temperature													
		20(°C, DB)		23(°C, DB)		26(°C, DB)		27(°C, DB)		28(°C, DB)		30(°C, DB)		32(°C, DB)	
		14(°C, WB)		16(°C, WB)		18(°C, WB)		19(°C, WB)		20(°C, WB)		22(°C, WB)		24(°C, WB)	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
071	10	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	8.0	5.7	8.5	5.4
	12	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.5	5.4
	14	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.5	5.4
	16	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.4	5.3
	18	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.4	5.3
	20	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.4	5.3
	21	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.4	5.3
	23	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.4	5.3
	25	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.4	5.3
	27	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.4	5.3
	29	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.4	5.3
	31	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.4	5.3
	33	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.4	5.3
	35	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.4	5.6	7.9	5.6	8.4	5.3
	37	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.3	5.5	7.8	5.5	8.2	5.2
39	4.9	4.3	5.8	5.0	6.7	5.2	7.1	5.4	7.3	5.5	7.7	5.4	8.1	5.1	
42	4.9	4.3	5.8	5.0	6.7	5.2	7.0	5.3	7.2	5.4	7.6	5.3	7.9	5.0	
44	4.9	4.3	5.8	5.0	6.5	5.0	6.8	5.2	7.0	5.3	7.3	5.1	7.6	4.8	
46	4.9	4.3	5.7	5.0	6.4	4.9	6.6	5.0	6.8	5.1	7.0	4.9	7.4	4.7	
48	4.8	4.2	5.7	4.9	6.3	4.9	6.4	4.9	6.7	5.0	6.8	4.8	7.2	4.5	
090	10	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.4	7.3	10.1	7.3	10.8	7.3
	12	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.4	7.3	10.1	7.3	10.8	7.3
	14	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.7	7.1
	16	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.7	7.1
	18	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.6	7.0
	20	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.6	7.0
	21	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.6	7.0
	23	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.6	7.0
	25	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.6	7.0
	27	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.6	7.0
	29	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.6	7.0
	31	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.6	7.0
	33	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.6	7.0
	35	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	10.0	7.2	10.6	7.0
	37	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.3	7.2	9.9	7.1	10.4	6.9
39	6.2	5.7	7.3	6.5	8.4	6.9	9.0	7.1	9.2	7.1	9.7	7.0	10.2	6.8	
42	6.2	5.7	7.3	6.5	8.3	6.8	8.9	7.0	9.1	7.0	9.5	6.9	9.9	6.6	
44	6.2	5.7	7.3	6.5	8.1	6.7	8.6	6.8	8.8	6.8	9.2	6.6	9.6	6.4	
46	6.2	5.7	7.2	6.4	8.0	6.6	8.3	6.6	8.6	6.6	8.9	6.4	9.3	6.2	
48	6.1	5.6	7.1	6.3	7.8	6.4	8.1	6.4	8.4	6.5	8.6	6.2	9.0	6.0	
112	10	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.5	8.9	13.4	8.6
	12	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.5	8.9	13.4	8.6
	14	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.5	8.9	13.4	8.6
	16	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.5	8.9	13.3	8.5
	18	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.5	8.9	13.3	8.5
	20	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	21	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	23	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	25	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	27	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	29	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	31	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	33	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	35	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.7	13.2	8.5
	37	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.9	13.2	8.5
39	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.3	8.8	13.0	8.4	
42	7.7	6.8	9.1	7.7	10.4	8.1	11.1	8.5	11.5	8.7	12.1	8.6	12.7	8.2	
44	7.7	6.8	9.1	7.7	10.1	7.9	10.7	8.2	11.1	8.4	11.6	8.3	12.2	7.9	
46	7.7	6.8	9.0	7.6	10.0	7.8	10.4	8.0	10.8	8.2	11.2	8.0	11.9	7.7	
48	7.6	6.7	8.9	7.5	9.8	7.7	10.1	7.7	10.6	8.0	10.9	7.8	11.5	7.4	

# 3. Capacity Table

Duct S (AM\*\*\*HNMPKH/EU)

Cooling

TC: Total Capacity, SHC: Sensible Heat Capacity

Capacity Index	Outdoor Air Temp. (°C, DB)	Indoor temperature													
		20(°C, DB)		23(°C, DB)		26(°C, DB)		27(°C, DB)		28(°C, DB)		30(°C, DB)		32(°C, DB)	
		14(°C, WB)		16(°C, WB)		18(°C, WB)		19(°C, WB)		20(°C, WB)		22(°C, WB)		24(°C, WB)	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
128	10	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.3	10.0	15.4	9.9
	12	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.3	10.0	15.3	9.8
	14	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.3	10.0	15.3	9.8
	16	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.2	9.8
	18	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	20	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	21	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	23	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	25	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	27	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	29	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	31	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	33	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	35	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	37	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.2	9.9	14.0	9.8	14.9	9.6
	39	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.1	9.8	13.8	9.6	14.5	9.4
42	8.8	7.8	10.4	8.9	11.9	9.4	12.6	9.8	12.9	9.7	13.6	9.4	14.1	9.2	
44	8.8	7.8	10.4	8.9	11.6	9.2	12.2	9.5	12.6	9.4	13.0	9.1	13.6	8.8	
46	8.8	7.8	10.3	8.8	11.4	9.0	11.8	9.2	12.2	9.1	12.6	8.8	13.3	8.6	
48	8.7	7.7	10.2	8.7	11.2	8.9	11.5	8.9	12.0	8.9	12.2	8.5	12.8	8.3	
140	10	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.6	10.9	15.7	11.0	16.8	10.9
	12	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.6	10.9	16.7	10.8
	14	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.6	10.9	16.7	10.8
	16	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.6	10.9	16.6	10.7
	18	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.6	10.7
	20	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	21	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	23	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	25	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	27	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	29	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	31	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	33	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	35	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	37	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.4	10.7	16.3	10.5
	39	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.4	10.7	15.1	10.5	15.9	10.3
42	9.7	8.6	11.4	9.7	13.0	10.4	13.8	10.7	14.2	10.6	14.8	10.3	15.5	10.0	
44	9.7	8.6	11.4	9.7	12.7	10.1	13.4	10.3	13.8	10.3	14.2	9.9	15.0	9.7	
46	9.7	8.6	11.3	9.6	12.4	10.0	12.9	10.0	13.4	10.0	13.8	9.6	14.6	9.4	
48	9.6	8.5	11.1	9.5	12.2	9.8	12.6	9.7	13.1	9.8	13.4	9.3	14.1	9.1	

# 3. Capacity Table

Duct S (AM\*\*\*HNMPKH/EU)

Heating

TC: Total Capacity

Capacity Index	Outdoor Air Temp. (°C )		Indoor temperature ( °C,DB )				
			16(°C,DB)	18(°C,DB)	20(°C,DB)	22(°C,DB)	24(°C,DB)
	DB	WB	TC kW	TC kW	TC kW	TC kW	TC kW
036	-19.8	-20.0	2.4	2.4	2.3	2.3	2.3
	-18.8	-19.0	2.5	2.4	2.3	2.3	2.3
	-16.7	-17.0	2.6	2.5	2.4	2.4	2.3
	-14.7	-15.0	2.7	2.6	2.5	2.5	2.4
	-12.6	-13.0	2.8	2.7	2.7	2.6	2.6
	-10.5	-11.0	2.9	2.9	2.9	2.8	2.8
	-9.5	-10.0	2.9	2.9	2.9	2.8	2.8
	-8.5	-9.1	3.0	3.0	3.0	2.9	2.9
	-7.0	-7.6	3.1	3.1	3.0	3.0	2.9
	-5.0	-5.6	3.3	3.2	3.2	3.1	3.0
	-3.0	-3.7	3.4	3.4	3.3	3.2	3.1
	0.0	-0.7	3.6	3.6	3.5	3.4	3.2
	3.0	2.2	3.8	3.7	3.7	3.5	3.4
	5.0	4.1	3.9	3.9	3.8	3.6	3.4
	7.0	6.0	4.1	4.1	4.0	3.7	3.4
9.0	7.9	4.2	4.1	4.0	3.7	3.4	
11.0	9.8	4.4	4.2	4.0	3.7	3.4	
13.0	11.8	4.5	4.2	4.0	3.7	3.4	
15.0	13.7	4.6	4.3	4.0	3.7	3.4	
045	-19.8	-20.0	3.1	3.1	2.9	2.9	2.9
	-18.8	-19.0	3.1	3.1	3.0	2.9	2.9
	-16.7	-17.0	3.2	3.2	3.1	3.0	3.0
	-14.7	-15.0	3.3	3.3	3.2	3.1	3.0
	-12.6	-13.0	3.5	3.4	3.4	3.3	3.2
	-10.5	-11.0	3.7	3.6	3.6	3.5	3.4
	-9.5	-10.0	3.7	3.6	3.6	3.5	3.5
	-8.5	-9.1	3.8	3.7	3.7	3.6	3.6
	-7.0	-7.6	3.9	3.8	3.8	3.7	3.6
	-5.0	-5.6	4.1	4.0	4.0	3.9	3.7
	-3.0	-3.7	4.3	4.2	4.2	4.0	3.9
	0.0	-0.7	4.5	4.4	4.4	4.2	4.0
	3.0	2.2	4.7	4.7	4.6	4.4	4.2
	5.0	4.1	4.9	4.9	4.8	4.5	4.2
	7.0	6.0	5.1	5.1	5.0	4.6	4.2
9.0	7.9	5.3	5.2	5.0	4.6	4.2	
11.0	9.8	5.5	5.2	5.0	4.6	4.2	
13.0	11.8	5.6	5.3	5.0	4.6	4.2	
15.0	13.7	5.8	5.4	5.0	4.6	4.2	
056	-19.8	-20.0	3.9	3.8	3.8	3.7	3.7
	-18.8	-19.0	3.9	3.9	3.8	3.7	3.7
	-16.7	-17.0	4.0	4.0	3.9	3.8	3.8
	-14.7	-15.0	4.2	4.1	4.0	3.9	3.8
	-12.6	-13.0	4.4	4.3	4.2	4.1	4.0
	-10.5	-11.0	4.6	4.5	4.4	4.4	4.3
	-9.5	-10.0	4.7	4.6	4.6	4.5	4.4
	-8.5	-9.1	4.8	4.7	4.7	4.6	4.5
	-7.0	-7.6	4.9	4.8	4.8	4.7	4.5
	-5.0	-5.6	5.2	5.1	5.0	4.9	4.7
	-3.0	-3.7	5.4	5.3	5.3	5.1	4.9
	0.0	-0.7	5.7	5.6	5.5	5.3	5.0
	3.0	2.2	5.9	5.9	5.8	5.6	5.3
	5.0	4.1	6.2	6.1	6.0	5.7	5.3
	7.0	6.0	6.5	6.4	6.3	5.8	5.3
9.0	7.9	6.7	6.5	6.3	5.8	5.3	
11.0	9.8	6.9	6.6	6.3	5.8	5.3	
13.0	11.8	7.1	6.7	6.3	5.8	5.3	
15.0	13.7	7.3	6.8	6.3	5.8	5.3	

# 3. Capacity Table

Duct S (AM\*\*\*HNMPKH/EU)

Heating

TC: Total Capacity

Capacity Index	Outdoor Air Temp. (°C )		Indoor temperature ( °C,DB )				
			16(°C,DB)	18(°C,DB)	20(°C,DB)	22(°C,DB)	24(°C,DB)
	DB	WB	TC kW	TC kW	TC kW	TC kW	TC kW
071	-19.8	-20.0	4.9	4.9	4.8	4.7	4.7
	-18.8	-19.0	5.0	4.9	4.8	4.7	4.7
	-16.7	-17.0	5.1	5.0	4.9	4.8	4.8
	-14.7	-15.0	5.3	5.2	5.1	4.9	4.8
	-12.6	-13.0	5.5	5.4	5.3	5.2	5.1
	-10.5	-11.0	5.8	5.7	5.6	5.5	5.5
	-9.5	-10.0	6.0	5.9	5.8	5.7	5.6
	-8.5	-9.1	6.1	6.0	5.9	5.8	5.7
	-7.0	-7.6	6.2	6.1	6.0	5.9	5.8
	-5.0	-5.6	6.5	6.5	6.4	6.2	6.0
	-3.0	-3.7	6.9	6.8	6.7	6.4	6.2
	0.0	-0.7	7.2	7.1	7.0	6.7	6.4
	3.0	2.2	7.6	7.5	7.3	7.1	6.8
	5.0	4.1	7.9	7.8	7.7	7.2	6.8
	7.0	6.0	8.2	8.1	8.0	7.4	6.8
9.0	7.9	8.5	8.2	8.0	7.4	6.8	
11.0	9.8	8.7	8.4	8.0	7.4	6.8	
13.0	11.8	9.0	8.5	8.0	7.4	6.8	
15.0	13.7	9.2	8.6	8.0	7.4	6.8	
090	-19.8	-20.0	6.0	6.0	5.9	5.8	5.8
	-18.8	-19.0	6.1	6.1	6.0	5.9	5.8
	-16.7	-17.0	6.4	6.3	6.1	6.0	5.9
	-14.7	-15.0	6.7	6.5	6.3	6.2	6.1
	-12.6	-13.0	6.9	6.8	6.6	6.5	6.4
	-10.5	-11.0	7.2	7.1	7.0	6.9	6.9
	-9.5	-10.0	7.4	7.3	7.2	7.1	7.0
	-8.5	-9.1	7.6	7.5	7.4	7.2	7.1
	-7.0	-7.6	7.8	7.7	7.6	7.4	7.2
	-5.0	-5.6	8.2	8.1	8.0	7.7	7.5
	-3.0	-3.7	8.6	8.5	8.4	8.1	7.7
	0.0	-0.7	9.0	8.9	8.8	8.4	8.0
	3.0	2.2	9.4	9.3	9.2	8.8	8.4
	5.0	4.1	9.9	9.7	9.6	9.0	8.4
	7.0	6.0	10.3	10.1	10.0	9.2	8.4
9.0	7.9	10.6	10.3	10.0	9.2	8.4	
11.0	9.8	10.9	10.5	10.0	9.2	8.4	
13.0	11.8	11.2	10.6	10.0	9.2	8.4	
15.0	13.7	11.6	10.8	10.0	9.2	8.4	
112	-19.8	-20.0	7.4	7.4	7.3	7.3	7.3
	-18.8	-19.0	7.6	7.6	7.4	7.4	7.3
	-16.7	-17.0	8.1	7.8	7.6	7.5	7.4
	-14.7	-15.0	8.4	8.2	8.0	7.8	7.6
	-12.6	-13.0	8.7	8.5	8.3	8.1	8.0
	-10.5	-11.0	9.1	8.9	8.8	8.7	8.6
	-9.5	-10.0	9.3	9.1	9.0	8.9	8.8
	-8.5	-9.1	9.5	9.3	9.2	9.0	8.9
	-7.0	-7.6	9.7	9.6	9.4	9.2	9.0
	-5.0	-5.6	10.2	10.1	9.9	9.6	9.3
	-3.0	-3.7	10.7	10.6	10.5	10.1	9.7
	0.0	-0.7	11.3	11.1	11.1	10.5	10.0
	3.0	2.2	11.8	11.6	11.5	11.0	10.6
	5.0	4.1	12.3	12.2	12.0	11.3	10.6
	7.0	6.0	12.9	12.7	12.5	11.5	10.6
9.0	7.9	13.3	12.9	12.5	11.5	10.6	
11.0	9.8	13.7	13.1	12.5	11.5	10.6	
13.0	11.8	14.0	13.3	12.5	11.5	10.6	
15.0	13.7	14.4	13.5	12.5	11.5	10.6	



# 3. Capacity Table

Duct S (AM\*\*\*HNMPKH/EU)

Heating

TC: Total Capacity

Capacity Index	Outdoor Air Temp. (°C )		Indoor temperature ( °C,DB )				
			16(°C,DB)	18(°C,DB)	20(°C,DB)	22(°C,DB)	24(°C,DB)
	DB	WB	TC kW	TC kW	TC kW	TC kW	TC kW
128	-19.8	-20.0	8.1	8.1	8.0	8.0	8.0
	-18.8	-19.0	8.3	8.3	8.2	8.1	8.0
	-16.7	-17.0	8.8	8.6	8.4	8.3	8.1
	-14.7	-15.0	9.3	9.1	8.8	8.6	8.3
	-12.6	-13.0	9.6	9.4	9.2	9.0	8.8
	-10.5	-11.0	10.0	9.9	9.8	9.6	9.4
	-9.5	-10.0	10.2	10.1	10.0	9.8	9.7
	-8.5	-9.1	10.4	10.3	10.2	10.0	9.8
	-7.0	-7.6	10.7	10.6	10.4	10.2	10.0
	-5.0	-5.6	11.3	11.1	11.0	10.7	10.3
	-3.0	-3.7	11.9	11.7	11.5	11.1	10.7
	0.0	-0.7	12.4	12.3	12.1	11.6	11.0
	3.0	2.2	13.0	12.9	12.7	12.2	11.7
	5.0	4.1	13.6	13.4	13.2	12.4	11.7
	7.0	6.0	14.2	14.0	13.8	12.7	11.7
9.0	7.9	14.6	14.2	13.8	12.7	11.7	
11.0	9.8	15.1	14.4	13.8	12.7	11.7	
13.0	11.8	15.5	14.7	13.8	12.7	11.7	
15.0	13.7	15.9	14.9	13.8	12.7	11.7	
140	-19.8	-20.0	9.5	9.5	9.4	9.4	9.3
	-18.8	-19.0	9.7	9.7	9.5	9.5	9.3
	-16.7	-17.0	10.2	10.0	9.7	9.6	9.4
	-14.7	-15.0	10.8	10.5	10.2	9.9	9.6
	-12.6	-13.0	11.1	10.9	10.7	10.4	10.1
	-10.5	-11.0	11.6	11.5	11.3	11.1	10.9
	-9.5	-10.0	11.8	11.7	11.5	11.4	11.2
	-8.5	-9.1	12.1	11.9	11.8	11.6	11.3
	-7.0	-7.6	12.4	12.2	12.1	11.8	11.5
	-5.0	-5.6	13.1	12.9	12.7	12.3	12.0
	-3.0	-3.7	13.8	13.6	13.4	12.9	12.4
	0.0	-0.7	14.4	14.2	14.0	13.4	12.8
	3.0	2.2	15.1	14.9	14.7	14.1	13.5
	5.0	4.1	15.8	15.6	15.3	14.4	13.5
	7.0	6.0	16.5	16.2	16.0	14.8	13.5
9.0	7.9	17.0	16.5	16.0	14.8	13.5	
11.0	9.8	17.5	16.7	16.0	14.8	13.5	
13.0	11.8	18.0	17.0	16.0	14.8	13.5	
15.0	13.7	18.5	17.2	16.0	14.8	13.5	

# 3. Capacity Table

Duct S (AM\*\*\*HNHPKH/EU)

Cooling

TC: Total Capacity, SHC: Sensible Heat Capacity

Capacity Index	Outdoor Air Temp. (°C,DB)	Indoor temperature													
		20(°C,DB)		23(°C,DB)		26(°C,DB)		27(°C,DB)		28(°C,DB)		30(°C,DB)		32(°C,DB)	
		14(°C,WB)		16(°C,WB)		18(°C,WB)		19(°C,WB)		20(°C,WB)		22(°C,WB)		24(°C,WB)	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
112	10	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.5	8.9	13.4	8.6
	12	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.5	8.9	13.4	8.6
	14	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.5	8.9	13.4	8.6
	16	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.5	8.9	13.3	8.5
	18	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.5	8.9	13.3	8.5
	20	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	21	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	23	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	25	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	27	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	29	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	31	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	33	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.8	13.2	8.5
	35	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.7	13.2	8.5
	37	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.4	8.9	13.2	8.5
	39	7.7	6.8	9.1	7.7	10.5	8.2	11.2	8.6	11.6	8.8	12.3	8.8	13.0	8.4
42	7.7	6.8	9.1	7.7	10.4	8.1	11.1	8.5	11.5	8.7	12.1	8.6	12.7	8.2	
44	7.7	6.8	9.1	7.7	10.1	7.9	10.7	8.2	11.1	8.4	11.6	8.3	12.2	7.9	
46	7.7	6.8	9.0	7.6	10.0	7.8	10.4	8.0	10.8	8.2	11.2	8.0	11.9	7.7	
48	7.6	6.7	8.9	7.5	9.8	7.7	10.1	7.7	10.6	8.0	10.9	7.8	11.5	7.4	
128	10	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.3	10.0	15.4	9.9
	12	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.3	10.0	15.3	9.8
	14	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.3	10.0	15.3	9.8
	16	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.2	9.8
	18	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	20	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	21	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	23	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	25	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	27	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	29	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	31	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	33	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	35	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.3	9.9	14.2	9.9	15.1	9.7
	37	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.2	9.9	14.0	9.8	14.9	9.6
	39	8.8	7.8	10.4	8.9	12.0	9.5	12.8	9.9	13.1	9.8	13.8	9.6	14.5	9.4
42	8.8	7.8	10.4	8.9	11.9	9.4	12.6	9.8	12.9	9.7	13.6	9.4	14.1	9.2	
44	8.8	7.8	10.4	8.9	11.6	9.2	12.2	9.5	12.6	9.4	13.0	9.1	13.6	8.8	
46	8.8	7.8	10.3	8.8	11.4	9.0	11.8	9.2	12.2	9.1	12.6	8.8	13.3	8.6	
48	8.7	7.7	10.2	8.7	11.2	8.9	11.5	8.9	12.0	8.9	12.2	8.5	12.8	8.3	
140	10	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.6	10.9	15.7	11.0	16.8	10.9
	12	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.6	10.9	16.7	10.8
	14	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.6	10.9	16.7	10.8
	16	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.6	10.9	16.6	10.7
	18	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.6	10.7
	20	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	21	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	23	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	25	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	27	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	29	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	31	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	33	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	35	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.5	10.8	16.5	10.6
	37	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.5	10.8	15.4	10.7	16.3	10.5
	39	9.7	8.6	11.4	9.7	13.1	10.5	14.0	10.8	14.4	10.7	15.1	10.5	15.9	10.3
42	9.7	8.6	11.4	9.7	13.0	10.4	13.8	10.7	14.2	10.6	14.8	10.3	15.5	10.0	
44	9.7	8.6	11.4	9.7	12.7	10.1	13.4	10.3	13.8	10.3	14.2	9.9	15.0	9.7	
46	9.7	8.6	11.3	9.6	12.4	10.0	12.9	10.0	13.4	10.0	13.8	9.6	14.6	9.4	
48	9.6	8.5	11.1	9.5	12.2	9.8	12.6	9.7	13.1	9.8	13.4	9.3	14.1	9.1	

# 3. Capacity Table

Duct S (AM\*\*\*HNHPKH/EU)

Heating


TC: Total Capacity

Capacity Index	Outdoor Air Temp. (°C )		Indoor temperature ( °C,DB )				
			16(°C,DB)	18(°C,DB)	20(°C,DB)	22(°C,DB)	24(°C,DB)
	DB	WB	TC kW	TC kW	TC kW	TC kW	TC kW
112	-19.8	-20.0	7.4	7.4	7.3	7.3	7.3
	-18.8	-19.0	7.6	7.6	7.4	7.4	7.3
	-16.7	-17.0	8.1	7.8	7.6	7.5	7.4
	-14.7	-15.0	8.4	8.2	8.0	7.8	7.6
	-12.6	-13.0	8.7	8.5	8.3	8.1	8.0
	-10.5	-11.0	9.1	8.9	8.8	8.7	8.6
	-9.5	-10.0	9.3	9.1	9.0	8.9	8.8
	-8.5	-9.1	9.5	9.3	9.2	9.0	8.9
	-7.0	-7.6	9.7	9.6	9.4	9.2	9.0
	-5.0	-5.6	10.2	10.1	9.9	9.6	9.3
	-3.0	-3.7	10.7	10.6	10.5	10.1	9.7
	0.0	-0.7	11.3	11.1	11.1	10.5	10.0
	3.0	2.2	11.8	11.6	11.5	11.0	10.6
	5.0	4.1	12.3	12.2	12.0	11.3	10.6
	7.0	6.0	12.9	12.7	12.5	11.5	10.6
9.0	7.9	13.3	12.9	12.5	11.5	10.6	
11.0	9.8	13.7	13.1	12.5	11.5	10.6	
13.0	11.8	14.0	13.3	12.5	11.5	10.6	
15.0	13.7	14.4	13.5	12.5	11.5	10.6	
128	-19.8	-20.0	8.1	8.1	8.0	8.0	8.0
	-18.8	-19.0	8.3	8.3	8.2	8.1	8.0
	-16.7	-17.0	8.8	8.6	8.4	8.3	8.1
	-14.7	-15.0	9.3	9.1	8.8	8.6	8.3
	-12.6	-13.0	9.6	9.4	9.2	9.0	8.8
	-10.5	-11.0	10.0	9.9	9.8	9.6	9.4
	-9.5	-10.0	10.2	10.1	10.0	9.8	9.7
	-8.5	-9.1	10.4	10.3	10.2	10.0	9.8
	-7.0	-7.6	10.7	10.6	10.4	10.2	10.0
	-5.0	-5.6	11.3	11.1	11.0	10.7	10.3
	-3.0	-3.7	11.9	11.7	11.5	11.1	10.7
	0.0	-0.7	12.4	12.3	12.1	11.6	11.0
	3.0	2.2	13.0	12.9	12.7	12.2	11.7
	5.0	4.1	13.6	13.4	13.2	12.4	11.7
	7.0	6.0	14.2	14.0	13.8	12.7	11.7
9.0	7.9	14.6	14.2	13.8	12.7	11.7	
11.0	9.8	15.1	14.4	13.8	12.7	11.7	
13.0	11.8	15.5	14.7	13.8	12.7	11.7	
15.0	13.7	15.9	14.9	13.8	12.7	11.7	
140	-19.8	-20.0	9.5	9.5	9.4	9.4	9.3
	-18.8	-19.0	9.7	9.7	9.5	9.5	9.3
	-16.7	-17.0	10.2	10.0	9.7	9.6	9.4
	-14.7	-15.0	10.8	10.5	10.2	9.9	9.6
	-12.6	-13.0	11.1	10.9	10.7	10.4	10.1
	-10.5	-11.0	11.6	11.5	11.3	11.1	10.9
	-9.5	-10.0	11.8	11.7	11.5	11.4	11.2
	-8.5	-9.1	12.1	11.9	11.8	11.6	11.3
	-7.0	-7.6	12.4	12.2	12.1	11.8	11.5
	-5.0	-5.6	13.1	12.9	12.7	12.3	12.0
	-3.0	-3.7	13.8	13.6	13.4	12.9	12.4
	0.0	-0.7	14.4	14.2	14.0	13.4	12.8
	3.0	2.2	15.1	14.9	14.7	14.1	13.5
	5.0	4.1	15.8	15.6	15.3	14.4	13.5
	7.0	6.0	16.5	16.2	16.0	14.8	13.5
9.0	7.9	17.0	16.5	16.0	14.8	13.5	
11.0	9.8	17.5	16.7	16.0	14.8	13.5	
13.0	11.8	18.0	17.0	16.0	14.8	13.5	
15.0	13.7	18.5	17.2	16.0	14.8	13.5	

# 4. Dimensional Drawing

## Duct S

AM036HNMPKH/EU, AM045HNMPKH/EU, AM056HNMPKH/EU, AM071HNMPKH/EU

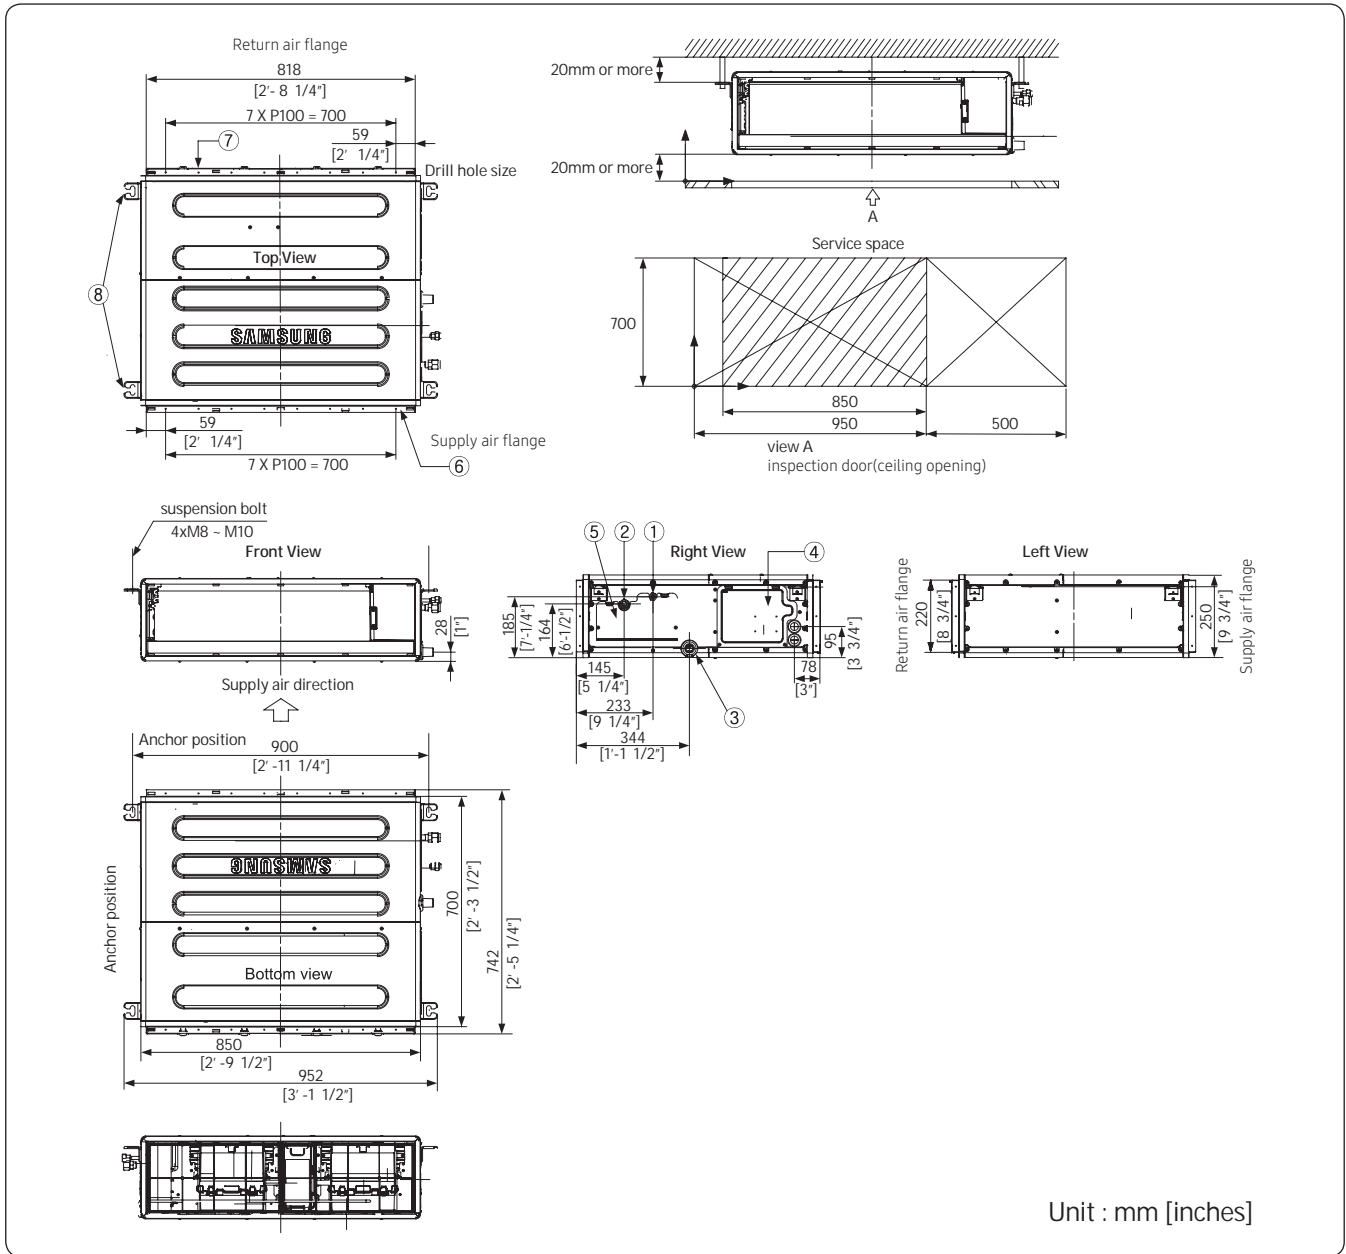


No.	Name	Description	
		~ 5.6 kW	7.1 kW
①	Refrigerant liquid pipe	Ø6.35 [1/4"] Flare	Ø9.52 [3/8"] Flare
②	Refrigerant gas pipe	Ø12.7 [1/2"] Flare	Ø15.88 [5/8"] Flare
③	Condensate drain	VP25 (OD 32, ID 25)	
④	Power & Comm. wiring conduits	-	
⑤	Refrigerant pipe conduits	-	
⑥	Supply air flange	-	
⑦	Return air flange	-	
⑧	Hook	-	

# 4. Dimensional Drawing

## Duct S

AM090HNMPKH/EU

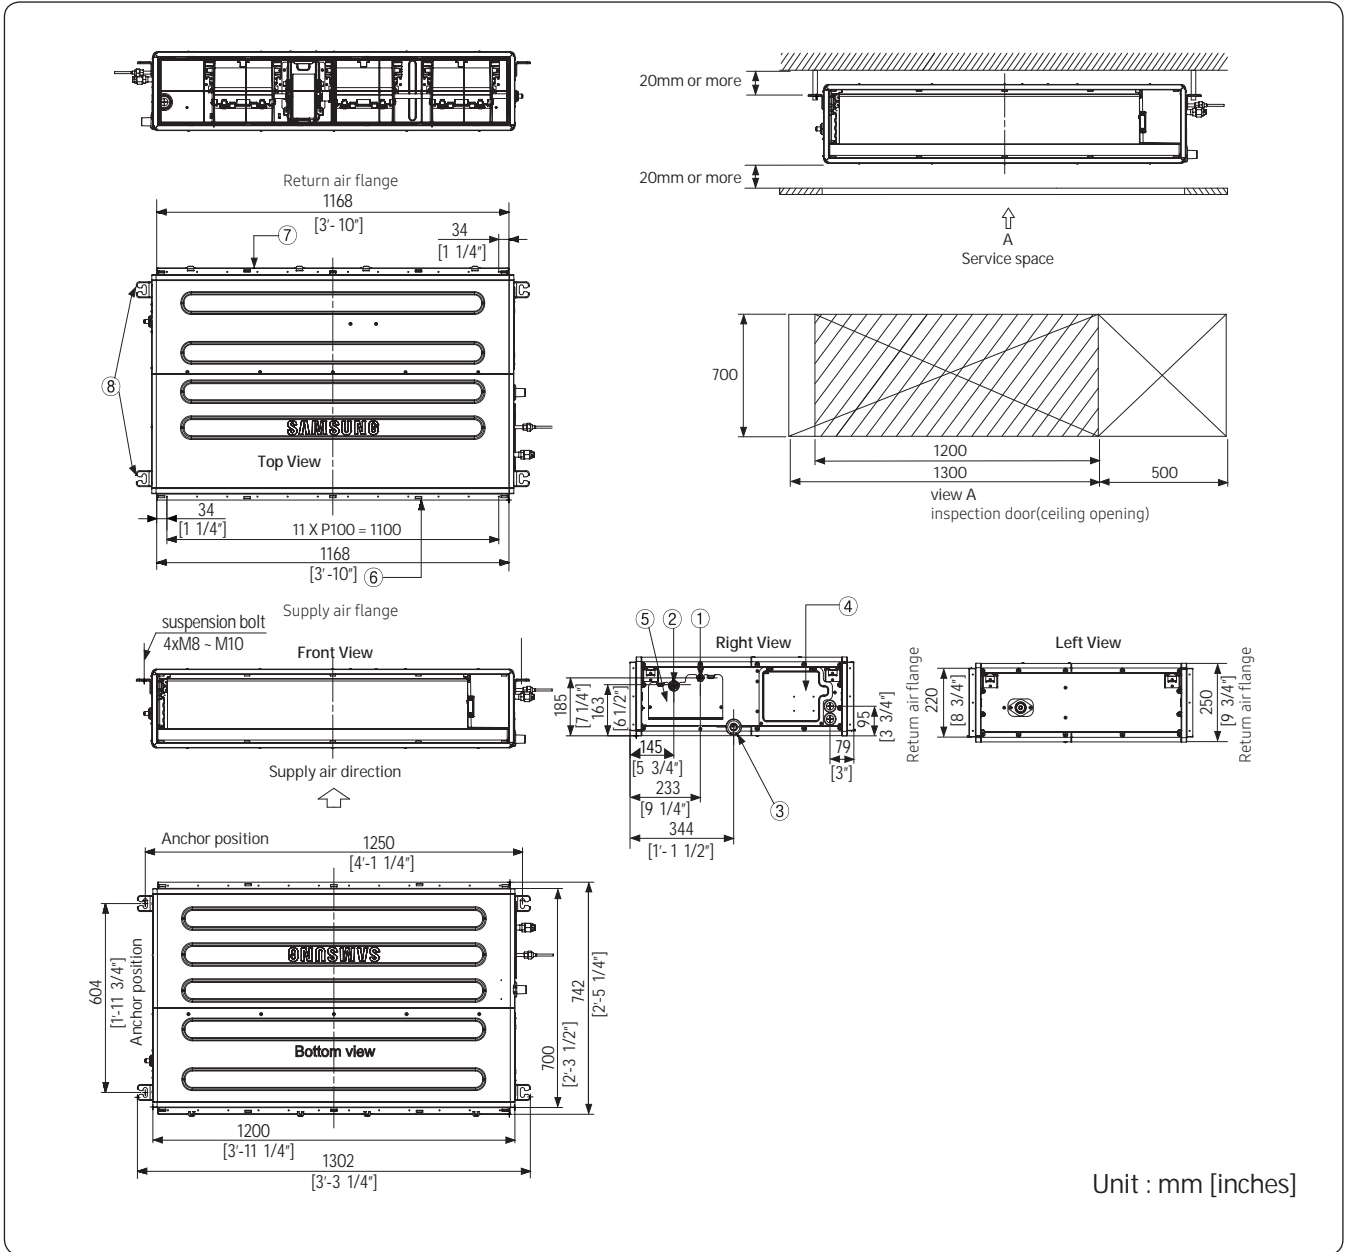


No.	Name	Description
①	Refrigerant liquid pipe	Ø9.52 [3/8"] Flare connection
②	Refrigerant gas pipe	Ø15.88 [5/8"] Flare connection
③	Condensate drain	VP25 (OD 32, ID 25)
④	Power & Comm. wiring conduits	-
⑤	Refrigerant pipe conduits	-
⑥	Supply air flange	-
⑦	Return air flange	-
⑧	Hook	-

# 4. Dimensional Drawing

## Duct S


AM112HNMPKH/EU, AM128HNMPKH/EU, AM140HNMPKH/EU, AM112HNHPKH/EU, AM128HNHPKH/EU, AM140HNHPKH/EU

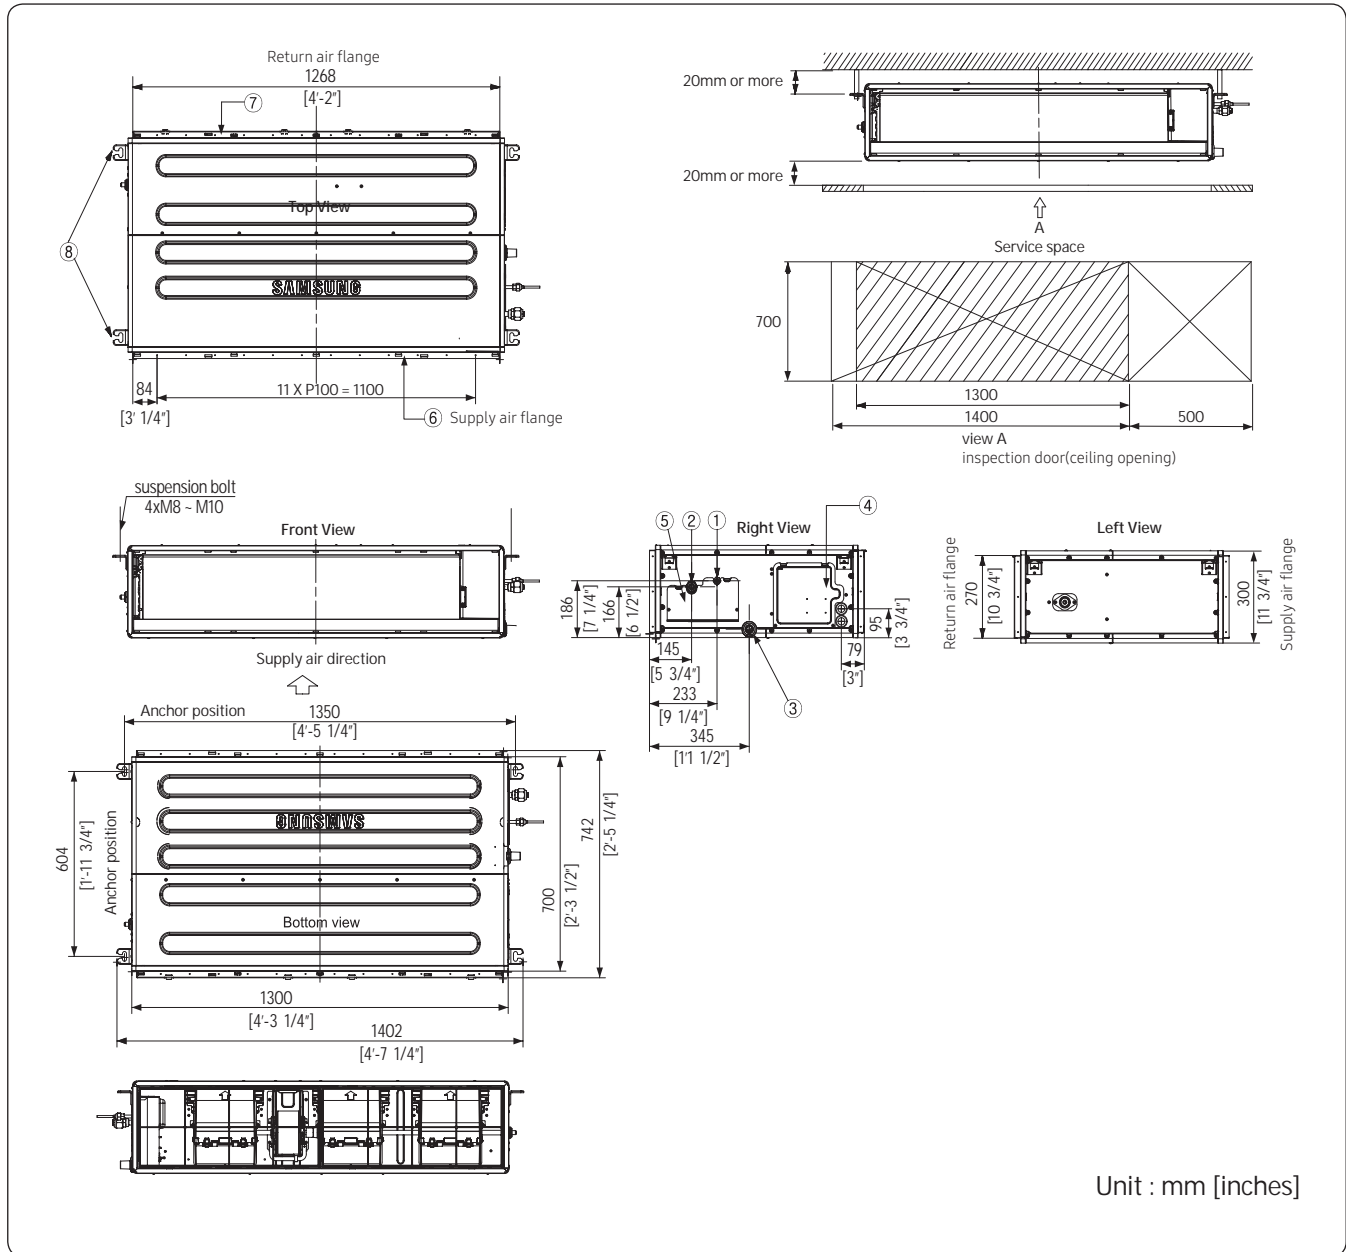

No.	Name	Description
①	Refrigerant liquid pipe	Ø9.52 [3/8"] Flare connection
②	Refrigerant gas pipe	Ø15.88 [5/8"] Flare connection
③	Condensate drain	VP25 (OD 32, ID 25)
④	Power & Comm. wiring conduits	-
⑤	Refrigerant pipe conduits	-
⑥	Supply air flange	-
⑦	Return air flange	-
⑧	Hook	-

# 5. Center of Gravity

## Duct S

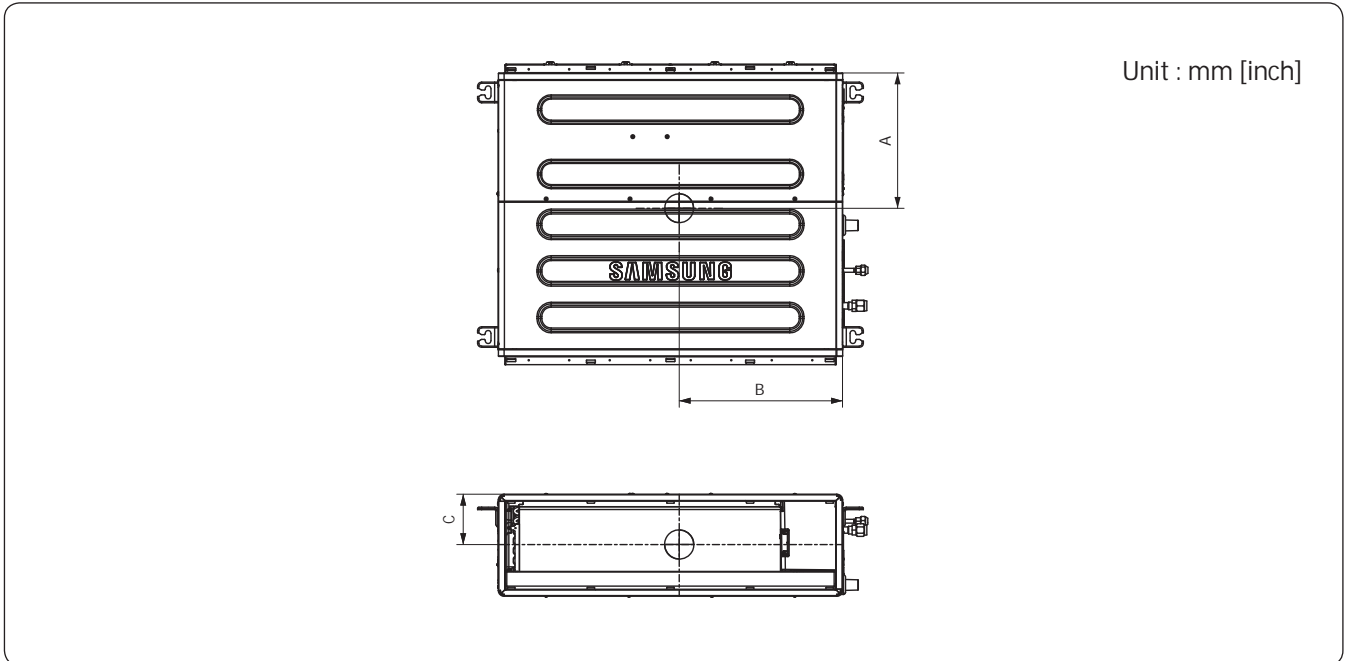


Model	A	B	C
3.6kW / 4.5kW / 5.6kW / 7.1kW	334	403	125
9.0kW	266	564	125
11.2kW / 12.8kW / 14.0kW	266	650	150

# 6. Electrical Wiring Diagram

## Duct S

AM036HNMPKH/EU, AM045HNMPKH/EU, AM056HNMPKH/EU, AM071HNMPKH/EU, AM090HNMPKH/EU, AM112HNMPKH/EU, AM128HNMPKH/EU, AM140HNMPKH/EU

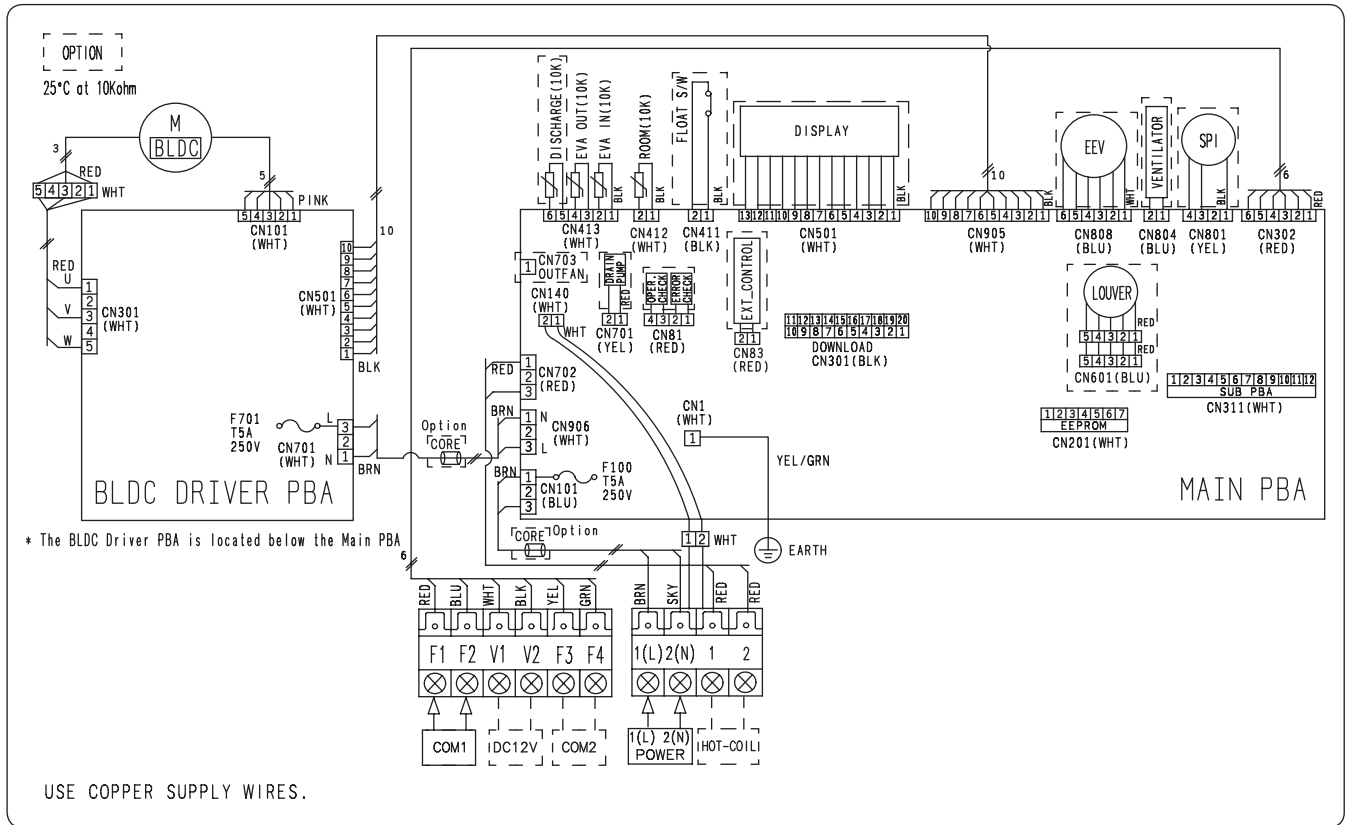

MAIN PBA	Printed Circuit board(MAIN)	EEV	electronic expansion valve	DISCHARGE(10K)	Thermistor DISCHARGE(10K)
BLDC DRIVER PBA	Printed Circuit board(BLDC DRIVER)	SPI		EVA-OUT(10K)	Thermistor EVA OUT(10K)
EMI PBA	Printed Circuit board(emi)	ROOM(10K)	Thermistor ROOM OUT(10K)	EVA-IN(10K)	Thermistor EVA IN(10K)

### NOTE


- This wiring diagram applies only to the Indoor unit.
- Symbols show as follow :  
blk: black, red: red, blu: blue, wht: white, yel: yellow, brn: brown, sky: sky blue, grn: green
- For connection wiring indoor-outdoor transmission F1-F2, indoor-wired remote controller transmission F3-F4.
- ⊕ Protective earth(SCREW)



# 6. Electrical Wiring Diagram

## Duct S

AM112HNHPKH/EU, AM128HNHPKH/EU, AM140HNHPKH/EU

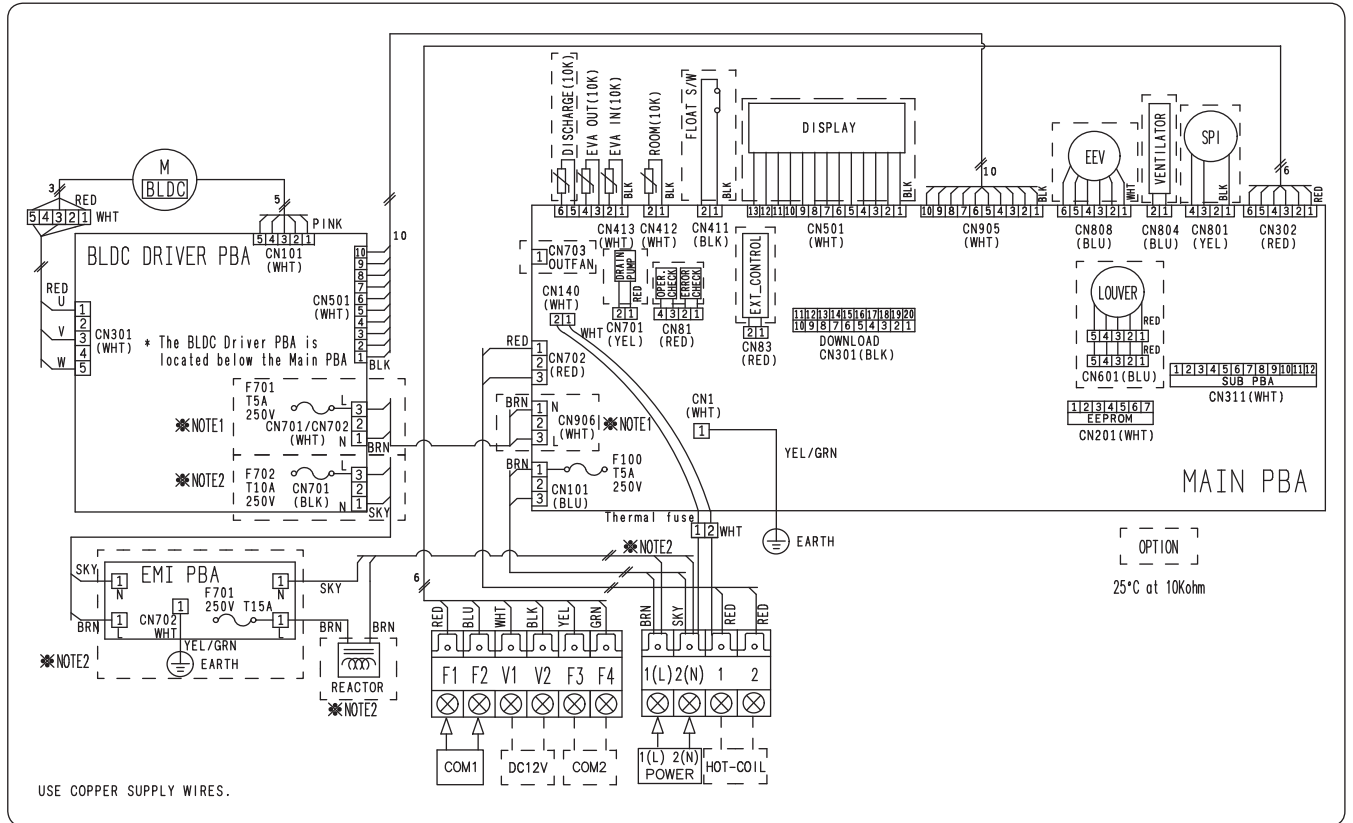


MAIN PBA	Printed Circuit board(MAIN)	EEV	electronic expansion valve	DISCHARGE(10K)	Thermistor DISCHARGE(10K)
BLDC DRIVER PBA	Printed Circuit board(BLDC DRIVER)	SPI		EVA-OUT(10K)	Thermistor EVA OUT(10K)
EMI PBA	Printed Circuit board(emi)	ROOM(10K)	Thermistor ROOM OUT(10K)	EVA-IN(10K)	Thermistor EVA IN(10K)

### NOTE

- This wiring diagram applies only to the Indoor unit.
- Symbols show as follow :  
blk: black, red: red, blu: blue, wht: white, yel: yellow, brn: brown, sky: sky blue, grn: green
- For connection wiring indoor-outdoor transmission F1-F2, indoor-wired remote controller transmission F3-F4.
- ⊕ Protective earth(SCREW)

# 7. Sound Data

## Sound pressure level

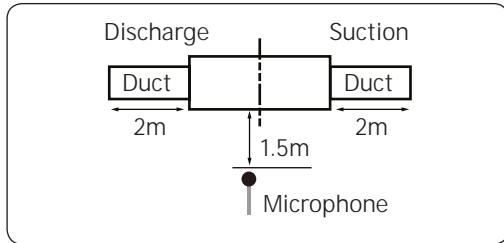


Unit: dB(A)


MODEL	HIGH	MID	LOW
AM036HNMPKH/EU	29	26	23
AM045HNMPKH/EU	31	28	24

## NR Curve

### 1) AM036HNMPKH/EU

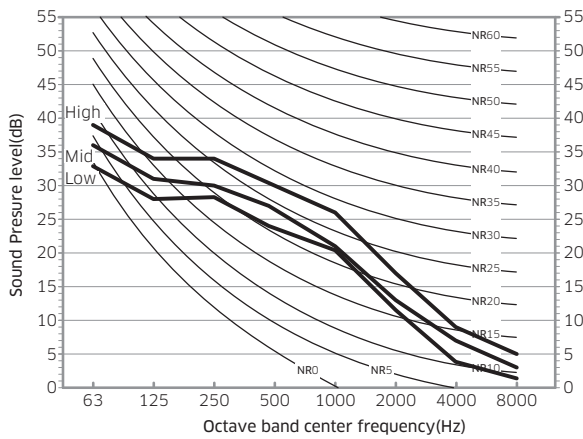

### 2) AM045HNMPKH/EU

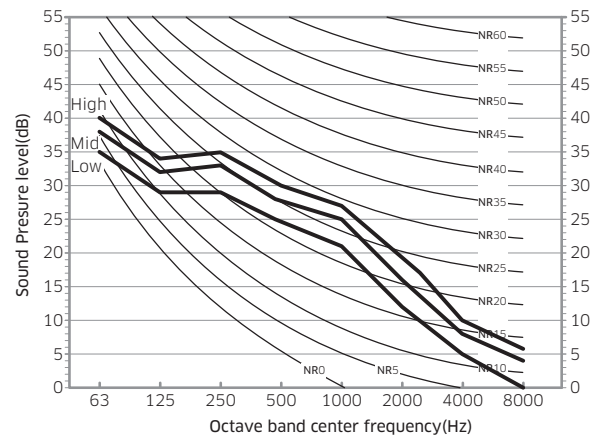

Fan options		ESP mmAq	Sound Pressure (dBA)		
			High	Mid	Low
Default	010054-1C5081-202424-331205	2.5	29	26	23
Option	010054-1C50E3-202424-331205	5.0	32	29	27
	010054-1C5459-202424-331205	7.5	33	30	28
	010054-1C54CD-202424-331205	10.0	34	31	29
	010054-1C5931-202424-331205	12.5	35	32	30
	010054-1C5983-202424-331205	15.0	35	33	31


Fan options		ESP mmAq	Sound Pressure (dBA)		
			High	Mid	Low
Default	010054-1C50D1-202D2D-331204	3.0	31	28	24
Option	010054-1C5453-202D2D-331204	6.0	33	31	28
	010054-1C5453-202D2D-331205	9.0	34	32	29
	010054-1C5453-202D2D-331206	12.0	35	33	30
	010054-1C5453-202D2D-331207	15.0	36	34	31

## NOTE

- Specifications may be subject to change without prior notice.
  - Sound pressure level is obtained in an anechoic room.
  - Sound pressure level is a relative value, depending on the distance and acoustic environment.
  - Sound pressure level may differ depending on operation condition.
  - dBA = A-weighted sound pressure level.
  - Reference acoustic pressure 0 dB = 20μPa

# 7. Sound Data

## Sound pressure level

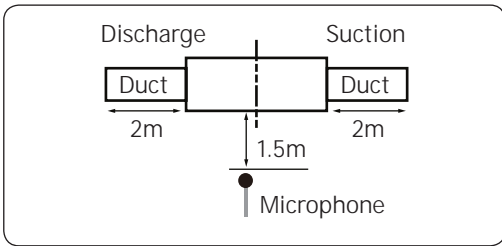


Unit: dB(A)

MODEL	HIGH	MID	LOW
AM056HNMPKH/EU	32	29	25
AM071HNMPKH/EU	37	33	29


## NR Curve

3) AM056HNMPKH/EU

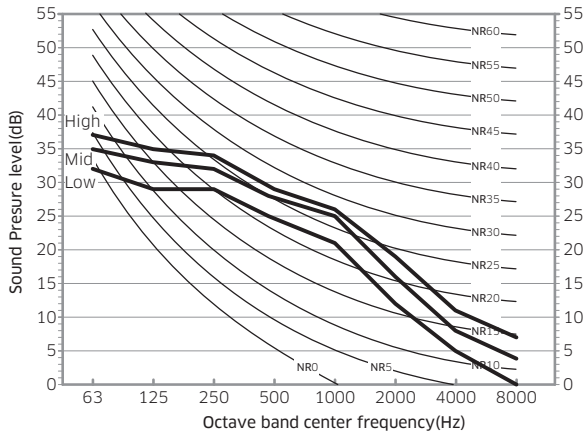

Fan options		ESP mmAq	Sound Pressure (dBA)		
			High	Mid	Low
Default	010054-1C50F1-203838-331203	3.0	32	29	25
Option	010054-1C5447-203838-331203	6.0	34	32	30
	010054-1C54AB-203838-331203	9.0	35	33	31
	010054-1C581F-203838-331203	12.0	36	34	32
	010054-1C5973-203838-331203	15.0	39	37	34

4) AM071HNMPKH/EU

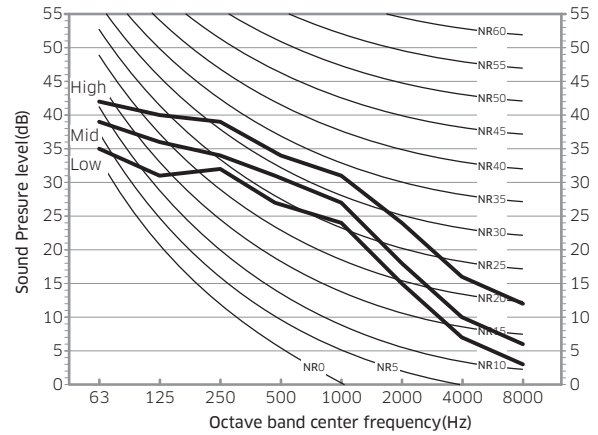


Fan options		ESP mmAq	Sound Pressure (dBA)		
			High	Mid	Low
Default	010054-1C548D-204747-331201	3.0	37	33	29
Option	010054-1C55E1-204747-331201	6.0	38	35	31
	010054-1C5935-204747-331201	9.0	40	37	33
	010054-1C5989-204747-331201	12.0	41	38	34
	010054-1C59DF-204747-331201	15.0	43	41	35

### NOTE

- Specifications may be subject to change without prior notice.
  - Sound pressure level is obtained in an anechoic room.
  - Sound pressure level is a relative value, depending on the distance and acoustic environment.
  - Sound pressure level may differ depending on operation condition.
  - dBA = A-weighted sound pressure level.
  - Reference acoustic pressure 0 dB = 20μPa

# 7. Sound Data

## Sound pressure level

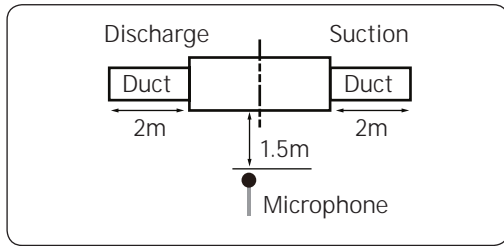


Unit: dB(A)


MODEL	HIGH	MID	LOW
AM090HNMPKH/EU	38	35	32
AM112HNMPKH/EU	38	35	32

## NR Curve

### 1) AM090HNMPKH/EU

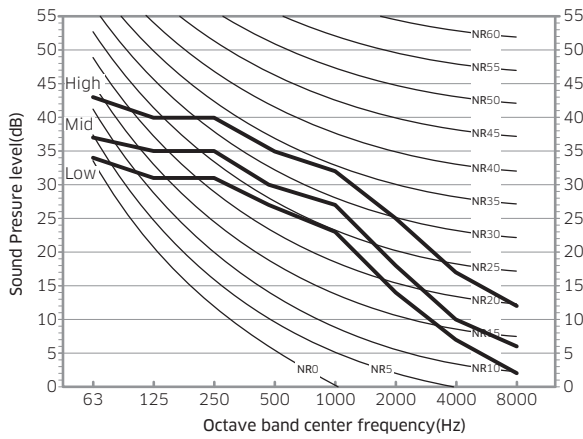

### 2) AM112HNMPKH/EU

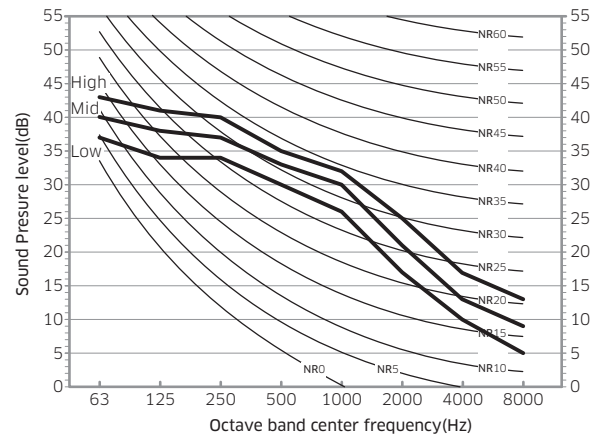

Fan options		ESP	Sound Pressure (dBA)		
			mmAq	High	Mid
Default	010054-1C546D-205A5A-331212	4.0	38	35	32
Option	010054-1C55E3-205A5A-331212	8.0	40	37	35
	010054-1C5969-205A5A-331212	12.0	42	40	38
	010054-1C59CD-205A5A-331212	15.0	45	43	40


Fan options		ESP	Sound Pressure (dBA)		
			mmAq	High	Mid
Default	010054-1C5412-207070-331223	5.2	38	35	32
Option	010054-1C5466-207070-331223	8.0	40	37	33
	010054-1C54EA-207070-331223	12.0	43	42	41
	010054-1C583E-207070-331223	15.0	46	45	44

## NOTE

- Specifications may be subject to change without prior notice.
  - Sound pressure level is obtained in an anechoic room.
  - Sound pressure level is a relative value, depending on the distance and acoustic environment.
  - Sound pressure level may differ depending on operation condition.
  - dBA = A-weighted sound pressure level.
  - Reference acoustic pressure 0 dB = 20μPa

# 7. Sound Data

## Sound pressure level

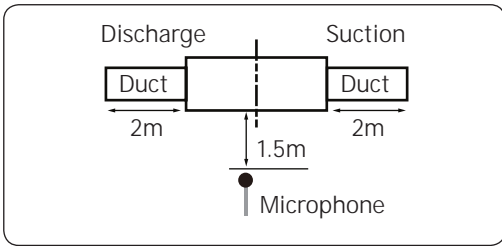


Unit: dB(A)

MODEL	HIGH	MID	LOW
AM128HNMPKH/EU	39	36	33
AM140HNMPKH/EU	40	37	33


## NR Curve

### 3) AM128HNMPKH/EU

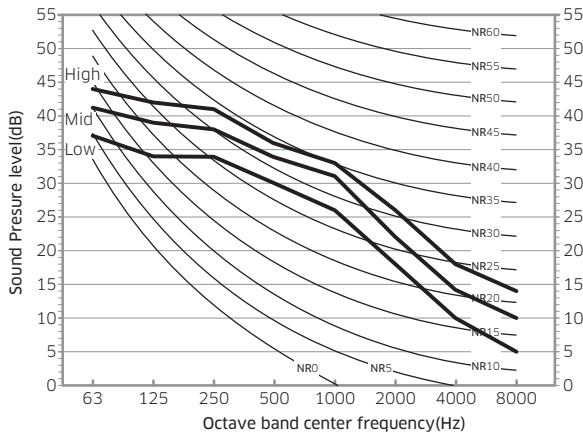

Fan options		ESP mmAq	Sound Pressure (dBA)		
			High	Mid	Low
Default	010054-1C5426-208080-331222	5.2	39	36	33
Option	010054-1C5478-208080-331222	8.0	42	39	35
	010054-1C54EE-208080-331222	12.0	44	43	42
	010054-1C5920-208080-331222	15.0	47	46	45

### 4) AM140HNMPKH/EU

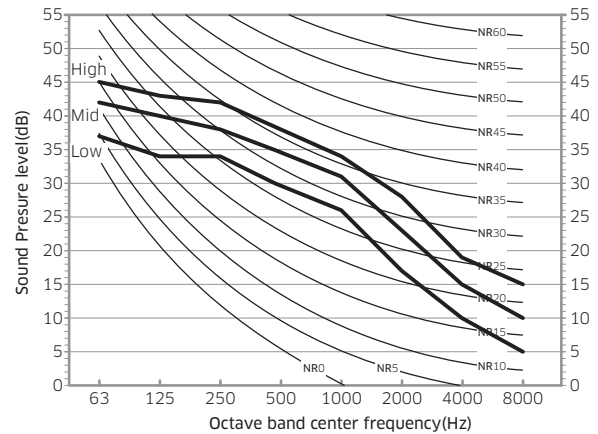


Fan options		ESP mmAq	Sound Pressure (dBA)		
			High	Mid	Low
Default	010054-1C5444-208C8C-331221	5.2	40	37	33
Option	010054-1C5498-208C8C-331221	8.0	44	40	35
	010054-1C54FA-208C8C-331221	12.0	45	43	42
	010054-1C583E-208C8C-331221	15.0	48	46	45

## NOTE

- Specifications may be subject to change without prior notice.
  - Sound pressure level is obtained in an anechoic room.
  - Sound pressure level is a relative value, depending on the distance and acoustic environment.
  - Sound pressure level may differ depending on operation condition.
  - dBA = A-weighted sound pressure level.
  - Reference acoustic pressure 0 dB = 20μPa

# 7. Sound Data

## Sound pressure level

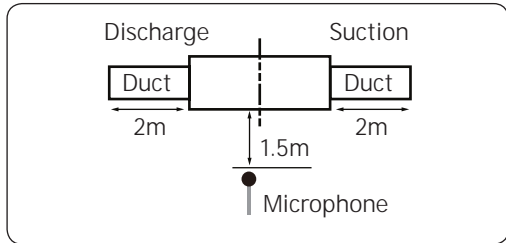


Unit: dB(A)


MODEL	HIGH	MID	LOW
AM112HNHPKH/EU	38	35	32
AM128HNHPKH/EU	39	36	33

## NR Curve

1) AM112HNHPKH/EU

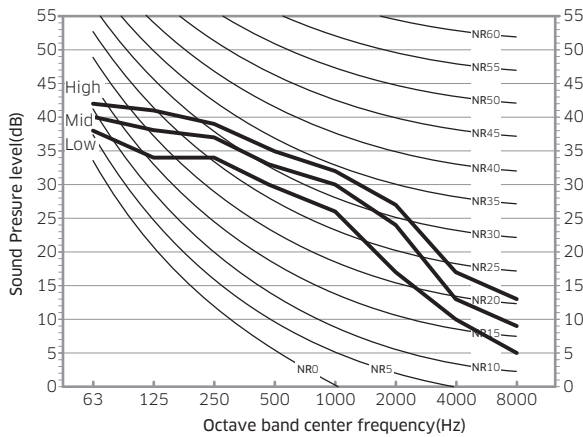

2) AM128HNHPKH/EU

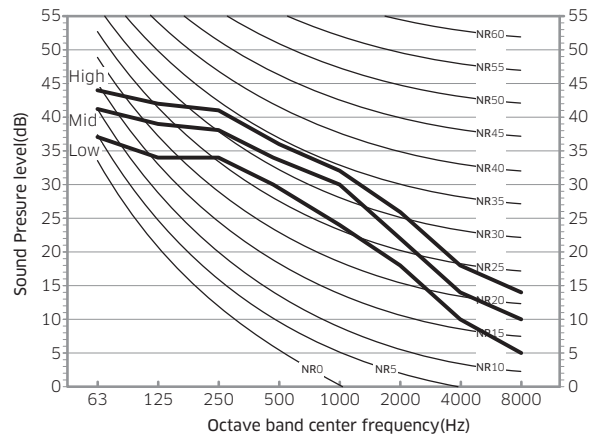

Fan options		ESP	Sound Pressure (dBA)		
			mmAq	High	Mid
Default	010054-1C5446-207070-331226	6.2	38	35	32
Option	010054-1C54A7-207070-331226	9.0	40	37	33
	010054-1C54C9-207070-331226	11.0	42	41	40
	010054-1C580B-207070-331226	13.0	43	42	41
	010054-1C584D-207070-331226	15.0	46	45	44
	010054-1C587F-207070-331226	17.0	47	46	45
	010054-1C59A1-207070-331226	19.0	48	47	46
	010054-1C59B2-207070-331226	20.0	49	48	47


Fan options		ESP	Sound Pressure (dBA)		
			mmAq	High	Mid
Default	010054-1C5466-208080-331225	6.2	39	36	33
Option	010054-1C54B9-208080-331225	9.0	42	39	35
	010054-1C54EC-208080-331225	11.0	44	43	42
	010054-1C581E-208080-331225	13.0	46	45	44
	010054-1C5940-208080-331225	15.0	47	46	45
	010054-1C5982-208080-331225	17.0	48	47	46
	010054-1C59B3-208080-331225	19.0	49	48	47
	010054-1C59C4-208080-331225	20.0	50	49	48

## NOTE

- Specifications may be subject to change without prior notice.
  - Sound pressure level is obtained in an anechoic room.
  - Sound pressure level is a relative value, depending on the distance and acoustic environment.
  - Sound pressure level may differ depending on operation condition.
  - dBA = A-weighted sound pressure level.
  - Reference acoustic pressure 0 dB = 20μPa

# 7. Sound Data

## Sound pressure level

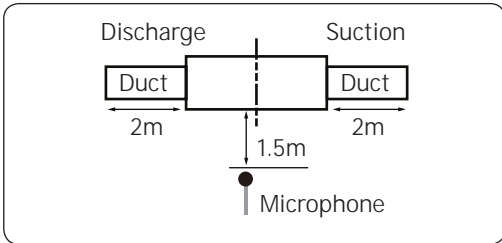


Unit: dB(A)

MODEL	HIGH	MID	LOW
AM140HNHPKH/EU	40	37	34

## NR Curve

### 3) AM140HNHPKH/EU

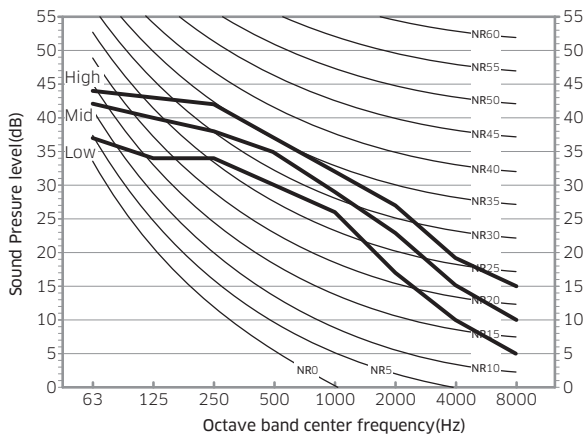

Fan options		ESP mmAq	Sound Pressure (dBA)		
			High	Mid	Low
Default	010054-1C5486-208C8C-331224	6.2	40	37	34
Option	010054-1C54D7-208C8C-331224	9.0	44	40	35
	010054-1C5809-208C8C-331224	11.0	45	43	42
	010054-1C583B-208C8C-331224	13.0	47	45	44
	010054-1C586D-208C8C-331224	15.0	48	46	45
	010054-1C588F-208C8C-331224	17.0	49	47	46
	010054-1C59C0-208C8C-331224	19.0	50	48	47
	010054-1C59D1-208C8C-331224	20.0	51	49	48

### NOTE

- Specifications may be subject to change without prior notice.
  - Sound pressure level is obtained in an anechoic room.
  - Sound pressure level is a relative value, depending on the distance and acoustic environment.
  - Sound pressure level may differ depending on operation condition.
  - dBA = A-weighted sound pressure level.
  - Reference acoustic pressure 0 dB = 20μPa


# 7. Sound Data

## Sound power level


Unit: dB(A)

MODEL	Power	MODEL	Power
AM036HNMPKH/EU	47	AM056HNMPKH/EU	49
AM045HNMPKH/EU	49	AM071HNMPKH/EU	57


1) AM036HNMPKH/EU

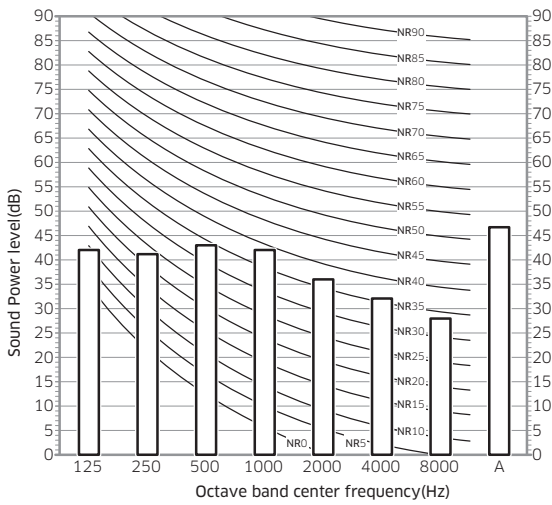


2) AM045HNMPKH/EU

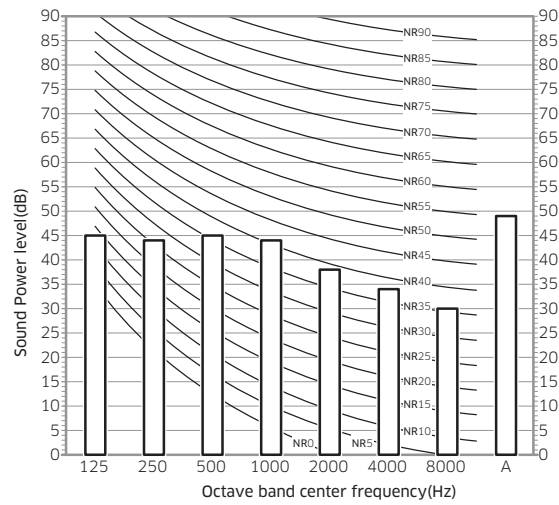

3) AM056HNMPKH/EU

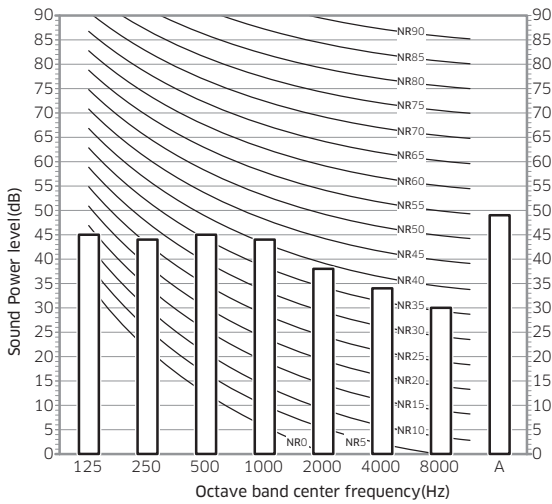

4) AM071HNMPKH/EU

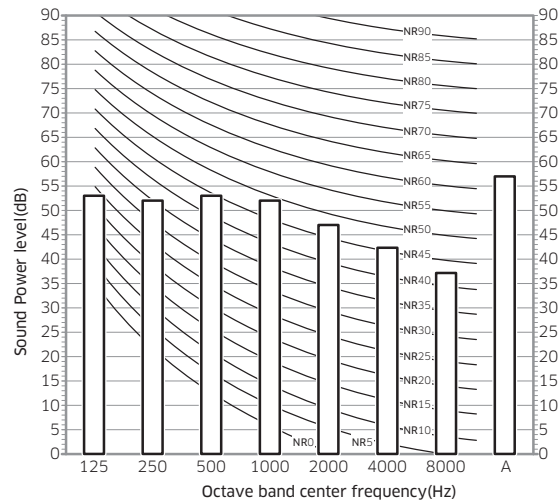

### NOTE

- Specifications may be subject to change without prior notice
  - Sound power level is an absolute value that a sound source generates
  - dBA = A-weighted sound power level
  - Reference power : 1pW
  - Measured according to ISO 3741




# 7. Sound Data

## Sound power level


Unit: dB(A)

MODEL	Power	MODEL	Power
AM090HNMPKH/EU	58	AM128HNMPKH/EU	62
AM112HNMPKH/EU	62	AM140HNMPKH/EU	64


1) AM090HNMPKH/EU

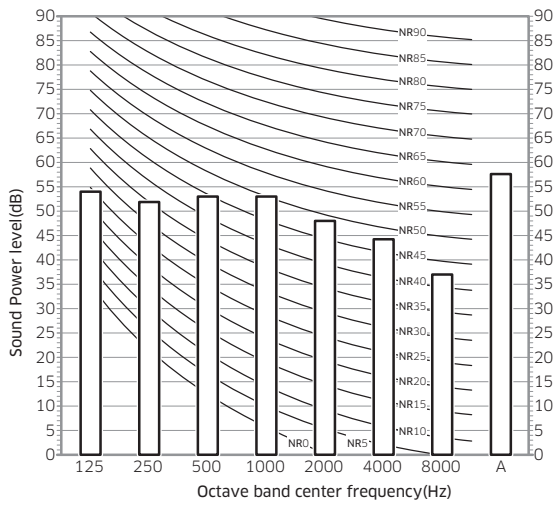


2) AM112HNMPKH/EU

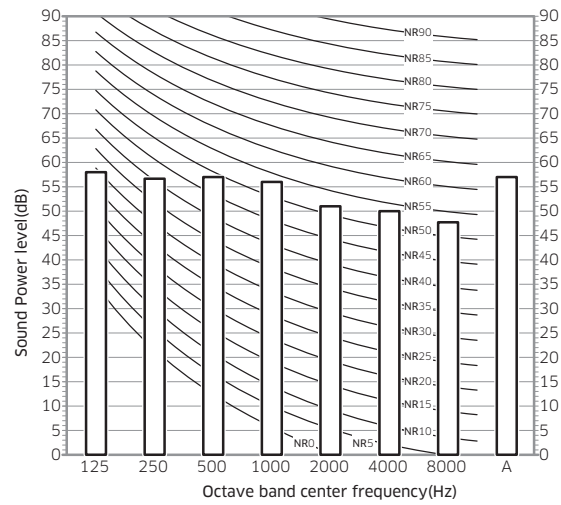

3) AM128HNMPKH/EU

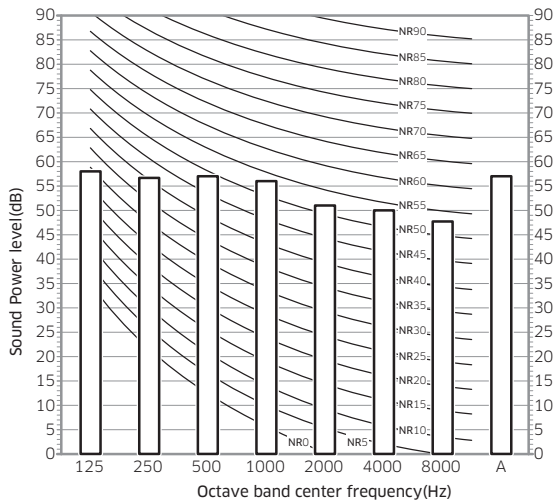

4) AM140HNMPKH/EU

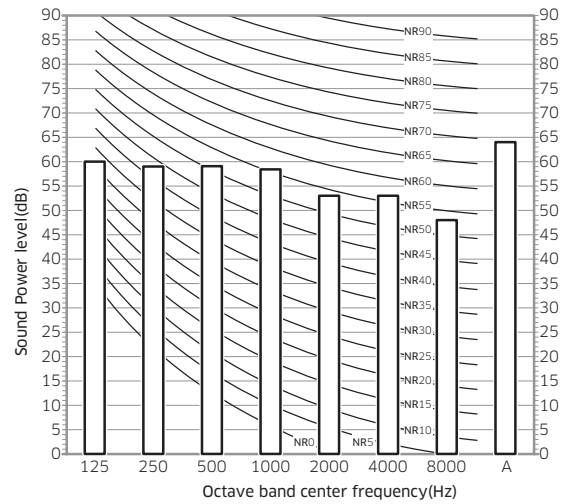

### NOTE

- Specifications may be subject to change without prior notice
  - Sound power level is an absolute value that a sound source generates
  - dBA = A-weighted sound power level
  - Reference power : 1pW
  - Measured according to ISO 3741


# 7. Sound Data

## Sound power level


Unit: dB(A)

MODEL	Power	MODEL	Power
AM112HNHPKH/EU	63	AM140HNHPKH/EU	65
AM128HNHPKH/EU	63		


1) AM112HNHPKH/EU

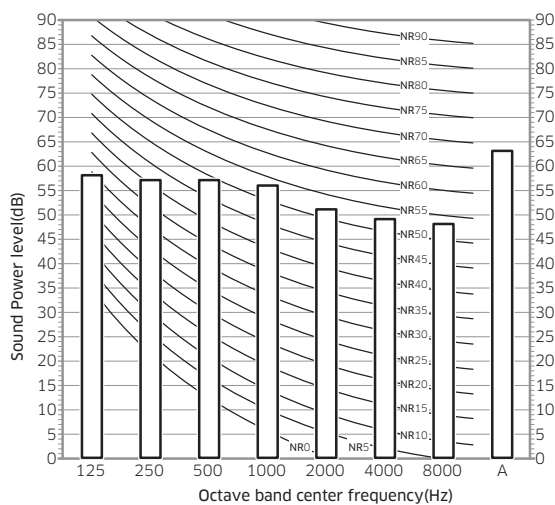

2) AM128HNHPKH/EU

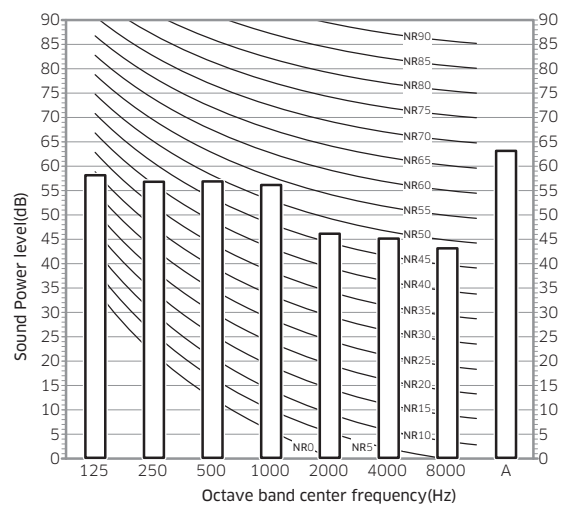

3) AM140HNHPKH/EU

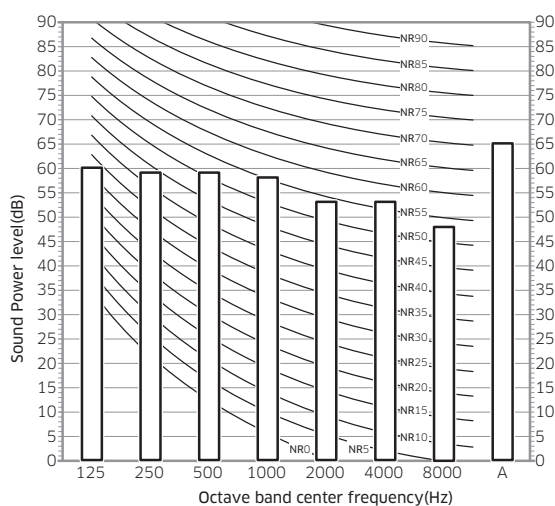


### NOTE

- Specifications may be subject to change without prior notice
  - Sound power level is an absolute value that a sound source generates
  - dBA = A-weighted sound power level
  - Reference power : 1pW
  - Measured according to ISO 3741


# 8. Fan Characteristics

## 1) AM036HNMPKH/EU


①	External Static Pressure(mmAq)	Option Code
	$0 < SP \leq 2.5$	010054-1C5081-202424-331205

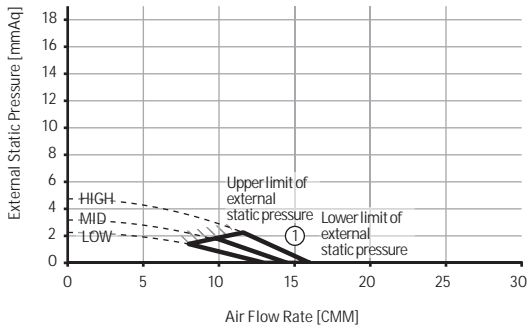


②	External Static Pressure(mmAq)	Option Code
	$2.5 < SP \leq 5$	010054-1C50E3-202424-331205

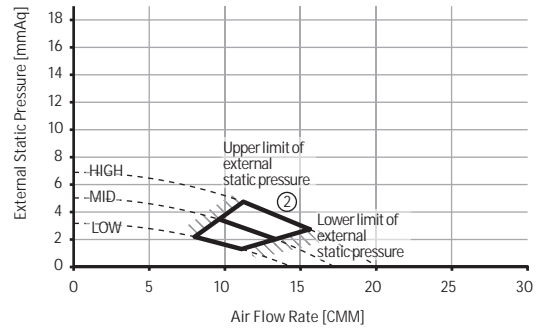


③	External Static Pressure(mmAq)	Option Code
	$5 < SP \leq 7.5$	010054-1C5459-202424-331205

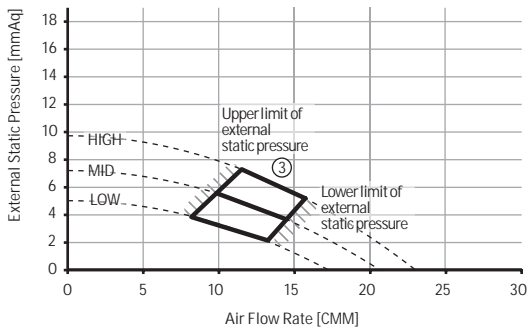


④	External Static Pressure(mmAq)	Option Code
	$7.5 < SP \leq 10$	010054-1C54CD-202424-331205

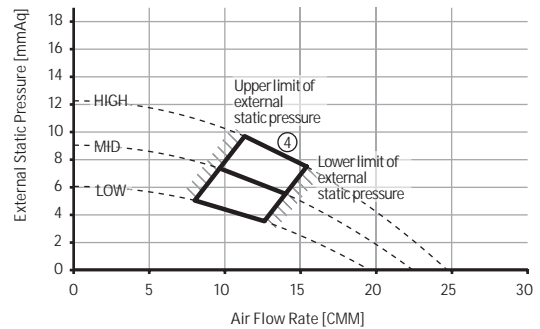

⑤	External Static Pressure(mmAq)	Option Code
	$10 < SP \leq 12.5$	010054-1C5931-202424-331205

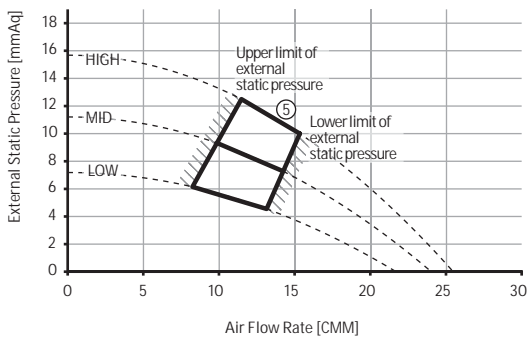

⑥	External Static Pressure(mmAq)	Option Code
	$12.5 < SP \leq 15$	010054-1C5983-202424-331205

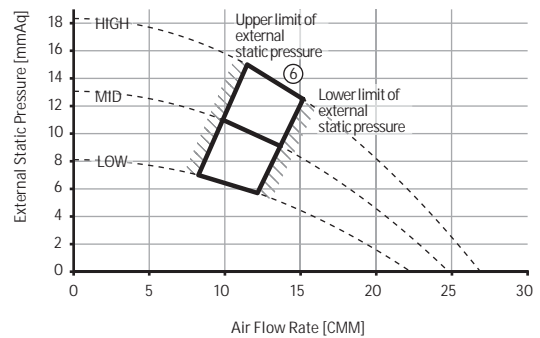

### Note

Adjust option code according to the actual installation condition (external static pressure).


ESP = External Static Pressure

The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.


# 8. Fan Characteristics

## 2) AMO45HNMPKH/EU


①	External Static Pressure(mmAq)	Option Code
	$0 \leq SP \leq 3$	010054-1C50D1-202D2D-331204

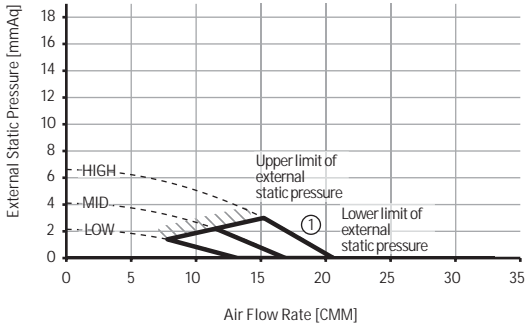


②	External Static Pressure(mmAq)	Option Code
	$3 < SP \leq 6$	010054-1C5453-202D2D-331204

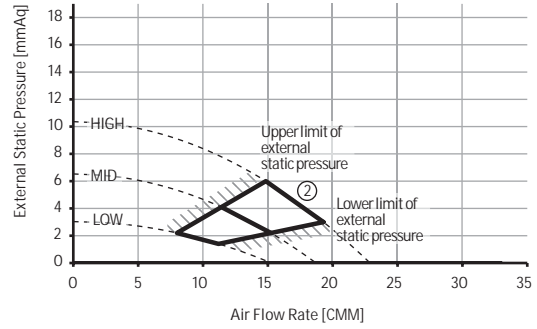


③	External Static Pressure(mmAq)	Option Code
	$6 < SP \leq 9$	010054-1C54C7-202D2D-331204

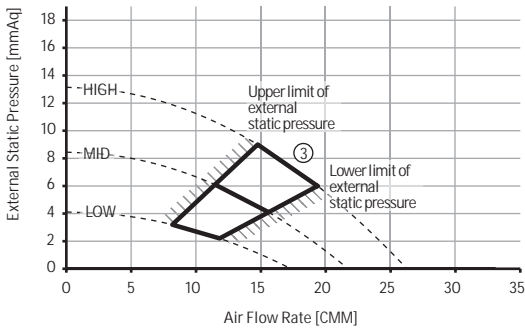

④	External Static Pressure(mmAq)	Option Code
	$9 < SP \leq 12$	010054-1C583B-202D2D-331204

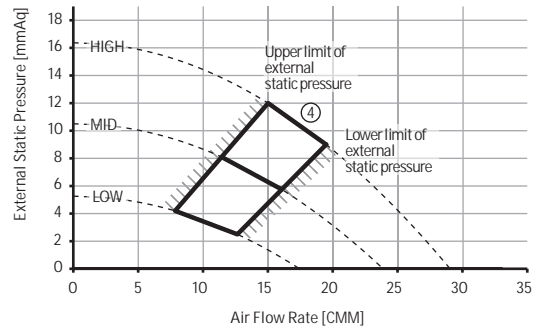

⑤	External Static Pressure(mmAq)	Option Code
	$12 < SP \leq 15$	010054-1C58AF-202D2D-331204

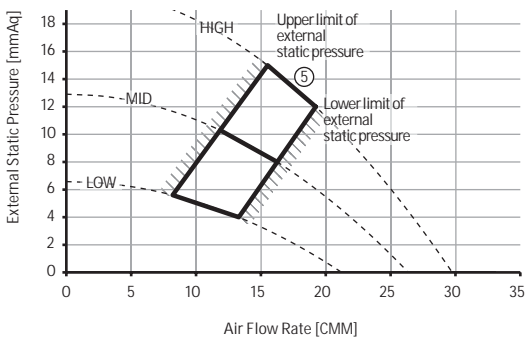

### Note

Adjust option code according to the actual installation condition (external static pressure).


ESP = External Static Pressure

The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.


# 8. Fan Characteristics

## 3) AM056HNMPKH/EU


①	External Static Pressure(mmAq)	Option Code
	0 ≤ SP ≤ 3	010054-1C50F1-203838-331203

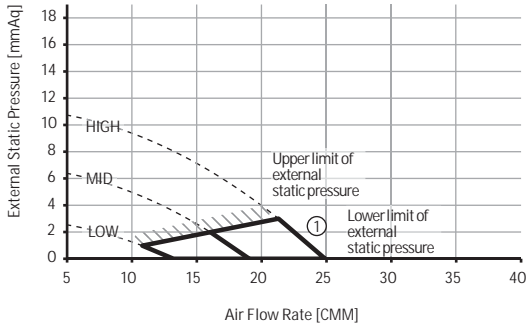


②	External Static Pressure(mmAq)	Option Code
	3 < SP ≤ 6	010054-1C5447-203838-331203

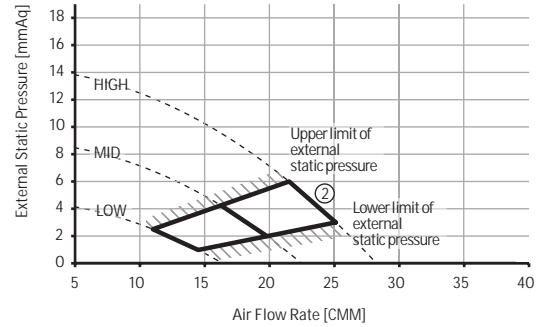


③	External Static Pressure(mmAq)	Option Code
	6 < SP ≤ 9	010054-1C54AB-203838-331203

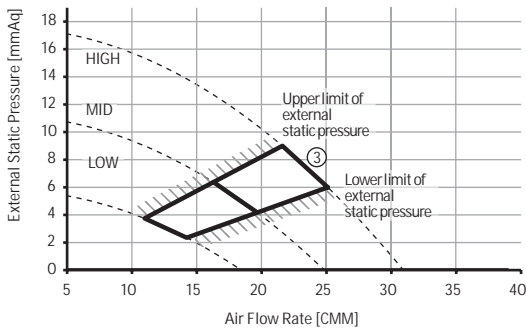

④	External Static Pressure(mmAq)	Option Code
	9 < SP ≤ 12	010054-1C581F-203838-331203

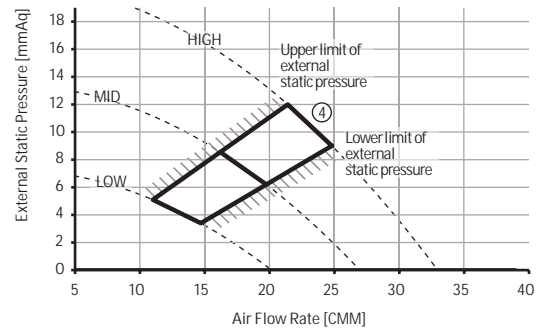

⑤	External Static Pressure(mmAq)	Option Code
	12 < SP ≤ 15	010054-1C5973-203838-331203

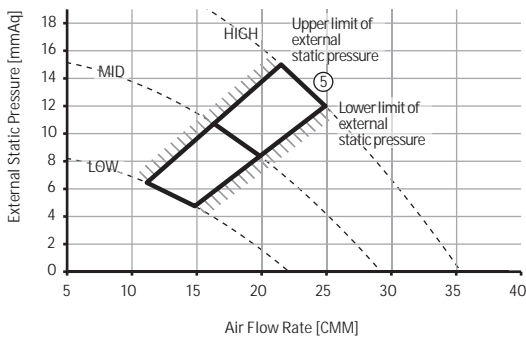

### Note

Adjust option code according to the actual installation condition (external static pressure).


ESP = External Static Pressure

The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.


# 8. Fan Characteristics

## 4) AM071HNMPKH/EU


①	External Static Pressure(mmAq)	Option Code
	$0 \leq SP \leq 3$	010054-1C548D-204747-331201

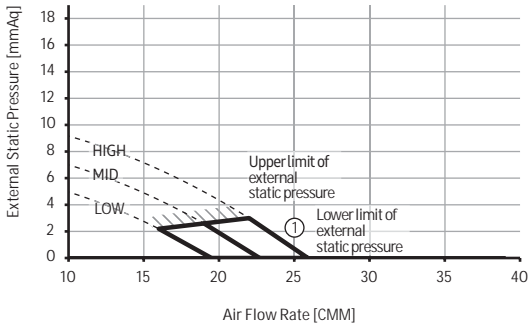


②	External Static Pressure(mmAq)	Option Code
	$3 < SP \leq 6$	010054-1C55E1-204747-331201

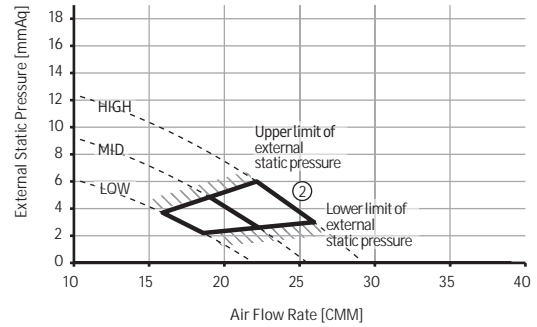


③	External Static Pressure(mmAq)	Option Code
	$6 < SP \leq 9$	010054-1C5935-204747-331201

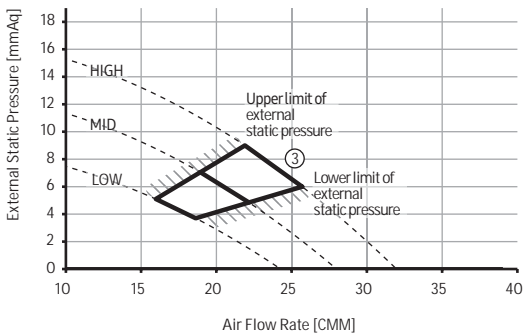

④	External Static Pressure(mmAq)	Option Code
	$9 < SP \leq 12$	010054-1C5989-204747-331201

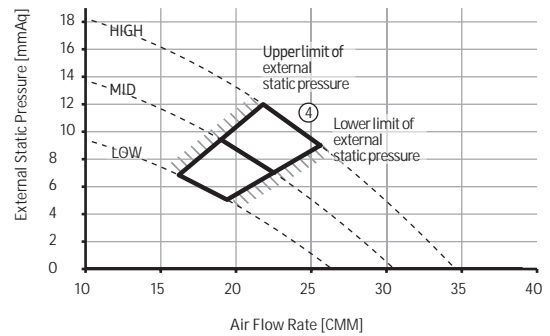

⑤	External Static Pressure(mmAq)	Option Code
	$12 < SP \leq 15$	010054-1C59DF-204747-331201

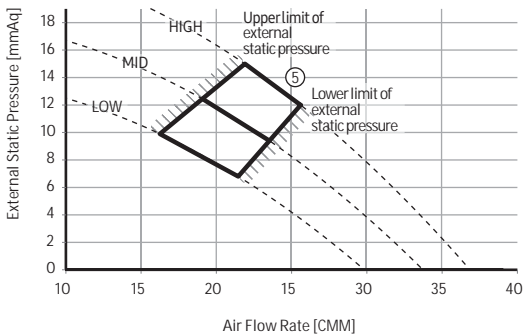

### Note

Adjust option code according to the actual installation condition (external static pressure).


ESP = External Static Pressure

The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.


# 8. Fan Characteristics

## 5) AM090HNMPKH/EU


①	External Static Pressure(mmAq)	Option Code
	0 ≤ SP ≤ 4	010054-1C546D-205A5A-331212

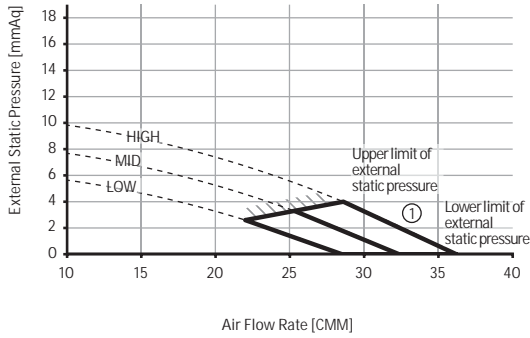


②	External Static Pressure(mmAq)	Option Code
	4 < SP ≤ 8	010054-1C55E3-205A5A-331212

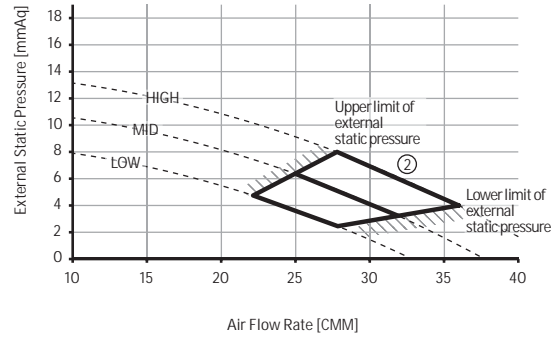

③	External Static Pressure(mmAq)	Option Code
	8 < SP ≤ 12	010054-1C5969-205A5A-331212

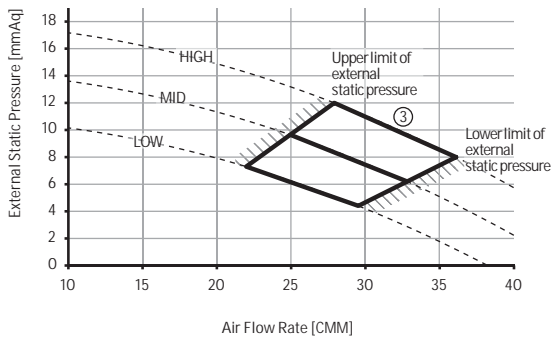


④	External Static Pressure(mmAq)	Option Code
	12 < SP ≤ 15	010054-1C59CD-205A5A-331212

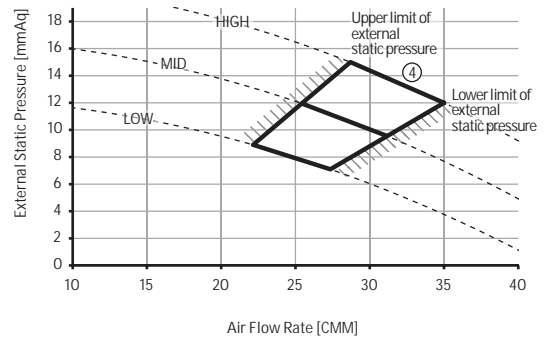


## 6) AM112HNHPKH/EU

①	External Static Pressure(mmAq)	Option Code
	3 ≤ SP ≤ 6.2	010054-1C5446-207070-331226

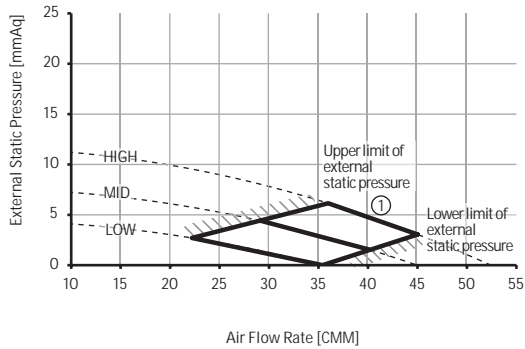

②	External Static Pressure(mmAq)	Option Code
	6.2 < SP ≤ 9	010054-1C54A7-207070-331226

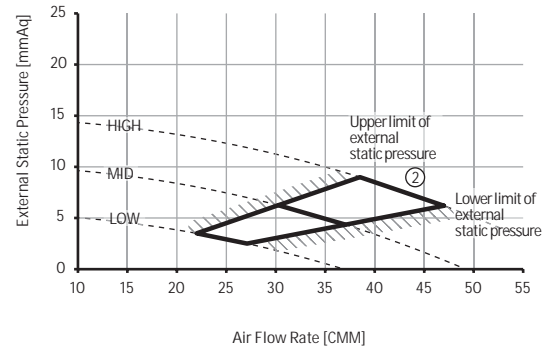

### Note

Adjust option code according to the actual installation condition (external static pressure).


ESP = External Static Pressure

The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.


# 8. Fan Characteristics

## 6) AM112HNHPKH/EU


③	External Static Pressure(mmAq)	Option Code
	9 < SP≤11	010054-1C54C9-207070-331226

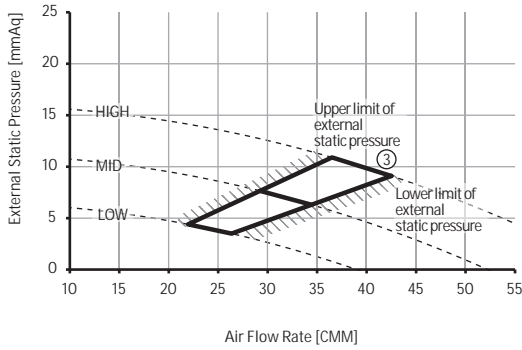


④	External Static Pressure(mmAq)	Option Code
	11 < SP≤13	010054-1C580B-207070-331226

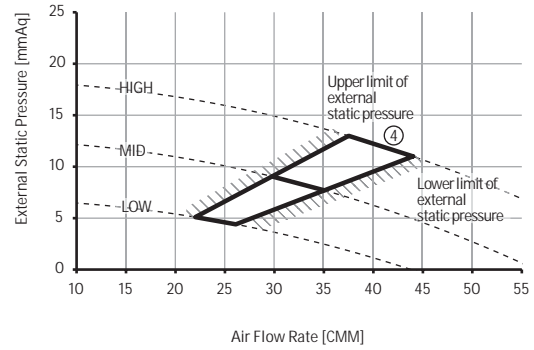


⑤	External Static Pressure(mmAq)	Option Code
	13 < SP≤15	010054-1C584D-207070-331226

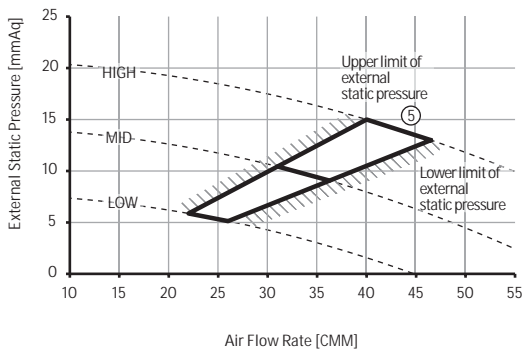


⑥	External Static Pressure(mmAq)	Option Code
	15 < SP≤17	010054-1C587F-207070-331226

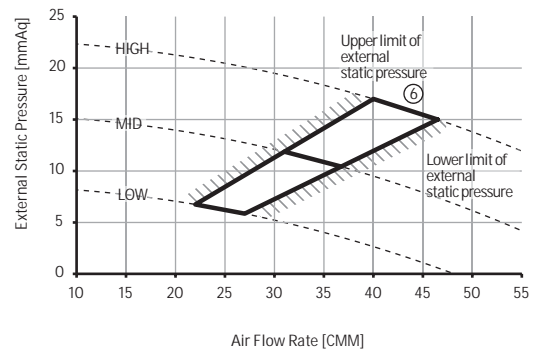

⑦	External Static Pressure(mmAq)	Option Code
	17 < SP≤19	010054-1C59A1-207070-331226

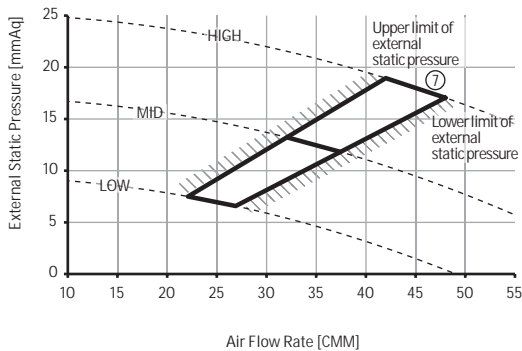

⑧	External Static Pressure(mmAq)	Option Code
	19 < SP≤20	010054-1C59B2-207070-331226

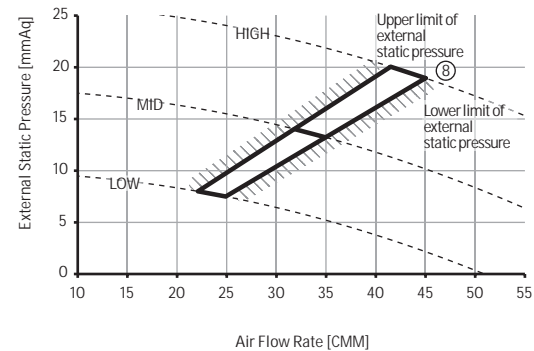

### Note

Adjust option code according to the actual installation condition (external static pressure).

ESP = External Static Pressure


The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.




# 8. Fan Characteristics

## 7) AM112HNMPKH/EU


①	External Static Pressure(mmAq)	Option Code
	0 ≤ SP ≤ 5.2	010054-1C5412-207070-331223

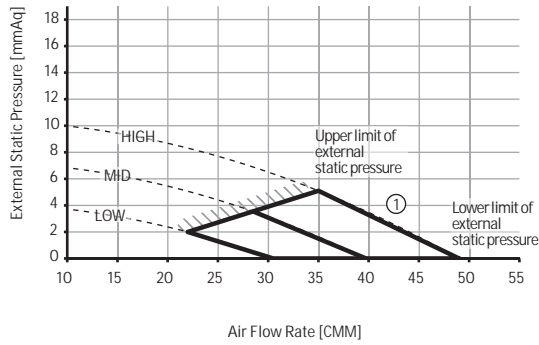


②	External Static Pressure(mmAq)	Option Code
	5.2 < SP ≤ 8	010054-1C5466-207070-331223

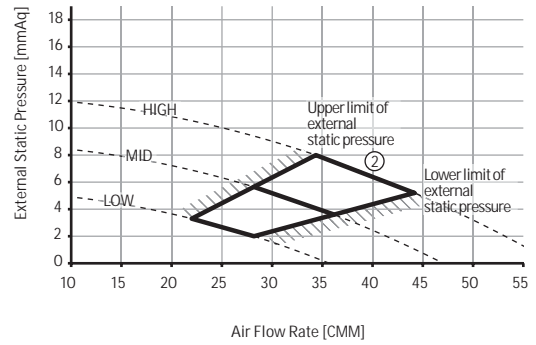

③	External Static Pressure(mmAq)	Option Code
	8 < SP ≤ 12	010054-1C54EA-207070-331223

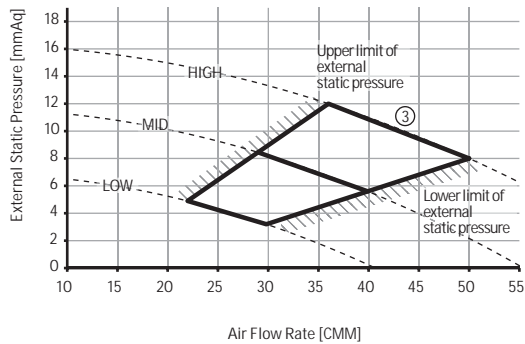

④	External Static Pressure(mmAq)	Option Code
	12 < SP ≤ 15	010054-1C583E-207070-331223

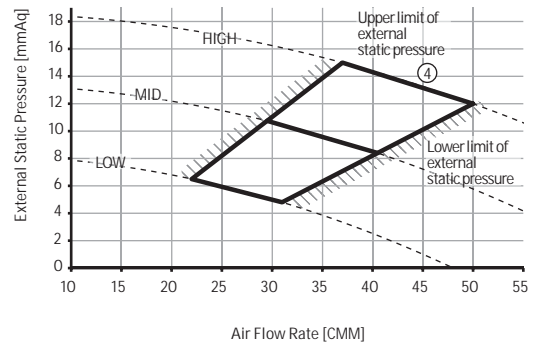

### Note

Adjust option code according to the actual installation condition (external static pressure).


ESP = External Static Pressure

The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.


# 8. Fan Characteristics

## 8) AM128HNHPKH/EU


①	External Static Pressure(mmAq)	Option Code
	3≤SP≤6.2	010054-1C5466-208080-331225

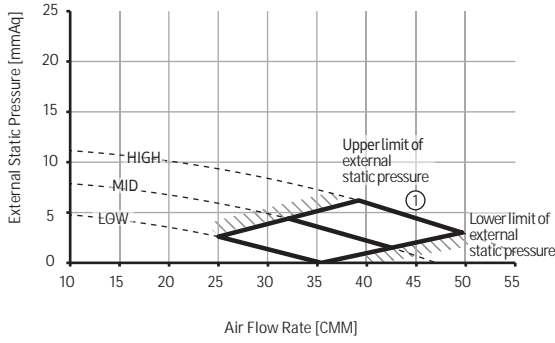


②	External Static Pressure(mmAq)	Option Code
	6.2 < SP ≤ 9	010054-1C54B9-208080-331225

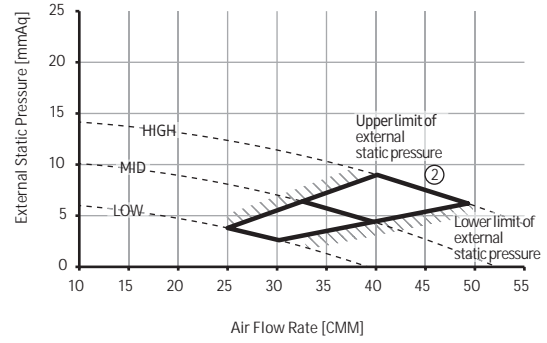


③	External Static Pressure(mmAq)	Option Code
	9 < SP ≤ 11	010054-1C54EC-208080-331225

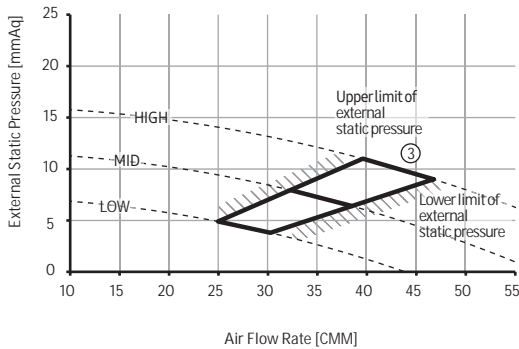


④	External Static Pressure(mmAq)	Option Code
	11 < SP ≤ 13	010054-1C581E-208080-331225

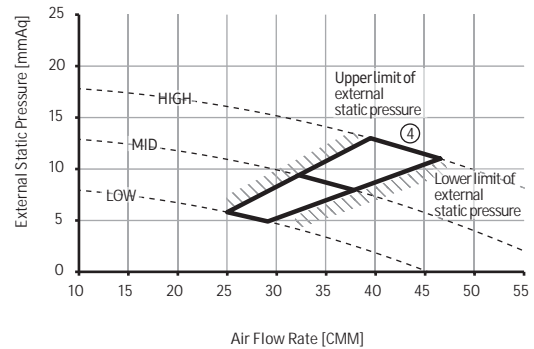

⑤	External Static Pressure(mmAq)	Option Code
	13 < SP ≤ 15	010054-1C5940-208080-331225

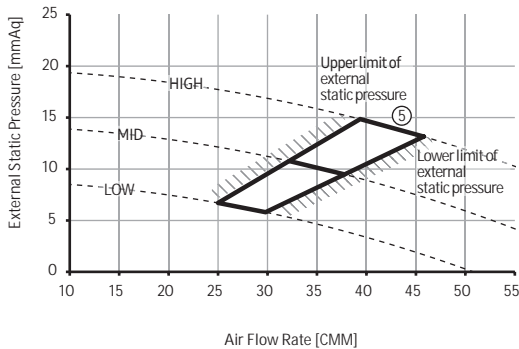

⑥	External Static Pressure(mmAq)	Option Code
	15 < SP ≤ 17	010054-1C5982-208080-331225

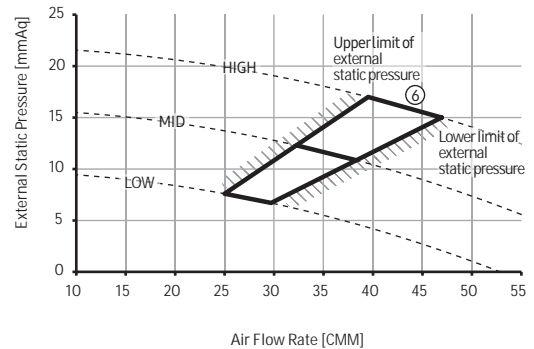

### Note

Adjust option code according to the actual installation condition (external static pressure).


ESP = External Static Pressure

The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.


# 8. Fan Characteristics

## 8) AM128HNHPKH/EU

⑦	External Static Pressure(mmAq)	Option Code
	17 < SP ≤ 19	010054-1C59B3-208080-331225

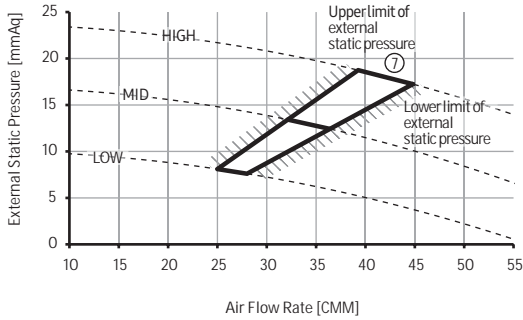


⑧	External Static Pressure(mmAq)	Option Code
	19 < SP ≤ 20	010054-1C59C4-208080-331225

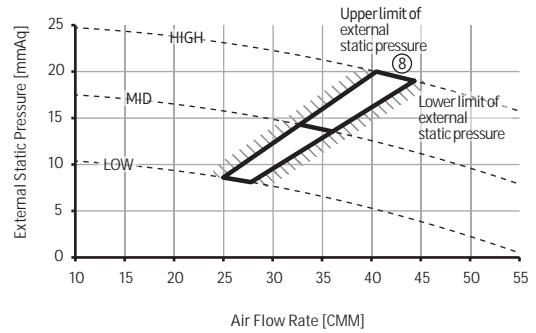


## 9) AM128HNMPKH/EU


①	External Static Pressure(mmAq)	Option Code
	0 ≤ SP ≤ 5.2	010054-1C5426-208080-331222

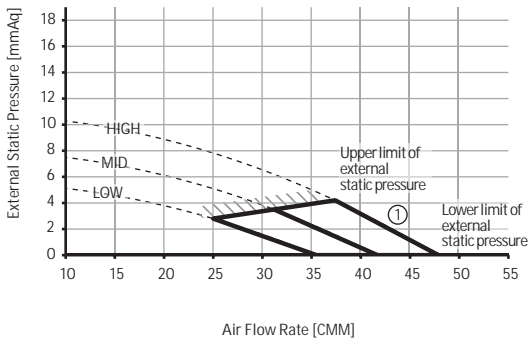


②	External Static Pressure(mmAq)	Option Code
	5.2 < SP ≤ 8	010054-1C5478-208080-331222

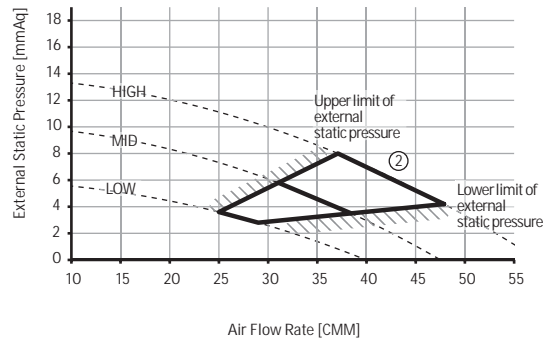

③	External Static Pressure(mmAq)	Option Code
	8 < SP ≤ 12	010054-1C54EE-208080-331222

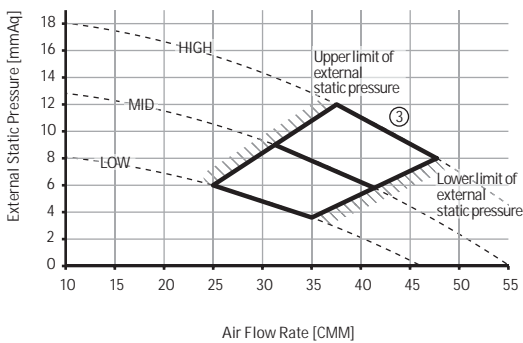

④	External Static Pressure(mmAq)	Option Code
	12 < SP ≤ 15	010054-1C5920-208080-331222

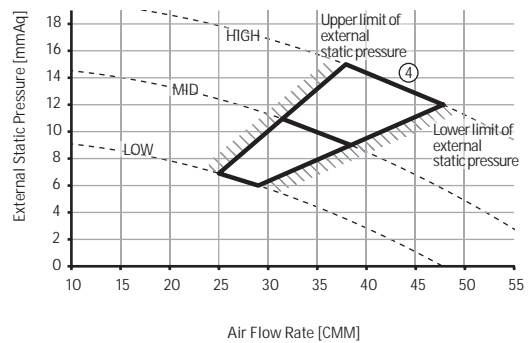

### Note

Adjust option code according to the actual installation condition (external static pressure).


ESP = External Static Pressure

The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.


# 8. Fan Characteristics

## 10) AM140HNHPKH/EU


①	External Static Pressure(mmAq)	Option Code
	3 ≤ SP ≤ 6.2	010054-1C5486-208C8C-331224

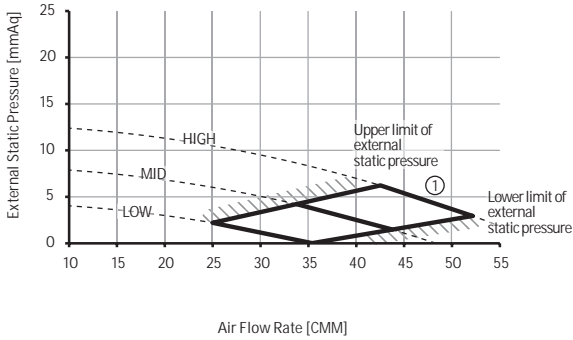


②	External Static Pressure(mmAq)	Option Code
	6.2 < SP ≤ 9	010054-1C54D7-208C8C-331224

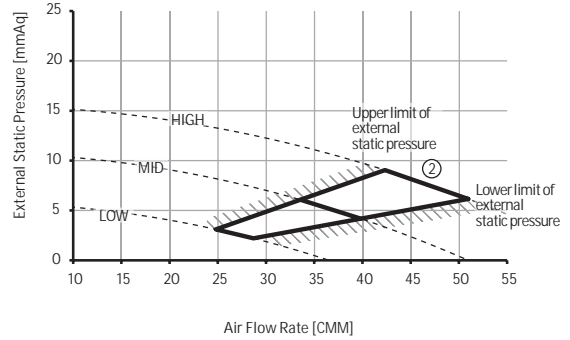


③	External Static Pressure(mmAq)	Option Code
	9 < SP ≤ 11	010054-1C5809-208C8C-331224

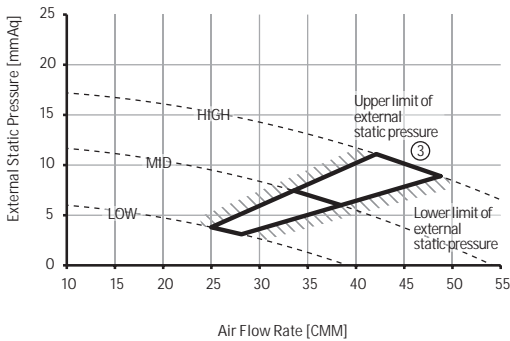


④	External Static Pressure(mmAq)	Option Code
	11 < SP ≤ 13	010054-1C583B-208C8C-331224

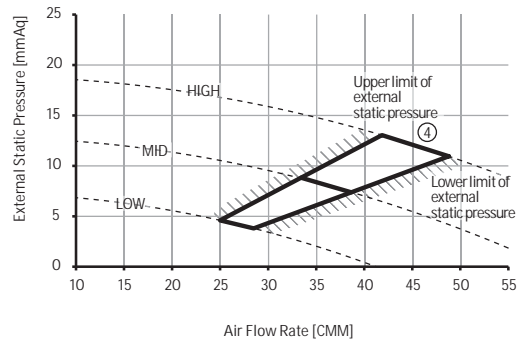

⑤	External Static Pressure(mmAq)	Option Code
	13 < SP ≤ 15	010054-1C586D-208C8C-331224

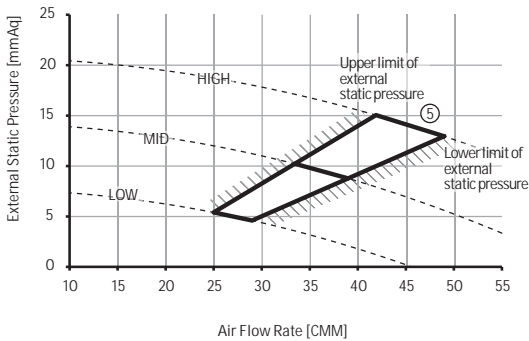

⑥	External Static Pressure(mmAq)	Option Code
	15 < SP ≤ 17	010054-1C588F-208C8C-331224

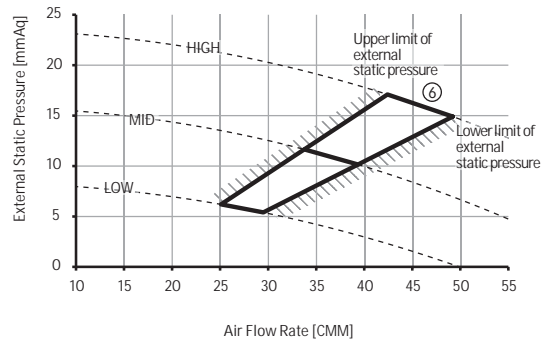

### Note

Adjust option code according to the actual installation condition (external static pressure).


ESP = External Static Pressure

The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.


# 8. Fan Characteristics

## 10) AM140HNHPKH/EU

⑦	External Static Pressure(mmAq)	Option Code
	17 < SP ≤ 19	010054-1C59C0-208C8C-331224

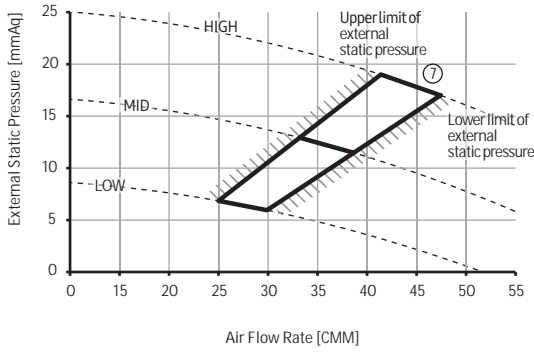


⑧	External Static Pressure(mmAq)	Option Code
	19 < SP ≤ 20	010054-1C59D1-208C8C-331224

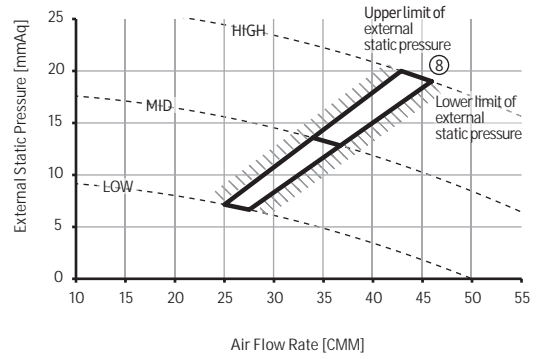


## 11) AM140HNMPKH/EU


①	External Static Pressure(mmAq)	Option Code
	0 ≤ SP ≤ 5.2	010054-1C5444-208C8C-331221

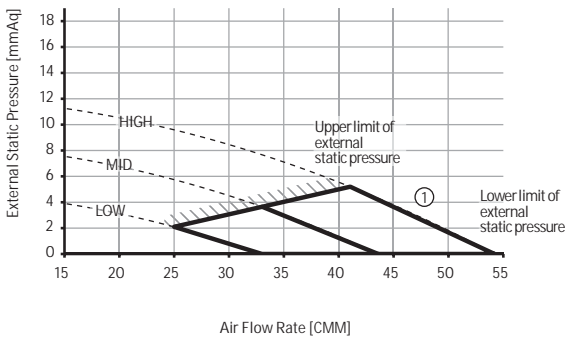


②	External Static Pressure(mmAq)	Option Code
	5.2 < SP ≤ 8	010054-1C5498-208C8C-331221

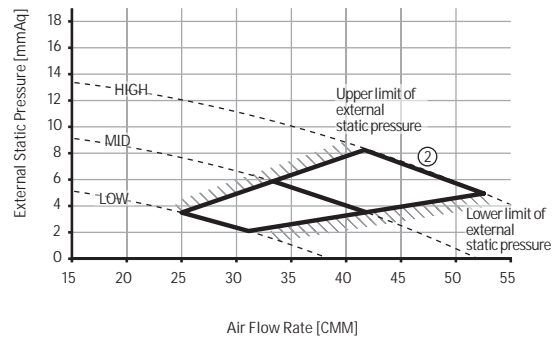

③	External Static Pressure(mmAq)	Option Code
	8 < SP ≤ 12	010054-1C54FA-208C8C-331221

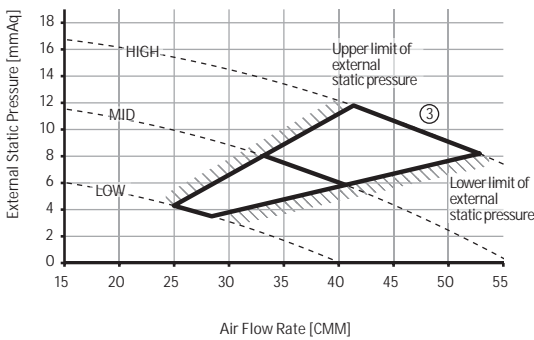

④	External Static Pressure(mmAq)	Option Code
	12 < SP ≤ 15	010054-1C583E-208C8C-331221

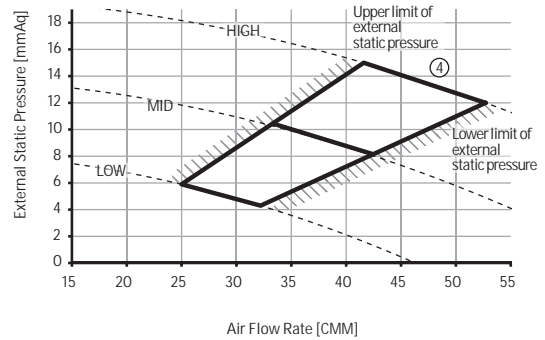

### Note


Adjust option code according to the actual installation condition (external static pressure).

ESP = External Static Pressure

The graphs display the available external static pressure range of installed indoor units. Therefore, they do not reflect the actual change of external static pressure and airflow rate according to adjusted airflow (High-Mid-Low) of installed indoor units.

# 9. Piping Diagram

## Duct S

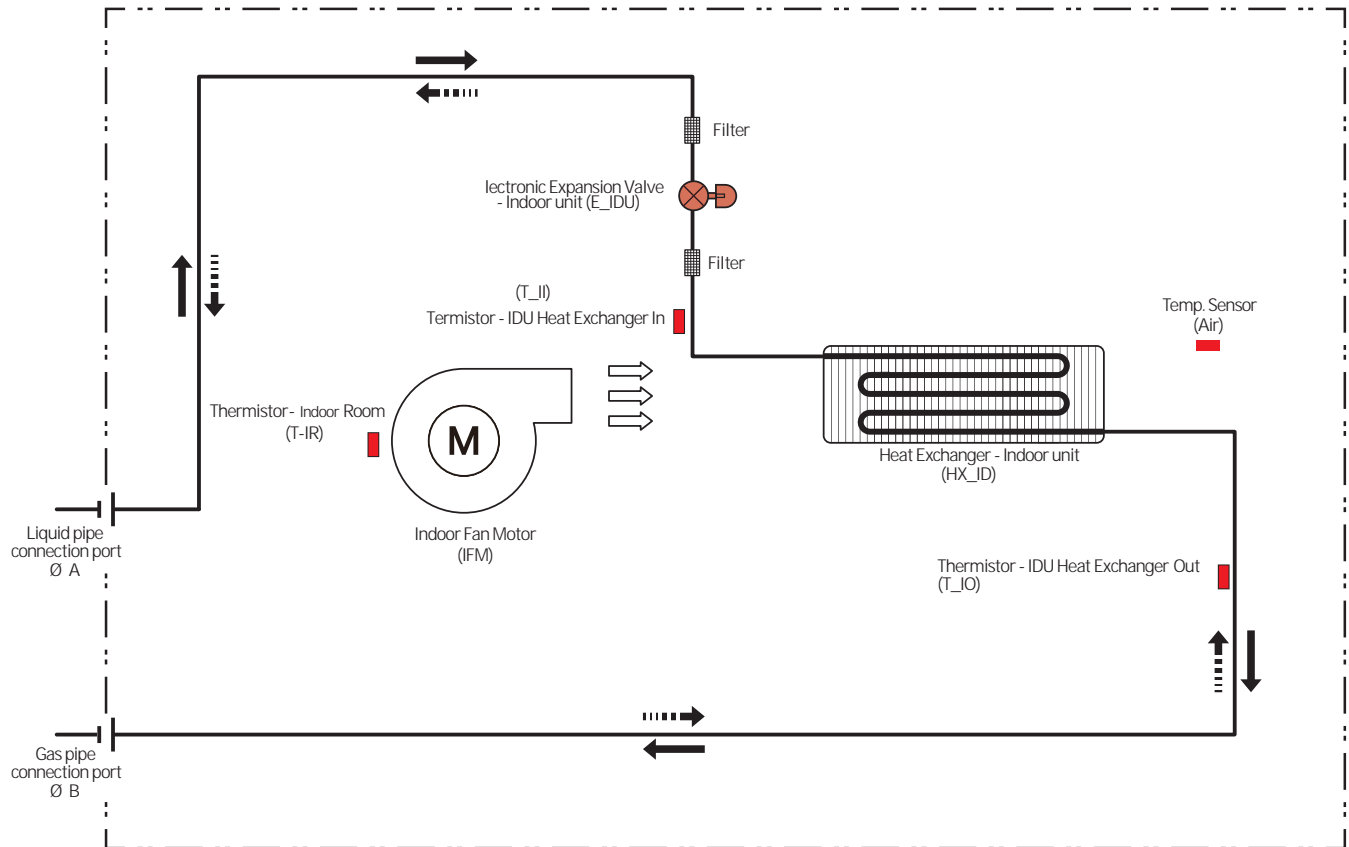

Refrigerant flow	
Cooling	Heating
→	- - - - - →

MODEL	A	B
AM036HNMPKH***	6.35	12.7
AM045HNMPKH***		
AM056HNMPKH***		
AM071HNMPKH***	9.52	15.88
AM090HNMPKH***		
AM112HN*PKH***		
AM128HN*PKH***		
AM140HN*PKH***		