

Specifications

Boracay Wall-Mounted (EEV excluded)

- Motorised louvre provides an automatic change in airflow by directing the air up and down.
- Manual adjustable guide vane allows users to change the airflow from side to side (left to right).
- Turbo function provides fast and powerful cooling.
- Cross-flow fan direct driven by a single motor.
- Washable Full HD 80 filter.
- Four-direction drain and refrigerant piping connection as standard.



Model				AM015KNTDEH/EU	AM022KNTDEH/EU	AM028KNTDEH/EU
Power Supply			Φ, #, V, Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz
Performance		Cooling	kW	1.5	2.2	2.8
		Heating		1.7	2.5	3.2
Power	Power Input (Nominal)	Cooling	W	32.0	32.0	38.0
		Heating		34.0	35.0	39.0
	Current Input (Nominal)	Cooling	A	0.20	0.20	0.22
		Heating		0.20	0.20	0.22
	MCA			0.3	0.3	0.4
	MFA			15.0	15.0	15.0
Fan	Type	-		Crossflow Fan	Crossflow Fan	Crossflow Fan
	Number of Fans	-		1	1	1
	Airflow Rate	H/M/L (UL)	m³/min	6.2/5.7/5.1	6.6/5.7/5.1	7.0/6.2/5.5
			l/s	103.3/95.0/85.0	110.0/95.0/85.0	116.7/103.3/91.7
Fan motor	Type	-		SSR Feedback	SSR Feedback	SSR Feedback
	Output x n		W	19 x 1	19 x 1	19 x 1
Piping Connections	Liquid Pipe		ø, mm	6.35	6.35	6.35
			ø, inch	1/4	1/4	1/4
	Gas Pipe		ø, mm	12.7	12.7	12.7
			ø, inch	1/2	1/2	1/2
	Drain Pipe		ø, mm	ID 18 HOSE	ID 18 HOSE	ID 18 HOSE
Field Wiring	Power Source Wire	Minimum	mm²	1.5	1.5	1.5
	For connection with indoor	Minimum	mm²	0.75	0.75	0.75
		Remark	-	F1, F2	F1, F2	F1, F2
Refrigerant	Type	-		R410A(Fluorinated greenhouse gas, GWP=2,088)		
	Control Method	-		EEV NOT INCLUDED	EEV NOT INCLUDED	EEV NOT INCLUDED
Sound ²	Sound Pressure	H/M/L	dB(A)	30/28/25	31/28/25	31/29/26
	Sound Power	Cooling		47	48	48
Dimensions	Net Weight		kg	8.0	8.0	8.5
	Net Dimensions (W × H × D)		mm	820 x 285 x 227	820 x 285 x 227	820 x 285 x 227

Accessories



Wireless Remote Controller	Touch Controller	Wired Remote Controller	Wired Remote Controller	Wi-Fi Kit	External Room Sensor	EEV Kit 1 Indoor	EEV Kit 2 Indoor	EEV Kit 3 Indoor
AR-EH03E	MWR-SH11N	MWR-WET3N	MWR-WG00*N	MIM-H04EN	MRW-TA	MEV-***SA	MXD-E24/32K***A	MXD-E24/32K***A




AM036KNTDEH/EU	AM045KNTDEH/EU	AM056KNTDEH/EU	AM071KNTDEH/EU
1Ø, 2, 220–240 V, 50 Hz	1Ø, 2, 220–240 V, 50 Hz	1Ø, 2, 220–240 V, 50 Hz	1Ø, 2, 220–240 V, 50 Hz
3.6	4.5	5.6	6.8
4.0	5.0	6.3	7.0
42.0	47.0	48.0	51.0
42.0	47.0	48.0	53.0
0.23	0.27	0.27	0.28
0.23	0.27	0.27	0.28
0.4	0.4	0.4	0.4
15.0	15.0	15.0	15.0
Crossflow Fan	Crossflow Fan	Crossflow Fan	Crossflow Fan
1	1	1	1
8.5/7.5/6.6	13.9/12.4/11.2	14.4/12.9/11.2	15.7/14.1/12.9
141.7/125.0/110.0	231.7/206.7/186.7	240.0/215.0/186.7	261.7/235.0/215.0
SSR Feedback	SSR Feedback	SSR Feedback	SSR Feedback
19 x 1	28 x 1	28 x 1	28 x 1
6.35	6.35	6.35	9.52
1/4	1/4	1/4	3/8
12.7	6.35	6.35	9.52
1/2	1/2	1/2	5/8
ID 18 HOSE	ID 18 HOSE	ID 18 HOSE	ID 18 HOSE
1.5	1.5	1.5	1.5
0.75	0.75	0.75	0.75
F1, F2	F1, F2	F1, F2	F1, F2
R410A(Fluorinated greenhouse gas, GWP=2,088)			
EEV NOT INCLUDED	EEV NOT INCLUDED	EEV NOT INCLUDED	EEV NOT INCLUDED
36/33/29	38/35/33	39/36/33	40/38/35
51	53	53	55
8.5	12.0	12.0	12.0
820 x 285 x 227	1,065 x 298 x 243	1,065 x 298 x 243	1,065 x 298 x 243


Dimensional drawings

Boracay Wall-Mounted (EEV excluded)

AM015/022/028/036KNTD****

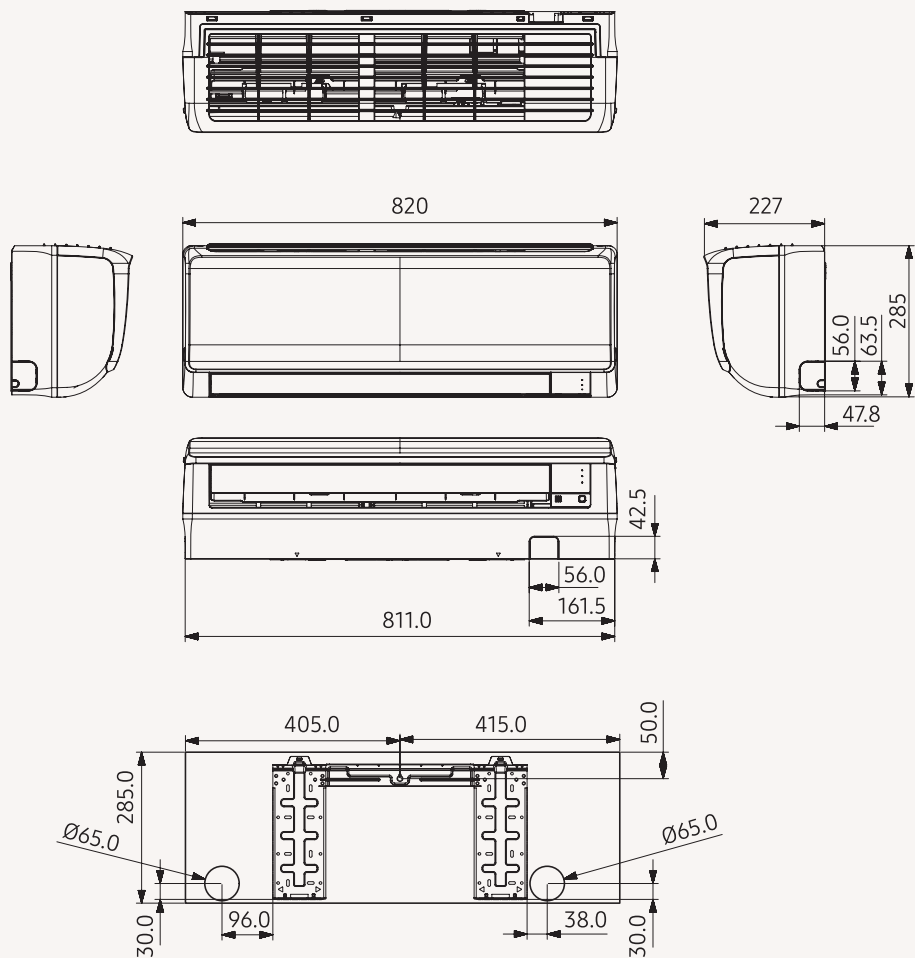

NO	Name	Description
1	Liquid pipe connection	ø6.35 (1/4)
2	Gas pipe connection	ø12.70 (1/2)
3	Drain pipe connection	ID 18 HOSE
4	Power supply/communication wiring conduits	-

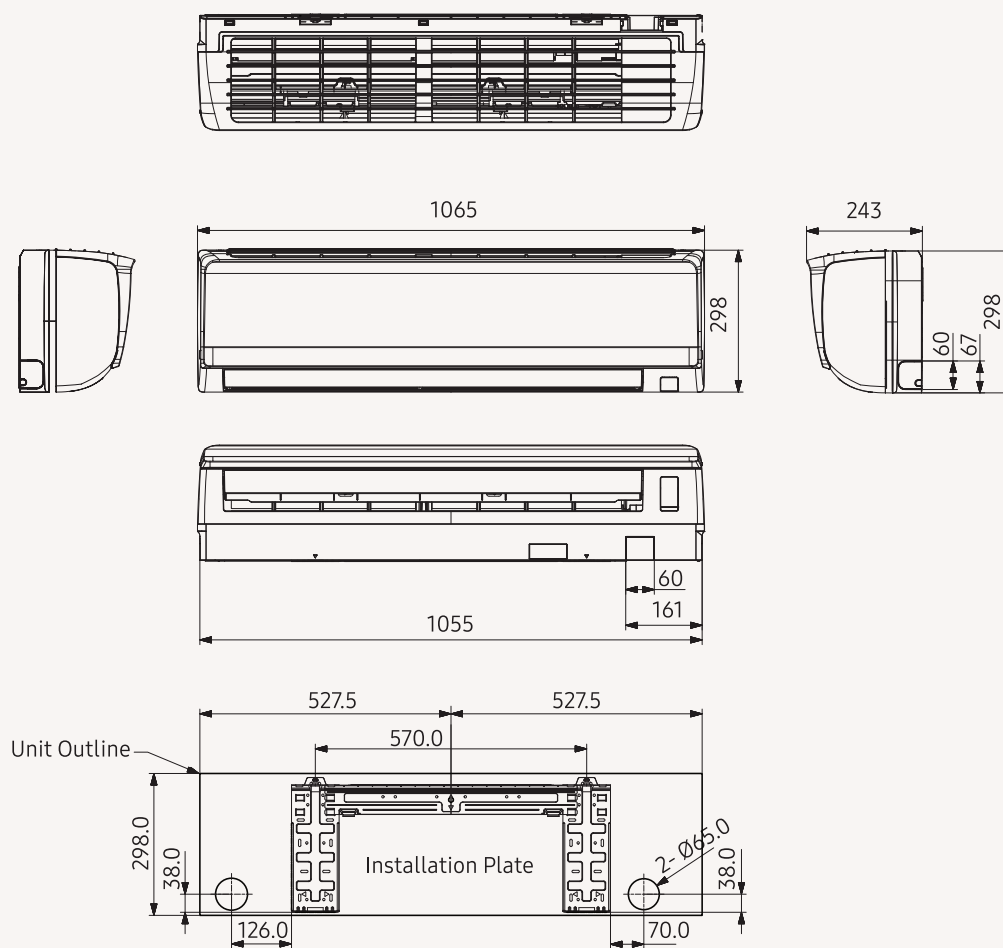

NO	Name	Description
1	Liquid pipe connection	ø6.35 (1/4)
2	Gas pipe connection	ø12.70 (1/2)
3	Drain pipe connection	ID 18 HOSE
4	Power supply/communication wiring conduits	-

Specifications

Boracay Wall-Mounted (EEV included)

- Motorised louvre provides an automatic change in airflow by directing the air up and down.
- Manual adjustable guide vane allows users to change the airflow from side to side (left to right).
- Turbo function provides fast and powerful cooling.
- Cross-flow fan direct driven by a single motor.
- Washable Full HD 80 filter.
- Four-direction drain and refrigerant piping connection as standard.



Model				AM015KNQDEH/EU	AM022KNQDEH/EU	AM028KNQDEH/EU
Power Supply		Φ, #, V, Hz		1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz
Performance		Cooling	kW	1.5	2.2	2.8
		Heating	kW	1.7	2.5	3.2
Power	Power Input (Nominal)	Cooling	W	32.0	32.0	38.0
		Heating		34.0	35.0	39.0
	Current Input (Nominal)	Cooling	A	0.20	0.20	0.22
		Heating		0.20	0.20	0.22
	MCA			0.3	0.3	0.4
	MFA			15.0	15.0	15.0
Fan	Type	-		Crossflow Fan	Crossflow Fan	Crossflow Fan
	Number of Fans	-		1	1	1
	Airflow Rate	H/M/L (UL)	m³/min	6.2/5.7/5.1	6.6/5.7/5.1	7.0/6.2/5.5
Fan motor			l/s	103.3/95.0/85.0	110.0/95.0/85.0	116.7/103.3/91.7
	Type	-		SSR Feedback	SSR Feedback	SSR Feedback
Piping Connections	Output x n		W	19 x 1	19 x 1	19 x 1
	Liquid Pipe		ø, mm	6.35	6.35	6.35
			ø, inch	1/4	1/4	1/4
	Gas Pipe		ø, mm	12.7	12.7	12.7
			ø, inch	1/2	1/2	1/2
	Drain Pipe		ø, mm	ID 18 HOSE	ID 18 HOSE	ID 18 HOSE
	Heat Insulation	-		Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes
Field Wiring	Power Source Wire	Minimum	mm²	1.5	1.5	1.5
	For connection with indoor	Minimum	mm²	0.75	0.75	0.75
		Remark	-	F1, F2	F1, F2	F1, F2
Refrigerant	Type	-		R410A(Fluorinated greenhouse gas, GWP=2,088)		
	Control Method	-		EEV INCLUDED	EEV INCLUDED	EEV INCLUDED
Sound ²	Sound Pressure	H/M/L	dB(A)	30/28/25	31/28/25	31/29/26
	Sound Power	Cooling		47	48	48
Dimensions	Net Weight		kg	8.5	8.5	9.0
	Net Dimensions (W × H × D)		mm	820 x 285 x 227	820 x 285 x 227	820 x 285 x 227

Accessories



Wireless Remote Controller	Touch Controller	Wired Remote Controller	Wired Remote Controller	Wi-Fi Kit	External Room Sensor
AR-EH03E	MWR-SH11N	MWR-WE13N	MWR-WG00*N	MIM-H04EN	MRW-TA




AM036KNQDEH/EU	AM045KNQDEH/EU	AM056KNQDEH/EU	AM071KNQDEH/EU
1Φ, 2, 220–240 V, 50 Hz	1Φ, 2, 220–240 V, 50 Hz	1Φ, 2, 220–240 V, 50 Hz	1Φ, 2, 220–240 V, 50 Hz
3.6	4.5	5.6	6.8
4.0	5.0	6.3	7.0
42.0	47.0	48.0	51.0
42.0	47.0	48.0	53.0
0.23	0.27	0.27	0.28
0.23	0.27	0.27	0.28
0.4	0.4	0.4	0.4
15.0	15.0	15.0	15.0
Crossflow Fan	Crossflow Fan	Crossflow Fan	Crossflow Fan
1	1	1	1
8.5/7.5/6.6	13.9/12.4/11.2	14.4/12.9/11.2	15.7/14.1/12.9
141.7/125.0/110.0	231.7/206.7/186.7	240.0/215.0/186.7	261.7/235.0/215.0
SSR Feedback	SSR Feedback	SSR Feedback	SSR Feedback
19 x 1	28 x 1	28 x 1	28 x 1
6.35	6.35	6.35	9.52
1/4	1/4	1/4	3/8
12.7	12.7	12.7	15.88
1/2	1/2	1/2	5/8
ID 18 HOSE	ID 18 HOSE	ID 18 HOSE	ID 18 HOSE
Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes
1.5	1.5	1.5	1.5
0.75	0.75	0.75	0.75
F1, F2	F1, F2	F1, F2	F1, F2
R410A(Fluorinated greenhouse gas, GWP=2,088)			
EEV INCLUDED	EEV INCLUDED	EEV INCLUDED	EEV INCLUDED
36/33/29	38/35/33	39/36/33	40/38/35
51	53	53	55
9.0	12.5	12.5	12.5
820 x 285 x 227	1,065 x 298 x 243	1,065 x 298 x 243	1,065 x 298 x 243


Dimensional drawings

Boracay Wall-Mounted (EEV included)

AM015/022/028/036KNQD****

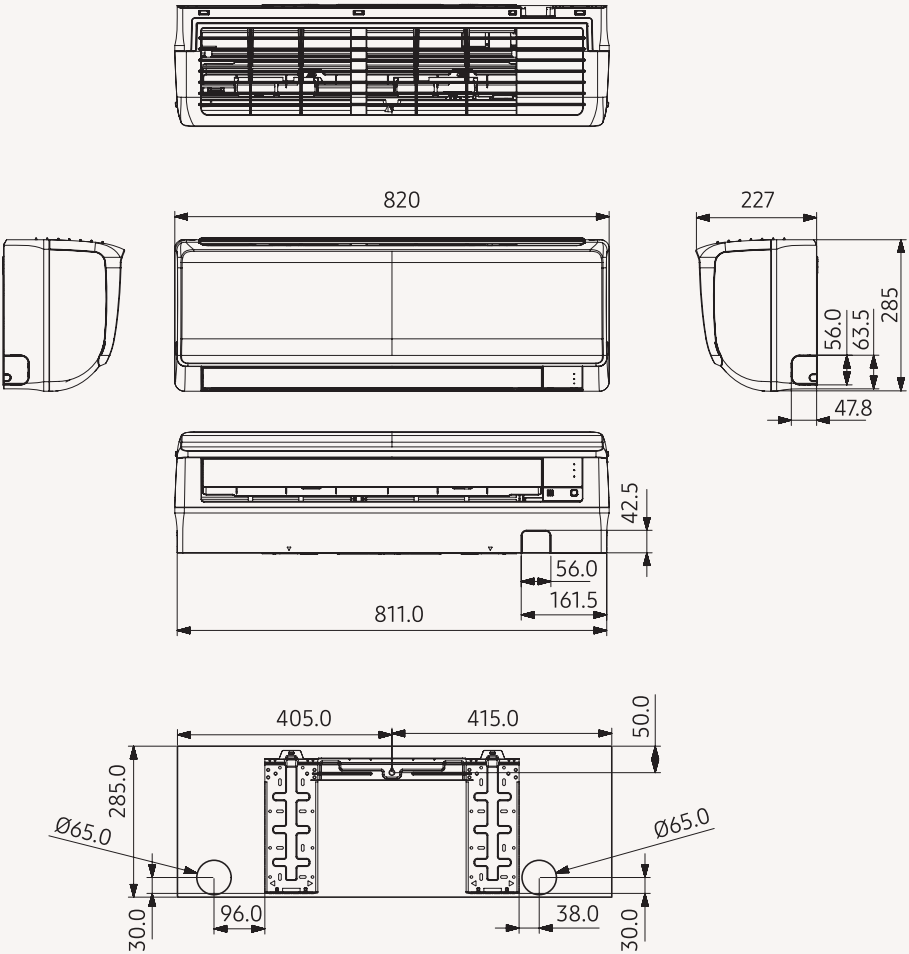

NO	Name	Description
1	Liquid pipe connection	ø6.35 (1/4)
2	Gas pipe connection	ø12.70 (1/2)
3	Drain pipe connection	ID 18 HOSE
4	Power supply/communication wiring conduits	-

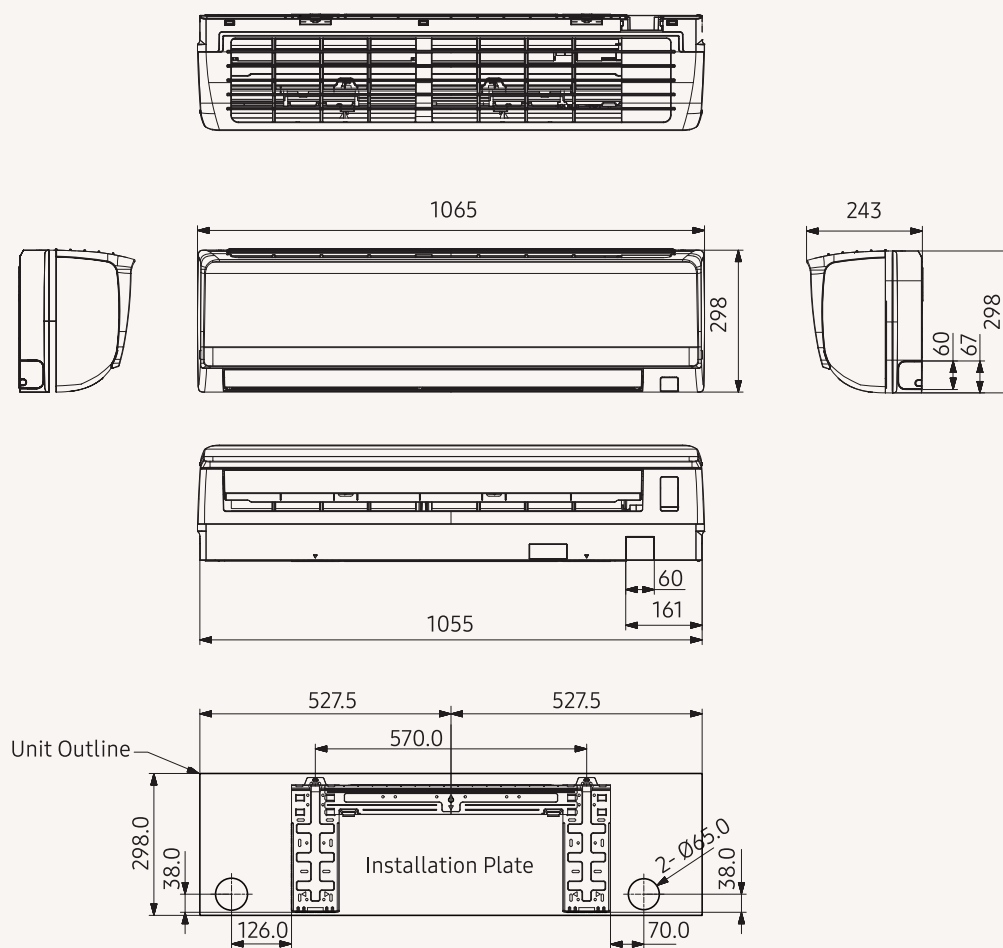

NO	Name	Description
1	Liquid pipe connection	ø6.35 (1/4)
2	Gas pipe connection	ø12.70 (1/2)
3	Drain pipe connection	ID 18 HOSE
4	Power supply/communication wiring conduits	-

BORACAY

- 1 *Specifications*
- 2 *Summary Table*
- 3 *Capacity Table*
- 4 *Dimensional Drawing*
- 5 *Center of Gravity*
- 6 *Electrical Wiring Diagram*
- 7 *Sound data*
- 8 *Temperature and Air Flow Distribution*
- 9 *Piping Diagram*

1. Specification

BORACAY

Type				WALL MOUNTED	WALL MOUNTED	WALL MOUNTED	WALL MOUNTED
Model CODE				AM015KNTDEH/EU	AM022KNTDEH/EU	AM028KNTDEH/EU	AM036KNTDEH/EU
Power Supply			Ø, #, V, Hz	1, 2, 220-240, 50	1, 2, 220-240, 50	1, 2, 220-240, 50	1,2,220-240,50
Mode			-	HEAT PUMP	HEAT PUMP	HEAT PUMP	HEAT PUMP
Performance	Capacity (Nominal)	Cooling	kW	1.5	2.2	2.8	3.6
			Btu/h	5,100	7,500	9,600	12,300
		Heating	kW	1.7	2.5	3.2	4.0
			Btu/h	5,800	8,500	10,900	13,600
Power	Power Input (Nominal)	Cooling	W	32.0	32.0	38.0	42.0
		Heating		34.0	35.0	39.0	42.0
	Current Input (Nominal)	Cooling	A	0.20	0.20	0.22	0.23
		Heating		0.20	0.20	0.22	0.23
	MCA			0.3	0.3	0.4	0.4
	MFA			15.0	15.0	15.0	15.0
Heat exchanger	Type		-	Fin & Tube	Fin & Tube	Fin & Tube	Fin & Tube
	Material	Fin	-	Al	Al	Al	Al
		Tube	-	Cu	Cu	Cu	Cu
	Fin Treatment		-	Anti-corrosion	Anti-corrosion	Anti-corrosion	Anti-corrosion
Fan	Type		-	Crossflow Fan	Crossflow Fan	Crossflow Fan	Crossflow Fan
	Quantity		ea	1	1	1	1
	Air Flow Rate	H/M/L (UL)	CMM	6.2/5.7/5.1	6.6/5.7/5.1	7.0/6.2/5.5	8.5/7.5/6.6
			l/s	103.3/95.0/85.0	110.0/95.0/85.0	116.7/103.3/91.7	141.7/125.0/110.0
	External Pressure	Min/Std/Max	mmAq	-	-	-	-
			Pa	-	-	-	-
Fan motor	Type		-	SSR Feedback	SSR Feedback	SSR Feedback	SSR Feedback
	Output x n		-	19W x 1	19W x 1	19W x 1	19W x 1
Piping Connections	Liquid Pipe		Type	Flare connection	Flare connection	Flare connection	Flare connection
			Ø, mm	6.35	6.35	6.35	6.35
			Ø, inch	1/4"	1/4"	1/4"	1/4"
	Gas Pipe		Type	Flare connection	Flare connection	Flare connection	Flare connection
			Ø, mm	12.7	12.7	12.7	12.7
			Ø, inch	1/2"	1/2"	1/2"	1/2"
	Drain Pipe		Ø, mm	ID 18 HOSE	ID 18 HOSE	ID 18 HOSE	ID 18 HOSE
Heat insulation		-	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes	
Field Wiring	Power Source Wire	Minimum	mm2	1.5	1.5	1.5	1.5
	For connection with indoor	Minimum	mm2	0.75	0.75	0.75	0.75
		Remark	-	F1, F2	F1, F2	F1, F2	F1, F2
Refrigerant	Type		-	R410A	R410A	R410A	R410A
	Control Method		-	EEV NOT INCLUDED	EEV NOT INCLUDED	EEV NOT INCLUDED	EEV NOT INCLUDED
Sound	Sound Pressure	High/Mid/Low	dB(A)	30/28/25	31/28/25	31/29/26	36/33/29
	Sound Power	Cooling		47	48	48	51
Dimensions	Net Weight		kg	8.0	8.0	8.5	8.5
	Shipping Weight		kg	9.7	9.7	10.2	10.2
	Net Dimensions (W×H×D)		mm	820 x 285 x 227	820 x 285 x 227	820 x 285 x 227	820 x 285 x 227
	Shipping Dimensions (W×H×D)		mm	880 x 280 x 363	880 x 280 x 363	880 x 280 x 363	880 x 280 x 363

NOTE

- Mode : HP(Heat Pump), HR(Heat Recovery)
- Nominal Cooling : Indoor temperature 27°CDB / 19°CWB, Outdoor temperature 35°CDB / 24°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Nominal Heating : Indoor temperature 20°CDB / 15°CWB, Outdoor temperature 7°CDB / 6°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
- These products contain R410A which is fluorinated greenhouse gas.
- Specifications may be subject to change without prior notice.
- Select wire size based on the value of MCA

1. Specification

BORACAY

Type				WALL MOUNTED	WALL MOUNTED	WALL MOUNTED
Model CODE				AM045KNTDEH/EU	AM056KNTDEH/EU	AM071KNTDEH/EU
Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	1,2,220-240,50
Mode			-	HEAT PUMP	HEAT PUMP	HEAT PUMP
Performance	Capacity (Nominal)	Cooling	kW	4.5	5.6	6.8
			Btu/h	15,400	19,100	23,200
		Heating	kW	5.0	6.3	7.0
			Btu/h	17,100	21,500	23,900
Power	Power Input (Nominal)	Cooling	W	47.0	48.0	51.0
		Heating		47.0	48.0	53.0
	Current Input (Nominal)	Cooling	A	0.27	0.27	0.28
		Heating		0.27	0.27	0.28
	MCA			0.4	0.4	0.4
	MFA			15.0	15.0	15.0
Heat exchanger	Type		-	Fin & Tube	Fin & Tube	Fin & Tube
	Material	Fin	-	Al	Al	Al
		Tube	-	Cu	Cu	Cu
	Fin Treatment		-	Anti-corrosion	Anti-corrosion	Anti-corrosion
Fan	Type		-	Crossflow Fan	Crossflow Fan	Crossflow Fan
	Quantity		ea	1	1	1
	Air Flow Rate	H/M/L (UL)	CMM	13.9/12.4/11.2	14.4/12.9/11.2	15.7/14.1/12.9
			l/s	231.7/206.7/186.7	240.0/215.0/186.7	261.7/235.0/215.0
	External Pressure	Min/Std/Max	mmAq	-	-	-
			Pa	-	-	-
Fan motor	Type		-	SSR Feedback	SSR Feedback	SSR Feedback
	Output x n		-	28W x 1	28W x 1	28W x 1
Piping Connections	Liquid Pipe		Type	Flare connection	Flare connection	Flare connection
			Ø, mm	6.35	6.35	9.52
			Ø, inch	1/4"	1/4"	3/8"
	Gas Pipe		Type	Flare connection	Flare connection	Flare connection
			Ø, mm	12.7	12.7	15.88
			Ø, inch	1/2"	1/2"	5/8"
	Drain Pipe		Ø, mm	ID 18 HOSE	ID 18 HOSE	ID 18 HOSE
Heat insulation		-	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes	
Field Wiring	Power Source Wire	Minimum	mm2	1.5	1.5	1.5
	For connection with indoor	Minimum	mm2	0.75	0.75	0.75
		Remark	-	F1, F2	F1, F2	F1, F2
Refrigerant	Type		-	R410A	R410A	R410A
	Control Method		-	EEV NOT INCLUDED	EEV NOT INCLUDED	EEV NOT INCLUDED
Sound	Sound Pressure	High/Mid/Low	dB(A)	38/35/33	39/36/33	40/38/35
	Sound Power	Cooling		53	53	55
Dimensions	Net Weight		kg	12.0	12.0	12.0
	Shipping Weight		kg	14.0	14.0	14.0
	Net Dimensions (W×H×D)		mm	1065 x 298 x 243	1065 x 298 x 243	1065 x 298 x 243
	Shipping Dimensions (W×H×D)		mm	1128 x 299 x 378	1128 x 299 x 378	1128 x 299 x 378

NOTE

- Mode : HP(Heat Pump), HR(Heat Recovery)
- Nominal Cooling : Indoor temperature 27°CDB / 19°CWB, Outdoor temperature 35°CDB / 24°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Nominal Heating : Indoor temperature 20°CDB / 15°CWB, Outdoor temperature 7°CDB / 6°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
- These products contain R410A which is fluorinated greenhouse gas.
- Specifications may be subject to change without prior notice.
- Select wire size based on the value of MCA

1. Specification

BORACAY

Type				WALL MOUNTED	WALL MOUNTED	WALL MOUNTED	WALL MOUNTED
Model CODE				AM015KNQDEH/EU	AM022KNQDEH/EU	AM028KNQDEH/EU	AM036KNQDEH/EU
Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	1,2,220-240,50	1,2,220-240,50
Mode			-	HEAT PUMP	HEAT PUMP	HEAT PUMP	HEAT PUMP
Performance	Capacity (Nominal)	Cooling	kW	1.5	2.2	2.8	3.6
			Btu/h	5,100	7,500	9,600	12,300
		Heating	kW	1.7	2.5	3.2	4.0
			Btu/h	5,800	8,500	10,900	13,600
Power	Power Input (Nominal)	Cooling	W	32.0	32.0	38.0	42.0
		Heating		34.0	35.0	39.0	42.0
	Current Input (Nominal)	Cooling	A	0.20	0.20	0.22	0.23
		Heating		0.20	0.20	0.22	0.23
	MCA			0.3	0.3	0.4	0.4
	MFA			15.0	15.0	15.0	15.0
Heat exchanger	Type		-	Fin & Tube	Fin & Tube	Fin & Tube	Fin & Tube
	Material	Fin	-	Al	Al	Al	Al
		Tube	-	Cu	Cu	Cu	Cu
	Fin Treatment		-	Anti-corrosion	Anti-corrosion	Anti-corrosion	Anti-corrosion
Fan	Type		-	Crossflow Fan	Crossflow Fan	Crossflow Fan	Crossflow Fan
	Quantity		ea	1	1	1	1
	Air Flow Rate	H/M/L (UL)	CMM	6.2/5.7/5.1	6.6/5.7/5.1	7.0/6.2/5.5	8.5/7.5/6.6
			l/s	103.3/95.0/85.0	110.0/95.0/85.0	116.7/103.3/91.7	141.7/125.0/110.0
	External Pressure	Min/Std/Max	mmAq	-	-	-	-
			Pa	-	-	-	-
Fan motor	Type		-	SSR Feedback	SSR Feedback	SSR Feedback	SSR Feedback
	Output x n		-	19W x 1	19W x 1	19W x 1	19W x 1
Piping Connections	Liquid Pipe		Type	Flare connection	Flare connection	Flare connection	Flare connection
			Ø, mm	6.35	6.35	6.35	6.35
			Ø, inch	1/4"	1/4"	1/4"	1/4"
	Gas Pipe		Type	Flare connection	Flare connection	Flare connection	Flare connection
			Ø, mm	12.7	12.7	12.7	12.7
			Ø, inch	1/2"	1/2"	1/2"	1/2"
	Drain Pipe		Ø, mm	ID 18 HOSE	ID 18 HOSE	ID 18 HOSE	ID 18 HOSE
Heat insulation		-	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes	
Field Wiring	Power Source Wire	Minimum	mm2	1.5	1.5	1.5	1.5
	For connection with indoor	Minimum	mm2	0.75	0.75	0.75	0.75
		Remark	-	F1, F2	F1, F2	F1, F2	F1, F2
Refrigerant	Type		-	R410A	R410A	R410A	R410A
	Control Method		-	EEV INCLUDED	EEV INCLUDED	EEV INCLUDED	EEV INCLUDED
Sound	Sound Pressure	High/Mid/Low	dB(A)	30/28/25	31/28/25	31/29/26	36/33/29
	Sound Power	Cooling		47	48	48	51
Dimensions	Net Weight		kg	8.5	8.5	9.0	9.0
	Shipping Weight		kg	10.2	10.2	10.6	10.6
	Net Dimensions (W×H×D)		mm	820 x 285 x 227	820 x 285 x 227	820 x 285 x 227	820 x 285 x 227
	Shipping Dimensions (W×H×D)		mm	880 x 280 x 363	880 x 280 x 363	880 x 280 x 363	880 x 280 x 363

NOTE

- Mode : HP(Heat Pump), HR(Heat Recovery)
- Nominal Cooling : Indoor temperature 27°CDB / 19°CWB, Outdoor temperature 35°CDB / 24°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Nominal Heating : Indoor temperature 20°CDB / 15°CWB, Outdoor temperature 7°CDB / 6°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
- These products contain R410A which is fluorinated greenhouse gas.
- Specifications may be subject to change without prior notice.
- Select wire size based on the value of MCA

1. Specification

BORACAY

Type				WALL MOUNTED	WALL MOUNTED	WALL MOUNTED
Model CODE				AM045KNQDEH/EU	AM056KNQDEH/EU	AM071KNQDEH/EU
Power Supply			Ø, #, V, Hz	1,2,220-240,50	1,2,220-240,50	1,2,220-240,50
Mode			-	HEAT PUMP	HEAT PUMP	HEAT PUMP
Performance	Capacity (Nominal)	Cooling	kW	4.5	5.6	6.8
			Btu/h	15,400	19100	23,200
		Heating	kW	5.0	6.3	7.0
			Btu/h	17100	21,500	23,900
Power	Power Input (Nominal)	Cooling	W	47.0	48.0	51.0
		Heating		47.0	48.0	53.0
	Current Input (Nominal)	Cooling	A	0.27	0.27	0.28
		Heating		0.27	0.27	0.28
	MCA			0.4	0.4	0.4
	MFA			15.0	15.0	15.0
Heat exchanger	Type		-	Fin & Tube	Fin & Tube	Fin & Tube
	Material	Fin	-	Al	Al	Al
		Tube	-	Cu	Cu	Cu
	Fin Treatment		-	Anti-corrosion	Anti-corrosion	Anti-corrosion
Fan	Type		-	Crossflow Fan	Crossflow Fan	Crossflow Fan
	Quantity		ea	1	1	1
	Air Flow Rate	H/M/L (UL)	CMM	13.9/12.4/11.2	14.4/12.9/11.2	15.7/14.1/12.9
			l/s	231.7/206.7/186.7	240.0/215.0/186.7	261.7/235.0/215.0
	External Pressure	Min/Std/Max	mmAq	-	-	-
			Pa	-	-	-
Fan motor	Type		-	SSR Feedback	SSR Feedback	SSR Feedback
	Output x n		-	28W x 1	28W x 1	28W x 1
Piping Connections	Liquid Pipe		Type	Flare connection	Flare connection	Flare connection
			Ø, mm	6.35	6.35	9.52
			Ø, inch	1/4"	1/4"	3/8"
	Gas Pipe		Type	Flare connection	Flare connection	Flare connection
			Ø, mm	12.7	12.7	15.88
			Ø, inch	1/2"	1/2"	5/8"
	Drain Pipe		Ø, mm	ID 18 HOSE	ID 18 HOSE	ID 18 HOSE
Heat insulation		-	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes	
Field Wiring	Power Source Wire	Minimum	mm2	1.5	1.5	1.5
		For connection with indoor	mm2	0.75	0.75	0.75
	Remark		-	F1, F2	F1, F2	F1, F2
Refrigerant	Type		-	R410A	R410A	R410A
	Control Method		-	EEV INCLUDED	EEV INCLUDED	EEV INCLUDED
Sound	Sound Pressure	High/Mid/Low	dB(A)	38/35/33	39/36/33	40/38/35
	Sound Power	Cooling		53	53	55
Dimensions	Net Weight		kg	12.5	12.5	12.5
	Shipping Weight		kg	14.5	14.5	14.5
	Net Dimensions (W×H×D)		mm	1065 x 298 x 243	1065 x 298 x 243	1065 x 298 x 243
	Shipping Dimensions (W×H×D)		mm	1128 x 299 x 378	1128 x 299 x 378	1128 x 299 x 378

NOTE

- Mode : HP(Heat Pump), HR(Heat Recovery)
- Nominal Cooling : Indoor temperature 27°CDB / 19°CWB, Outdoor temperature 35°CDB / 24°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Nominal Heating : Indoor temperature 20°CDB / 15°CWB, Outdoor temperature 7°CDB / 6°CWB, Refrigerant pipe length 7.5m, Level difference 0m.
- Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.
- These products contain R410A which is fluorinated greenhouse gas.
- Specifications may be subject to change without prior notice.
- Select wire size based on the value of MCA

2. Summary Table

BORACAY

Performance Characteristics

Model Code	Net Weight (kg)	Fan Speed	Nominal Capacity			Airflow (CMM)	Sound Pressure (dBA)	Sound Power (dBA)
			Cooling (kW)	Sensible (Kw)	Heating (kW)			
AM015KNTDEH/EU (AM015KNQDEH/EU)	8.0 (8.5)	High	1.5	1.0	1.7	6.2	30	47
		Mid	1.2	0.9	1.6	5.7	28	-
		Low	1.0	0.8	1.5	5.1	25	-
AM022KNTDEH/EU (AM022KNQDEH/EU)	8.0 (8.5)	High	2.2	1.5	2.5	6.6	31	48
		Mid	1.6	1.4	2.3	5.7	28	-
		Low	1.3	1.2	2.2	5.1	25	-
AM028KNTDEH/EU (AM028KNQDEH/EU)	8.5 (9.0)	High	2.8	1.9	3.2	7.0	31	48
		Mid	2.1	1.7	3.0	6.2	29	-
		Low	1.7	1.5	2.8	5.5	26	-
AM036KNTDEH/EU (AM036KNQDEH/EU)	8.5 (9.0)	High	3.6	2.4	4.0	8.5	36	51
		Mid	2.6	2.2	3.8	7.5	33	-
		Low	2.1	1.8	3.5	6.6	29	-
AM045KNTDEH/EU (AM045KNQDEH/EU)	12.0 (12.5)	High	4.5	3.1	5.0	13.9	38	53
		Mid	3.2	2.7	4.7	12.4	35	-
		Low	2.6	2.1	4.5	11.2	33	-
AM056KNTDEH/EU (AM056KNQDEH/EU)	12.0 (12.5)	High	5.6	3.8	6.3	14.4	39	53
		Mid	4.0	3.3	6.0	12.9	36	-
		Low	3.1	2.7	5.6	11.2	33	-
AM071KNTDEH/EU (AM071KNQDEH/EU)	12.0 (12.5)	High	6.8	4.6	7.0	15.7	40	55
		Mid	4.7	4.0	6.6	14.1	38	-
		Low	3.7	2.9	6.3	12.9	35	-

Electrical Characteristics

Model Code	Power Supply (Ø, #, V, Hz)	Power Input (W) (C / H)	Current Input (A) (C / H)	MCA (A)	MFA (A)	FLA (A)
AM015KN*DEH/EU	1Ø/220~240V/50Hz	32/34	0.20/0.20	0.3	15	0.22
AM022KN*DEH/EU	1Ø/220~240V/50Hz	32/35	0.20/0.20	0.3	15	0.22
AM028KN*DEH/EU	1Ø/220~240V/50Hz	38/39	0.22/0.22	0.4	15	0.25
AM036KN*DEH/EU	1Ø/220~240V/50Hz	42/42	0.23/0.23	0.4	15	0.25
AM045KN*DEH/EU	1Ø/220~240V/50Hz	47/47	0.27/0.27	0.4	15	0.30
AM056KN*DEH/EU	1Ø/220~240V/50Hz	48/48	0.27/0.27	0.4	15	0.30
AM071KN*DEH/EU	1Ø/220~240V/50Hz	51/53	0.28/0.28	0.4	15	0.30

NOTE

- MCA : Minimum circuit amperes
- MFA : Maximum fuse amperes
- Select wire size based on the value of MCA

3. Capacity Table

Cooling

TC: Total Capacity, SHC: Sensible Heat Capacity

Capacity Index	Outdoor Air Temp. (°C,DB)	Indoor temperature													
		20(°C,DB)		23(°C,DB)		26(°C,DB)		27(°C,DB)		28(°C,DB)		30(°C,DB)		32(°C,DB)	
		14(°C,WB)		16(°C,WB)		18(°C,WB)		19(°C,WB)		20(°C,WB)		22(°C,WB)		24(°C,WB)	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
015	10	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.7	1.1	1.8	1.0
	12	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.7	1.1	1.8	1.0
	14	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.7	1.1	1.8	1.0
	16	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	18	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	20	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	21	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	23	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	25	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	27	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	29	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	31	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	33	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	35	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	37	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.8	1.0
	39	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.7	0.9
	42	1.0	0.9	1.2	1.0	1.4	1.0	1.5	1.0	1.6	1.0	1.6	1.1	1.7	0.9
022	10	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.5	1.6	2.6	1.4
	12	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.5	1.6	2.6	1.4
	14	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.5	1.6	2.6	1.4
	16	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	18	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	20	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	21	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	23	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	25	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	27	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	29	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	31	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	33	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	35	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	37	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.6	1.4
	39	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.5	1.3
	42	1.5	1.3	1.8	1.5	2.1	1.5	2.2	1.5	2.3	1.5	2.4	1.5	2.4	1.3
028	10	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.4	1.9
	12	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	14	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	16	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	18	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	20	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	21	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	23	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	25	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	27	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	29	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	31	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	33	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	35	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	37	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.1	1.9	3.3	1.8
	39	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	3.0	1.8	3.2	1.7
	42	1.9	1.6	2.3	1.8	2.6	2.0	2.8	1.9	2.9	1.9	2.9	1.8	3.1	1.7
	44	1.9	1.6	2.3	1.8	2.5	1.9	2.7	1.8	2.8	1.8	2.8	1.7	3.0	1.6
	46	1.9	1.6	2.3	1.8	2.5	1.9	2.6	1.8	2.7	1.8	2.7	1.6	2.9	1.6
	48	1.9	1.6	2.2	1.8	2.4	1.9	2.5	1.7	2.6	1.7	2.7	1.6	2.8	1.5

3. Capacity Table

Cooling

TC: Total Capacity, SHC: Sensible Heat Capacity

Capacity Index	Outdoor Air Temp. (°C,DB)	Indoor temperature													
		20(°C,DB)		23(°C,DB)		26(°C,DB)		27(°C,DB)		28(°C,DB)		30(°C,DB)		32(°C,DB)	
		14(°C,WB)		16(°C,WB)		18(°C,WB)		19(°C,WB)		20(°C,WB)		22(°C,WB)		24(°C,WB)	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
036	10	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.3	2.3
	12	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.3	2.3
	14	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.3	2.3
	16	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.3	2.3
	18	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.3	2.3
	20	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.2	2.3
	21	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.2	2.3
	23	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.2	2.3
	25	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.2	2.3
	27	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.2	2.3
	29	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.2	2.3
	31	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.2	2.3
	33	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.2	2.3
	35	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	4.0	2.4	4.2	2.3
	37	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	3.9	2.3	4.2	2.3
	39	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	3.9	2.3	4.1	2.2
045	42	2.5	2.1	2.9	2.2	3.4	2.3	3.6	2.4	3.7	2.4	3.8	2.3	4.0	2.1
	44	2.5	2.1	2.9	2.2	3.3	2.2	3.4	2.3	3.6	2.3	3.7	2.2	3.9	2.1
	46	2.5	2.1	2.9	2.2	3.2	2.2	3.3	2.2	3.4	2.2	3.6	2.1	3.8	2.0
	48	2.5	2.1	2.8	2.2	3.2	2.1	3.2	2.2	3.4	2.2	3.5	2.0	3.6	1.9
	10	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.1	3.1	5.4	2.8
	12	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.1	3.1	5.4	2.8
	14	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.4	2.8
	16	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.3	2.8
	18	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.3	2.8
	20	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.3	2.8
	21	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.3	2.8
	23	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.3	2.8
	25	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.3	2.8
	27	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.3	2.8
	29	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.3	2.8
	31	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.3	2.8
	33	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.3	2.8
	35	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	5.0	3.0	5.3	2.8
	37	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	4.9	2.9	5.2	2.7
	39	3.1	2.4	3.7	2.7	4.3	2.9	4.5	3.0	4.7	3.0	4.9	2.9	5.1	2.6
056	42	3.1	2.4	3.7	2.7	4.2	2.9	4.4	3.0	4.6	3.0	4.8	2.9	5.0	2.5
	44	3.1	2.4	3.7	2.7	4.1	2.8	4.3	2.9	4.5	2.9	4.6	2.8	4.8	2.5
	46	3.1	2.4	3.7	2.7	4.0	2.8	4.2	2.8	4.3	2.8	4.5	2.7	4.7	2.4
	48	3.1	2.3	3.6	2.6	4.0	2.7	4.0	2.7	4.3	2.7	4.3	2.6	4.5	2.3
	10	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.3	3.9	6.7	3.6
	12	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.3	3.9	6.7	3.6
	14	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.7	3.6
	16	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.5
	18	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.5
	20	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.5
	21	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.5
	23	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.5
	25	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.5
	27	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.5
	29	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.5
	31	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.5
	33	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.5
	35	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.2	3.8	6.6	3.5
	37	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.1	3.7	6.5	3.4
	39	3.9	3.0	4.6	3.4	5.3	3.7	5.6	3.8	5.8	3.8	6.1	3.7	6.4	3.3
	42	3.9	3.0	4.6	3.4	5.3	3.7	5.5	3.7	5.7	3.8	6.0	3.6	6.2	3.2
	44	3.9	3.0	4.6	3.4	5.1	3.6	5.3	3.6	5.6	3.6	5.8	3.5	6.0	3.1
	46	3.9	3.0	4.6	3.4	5.0	3.5	5.2	3.5	5.4	3.5	5.6	3.4	5.9	3.0
	48	3.9	3.0	4.5	3.3	5.0	3.5	5.0	3.4	5.3	3.5	5.4	3.3	5.7	2.9

3. Capacity Table

Cooling

TC: Total Capacity, SHC: Sensible Heat Capacity

Capacity Index	Outdoor Air Temp. (°C,DB)	Indoor temperature													
		20(°C,DB)		23(°C,DB)		26(°C,DB)		27(°C,DB)		28(°C,DB)		30(°C,DB)		32(°C,DB)	
		14(°C,WB)		16(°C,WB)		18(°C,WB)		19(°C,WB)		20(°C,WB)		22(°C,WB)		24(°C,WB)	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
071	10	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.4	4.8	7.9	4.8	8.6	4.6
	12	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.4	4.8	7.9	4.8	8.5	4.5
	14	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.4	4.8	7.9	4.8	8.5	4.5
	16	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.4	4.8	7.9	4.8	8.5	4.5
	18	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.8	4.7	8.4	4.4
	20	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.8	4.7	8.4	4.4
	21	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.8	4.7	8.4	4.4
	23	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.8	4.7	8.4	4.4
	25	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.8	4.7	8.4	4.4
	27	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.8	4.7	8.4	4.4
	29	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.8	4.7	8.4	4.4
	31	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.8	4.7	8.4	4.4
	33	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.8	4.7	8.4	4.4
	35	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.8	4.7	8.4	4.4
	37	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.8	4.7	8.2	4.3
	39	4.9	3.9	5.7	4.3	6.7	4.7	7.1	4.8	7.3	4.8	7.7	4.6	8.0	4.2
	42	4.9	3.9	5.7	4.3	6.6	4.7	7.0	4.7	7.2	4.7	7.6	4.5	7.8	4.1
	44	4.9	3.9	5.7	4.3	6.5	4.5	6.8	4.6	7.0	4.6	7.3	4.3	7.6	3.9
	46	4.9	3.9	5.7	4.2	6.3	4.5	6.6	4.4	6.8	4.5	7.1	4.2	7.4	3.8
	48	4.8	3.8	5.6	4.2	6.2	4.4	6.4	4.3	6.7	4.4	6.9	4.1	7.1	3.7

3. Capacity Table

Heating

TC: Total Capacity

Capacity Index	Outdoor Air Temp. (°C)		Indoor temperature (°C,DB)				
			16(°C,DB)	18(°C,DB)	20(°C,DB)	22(°C,DB)	24(°C,DB)
			TC	TC	TC	TC	TC
	DB	WB	kW	kW	kW	kW	kW
015	-19.8	-20.0	1.0	1.0	1.0	1.0	1.0
	-18.8	-19.0	1.0	1.0	1.0	1.0	1.0
	-16.7	-17.0	1.1	1.1	1.1	1.1	1.1
	-14.7	-15.0	1.2	1.1	1.1	1.1	1.1
	-12.6	-13.0	1.2	1.2	1.2	1.2	1.2
	-10.5	-11.0	1.4	1.4	1.3	1.3	1.3
	-9.5	-10.0	1.4	1.4	1.3	1.3	1.3
	-8.5	-9.1	1.5	1.5	1.4	1.4	1.4
	-7.0	-7.6	1.6	1.5	1.5	1.4	1.4
	-5.0	-5.6	1.6	1.6	1.6	1.5	1.5
	-3.0	-3.7	1.7	1.7	1.6	1.6	1.5
	0.0	-0.7	1.8	1.7	1.7	1.6	1.5
	3.0	2.2	1.8	1.8	1.7	1.6	1.5
	5.0	4.1	1.9	1.8	1.7	1.6	1.5
	7.0	6.0	1.9	1.8	1.7	1.6	1.5
	9.0	7.9	2.0	1.8	1.7	1.6	1.5
022	-19.8	-20.0	1.5	1.5	1.5	1.5	1.5
	-18.8	-19.0	1.5	1.5	1.5	1.5	1.5
	-16.7	-17.0	1.6	1.6	1.6	1.6	1.6
	-14.7	-15.0	1.7	1.6	1.6	1.6	1.6
	-12.6	-13.0	1.8	1.8	1.8	1.8	1.7
	-10.5	-11.0	2.0	2.0	1.9	1.9	1.9
	-9.5	-10.0	2.1	2.0	2.0	1.9	1.9
	-8.5	-9.1	2.2	2.1	2.1	2.0	2.0
	-7.0	-7.6	2.3	2.2	2.2	2.0	2.0
	-5.0	-5.6	2.4	2.3	2.3	2.2	2.2
	-3.0	-3.7	2.5	2.5	2.4	2.3	2.2
	0.0	-0.7	2.6	2.5	2.5	2.3	2.2
	3.0	2.2	2.7	2.6	2.5	2.3	2.2
	5.0	4.1	2.8	2.7	2.5	2.3	2.2
	7.0	6.0	2.8	2.7	2.5	2.3	2.2
	9.0	7.9	3.0	2.7	2.5	2.3	2.2
028	-19.8	-20.0	1.9	1.9	1.9	1.9	1.9
	-18.8	-19.0	1.9	1.9	1.9	1.9	1.9
	-16.7	-17.0	2.0	2.0	2.0	2.0	1.9
	-14.7	-15.0	2.1	2.1	2.0	2.0	1.9
	-12.6	-13.0	2.2	2.2	2.2	2.1	2.1
	-10.5	-11.0	2.3	2.3	2.3	2.3	2.2
	-9.5	-10.0	2.3	2.3	2.3	2.3	2.2
	-8.5	-9.1	2.4	2.4	2.4	2.4	2.3
	-7.0	-7.6	2.5	2.4	2.4	2.4	2.3
	-5.0	-5.6	2.6	2.6	2.5	2.5	2.4
	-3.0	-3.7	2.8	2.7	2.7	2.6	2.5
	0.0	-0.7	2.9	2.8	2.8	2.7	2.6
	3.0	2.2	3.0	3.0	2.9	2.8	2.7
	5.0	4.1	3.2	3.1	3.1	2.9	2.7
	7.0	6.0	3.3	3.2	3.2	3.0	2.7
	9.0	7.9	3.4	3.3	3.2	3.0	2.7
	11.0	9.8	3.5	3.3	3.2	3.0	2.7
	13.0	11.8	3.6	3.4	3.2	3.0	2.7
	15.0	13.7	3.7	3.4	3.2	3.0	2.7

3. Capacity Table

Heating

TC: Total Capacity

Capacity Index	Outdoor Air Temp. (°C)		Indoor temperature (°C,DB)				
			16(°C,DB)	18(°C,DB)	20(°C,DB)	22(°C,DB)	24(°C,DB)
	DB	WB	TC kW	TC kW	TC kW	TC kW	TC kW
036	-19.8	-20.0	2.4	2.4	2.3	2.3	2.3
	-18.8	-19.0	2.5	2.4	2.3	2.3	2.3
	-16.7	-17.0	2.6	2.5	2.4	2.4	2.3
	-14.7	-15.0	2.7	2.6	2.5	2.5	2.4
	-12.6	-13.0	2.8	2.7	2.7	2.6	2.6
	-10.5	-11.0	2.9	2.9	2.9	2.8	2.8
	-9.5	-10.0	2.9	2.9	2.9	2.8	2.8
	-8.5	-9.1	3.0	3.0	3.0	2.9	2.9
	-7.0	-7.6	3.1	3.1	3.0	3.0	2.9
	-5.0	-5.6	3.3	3.2	3.2	3.1	3.0
	-3.0	-3.7	3.4	3.4	3.3	3.2	3.1
	0.0	-0.7	3.6	3.6	3.5	3.4	3.2
	3.0	2.2	3.8	3.7	3.7	3.5	3.4
	5.0	4.1	3.9	3.9	3.8	3.6	3.4
	7.0	6.0	4.1	4.1	4.0	3.7	3.4
	9.0	7.9	4.2	4.1	4.0	3.7	3.4
045	-19.8	-20.0	3.1	3.0	3.0	2.9	2.9
	-18.8	-19.0	3.1	3.1	3.1	3.0	3.0
	-16.7	-17.0	3.2	3.2	3.1	3.0	3.0
	-14.7	-15.0	3.3	3.3	3.2	3.1	3.0
	-12.6	-13.0	3.5	3.4	3.3	3.3	3.2
	-10.5	-11.0	3.6	3.6	3.5	3.5	3.4
	-9.5	-10.0	3.7	3.7	3.6	3.5	3.5
	-8.5	-9.1	3.8	3.7	3.7	3.6	3.5
	-7.0	-7.6	3.9	3.8	3.8	3.7	3.6
	-5.0	-5.6	4.1	4.1	4.0	3.9	3.7
	-3.0	-3.7	4.3	4.2	4.2	4.1	3.9
	0.0	-0.7	4.5	4.4	4.4	4.2	4.0
	3.0	2.2	4.7	4.7	4.6	4.4	4.2
	5.0	4.1	4.9	4.8	4.8	4.5	4.2
	7.0	6.0	5.2	5.1	5.0	4.6	4.2
	9.0	7.9	5.3	5.2	5.0	4.6	4.2
056	-19.8	-20.0	3.9	3.8	3.8	3.7	3.7
	-18.8	-19.0	3.9	3.9	3.8	3.7	3.7
	-16.7	-17.0	4.0	4.0	3.9	3.8	3.8
	-14.7	-15.0	4.2	4.1	4.0	3.9	3.8
	-12.6	-13.0	4.4	4.3	4.2	4.1	4.0
	-10.5	-11.0	4.6	4.5	4.4	4.4	4.3
	-9.5	-10.0	4.7	4.6	4.6	4.5	4.4
	-8.5	-9.1	4.8	4.7	4.7	4.6	4.5
	-7.0	-7.6	4.9	4.8	4.8	4.7	4.5
	-5.0	-5.6	5.2	5.1	5.0	4.9	4.7
	-3.0	-3.7	5.4	5.3	5.3	5.1	4.9
	0.0	-0.7	5.7	5.6	5.5	5.3	5.0
	3.0	2.2	5.9	5.9	5.8	5.6	5.3
	5.0	4.1	6.2	6.1	6.0	5.7	5.3
	7.0	6.0	6.5	6.4	6.3	5.8	5.3
	9.0	7.9	6.7	6.5	6.3	5.8	5.3
	11.0	9.8	6.9	6.6	6.3	5.8	5.3
	13.0	11.8	7.1	6.7	6.3	5.8	5.3
	15.0	13.7	7.3	6.8	6.3	5.8	5.3

3. Capacity Table

Heating

TC: Total Capacity


Capacity Index	Outdoor Air Temp. (°C)		Indoor temperature (°C,DB)				
			16(°C,DB)	18(°C,DB)	20(°C,DB)	22(°C,DB)	24(°C,DB)
			TC	TC	TC	TC	TC
	DB	WB	kW	kW	kW	kW	kW
071	-19.8	-20.0	5.0	4.9	4.8	4.8	4.8
	-18.8	-19.0	5.1	5.0	4.8	4.8	4.8
	-16.7	-17.0	5.2	5.1	4.9	4.9	4.8
	-14.7	-15.0	5.4	5.3	5.1	4.9	4.8
	-12.6	-13.0	5.6	5.4	5.3	5.2	5.1
	-10.5	-11.0	5.8	5.7	5.6	5.5	5.5
	-9.5	-10.0	5.9	5.9	5.8	5.7	5.6
	-8.5	-9.1	6.0	6.0	5.9	5.8	5.7
	-7.0	-7.6	6.2	6.2	6.1	5.9	5.8
	-5.0	-5.6	6.5	6.4	6.4	6.2	5.9
	-3.0	-3.7	6.9	6.7	6.7	6.4	6.2
	0.0	-0.7	7.2	7.1	7.0	6.7	6.4
	3.0	2.2	7.5	7.4	7.3	7.1	6.7
	5.0	4.1	7.9	7.8	7.7	7.2	6.7
	7.0	6.0	8.2	8.1	8.0	7.4	6.7
	9.0	7.9	8.5	8.2	8.0	7.4	6.7
	11.0	9.8	8.7	8.3	8.0	7.4	6.7
	13.0	11.8	9.0	8.5	8.0	7.4	6.7
	15.0	13.7	9.3	8.6	8.0	7.4	6.7

No.	Name	Description
1	Liquid pipe connection	Ø6.35 (Ø1/4)
2	Gas pipe connection	Ø12.7 (Ø1/2)
3	Drain pipe connection	ID 18 HOSE
4	Power & Communication wiring conduit	

4. Dimensional Drawing

BORACAY

AM045/056/071KN*D****

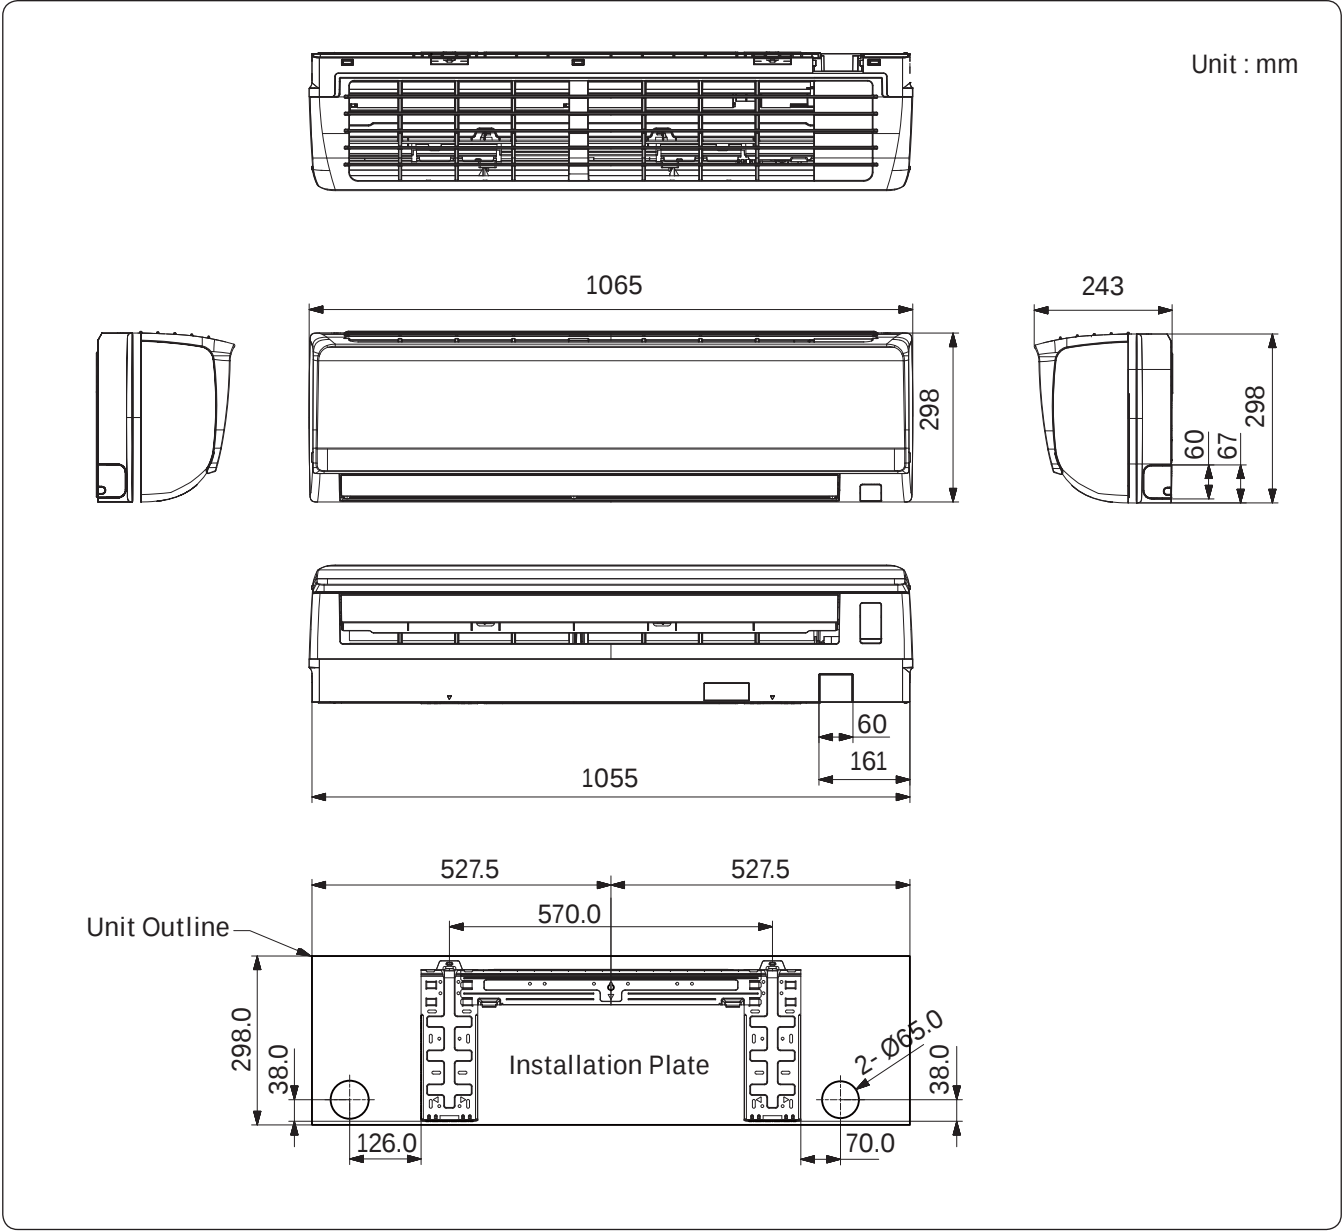


No.	Name	Description	
		045 / 056	071
1	Liquid pipe connection	Ø6.35 (Ø1/4)	Ø9.52 (Ø3/8)
2	Gas pipe connection	Ø12.7 (Ø1/2)	Ø15.88 (Ø5/8)
3	Drain pipe connection	ID 18 HOSE	
4	Power & Communication wiring conduit		

5. Center of Gravity


BORACAY

AM015/022/028/036KN*D*****

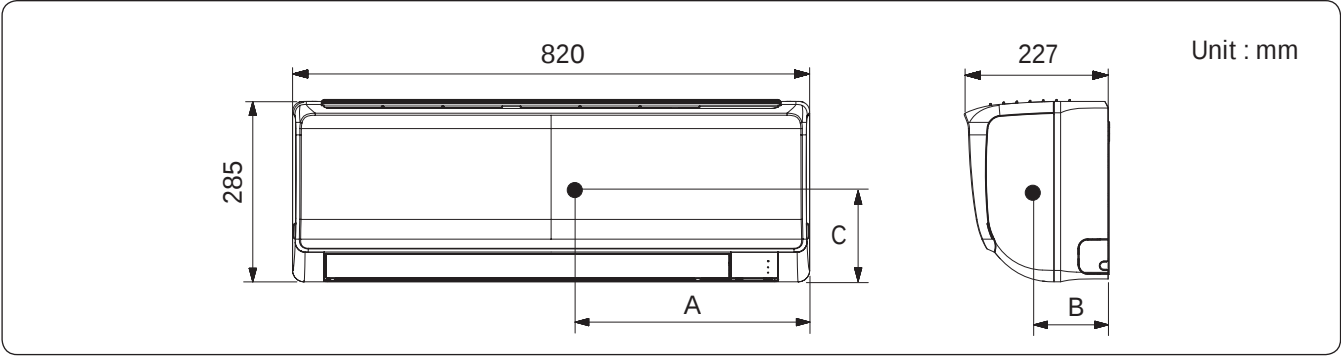

A	B	C
375	105	155

AM045/056/071KN*D*****

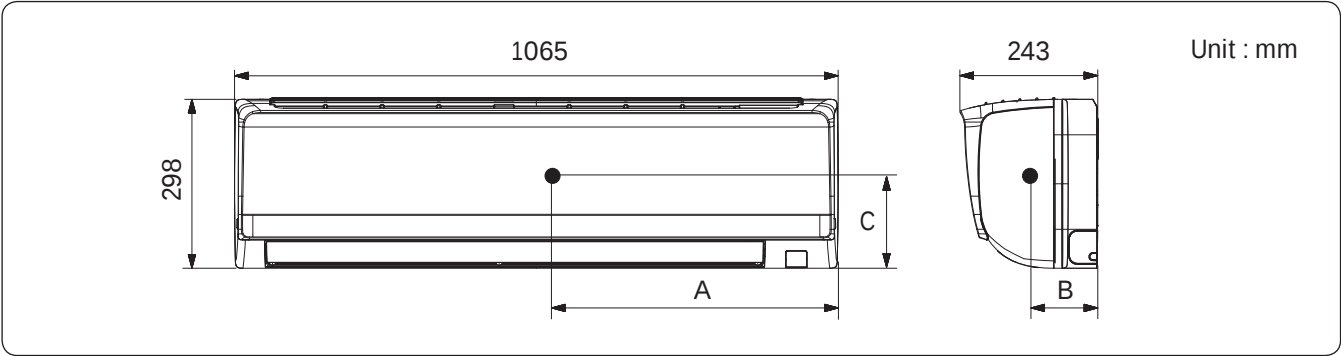


A	B	C
460	120	160

6. Electrical Wiring Diagram

BORACAY

AM***KN*D*****

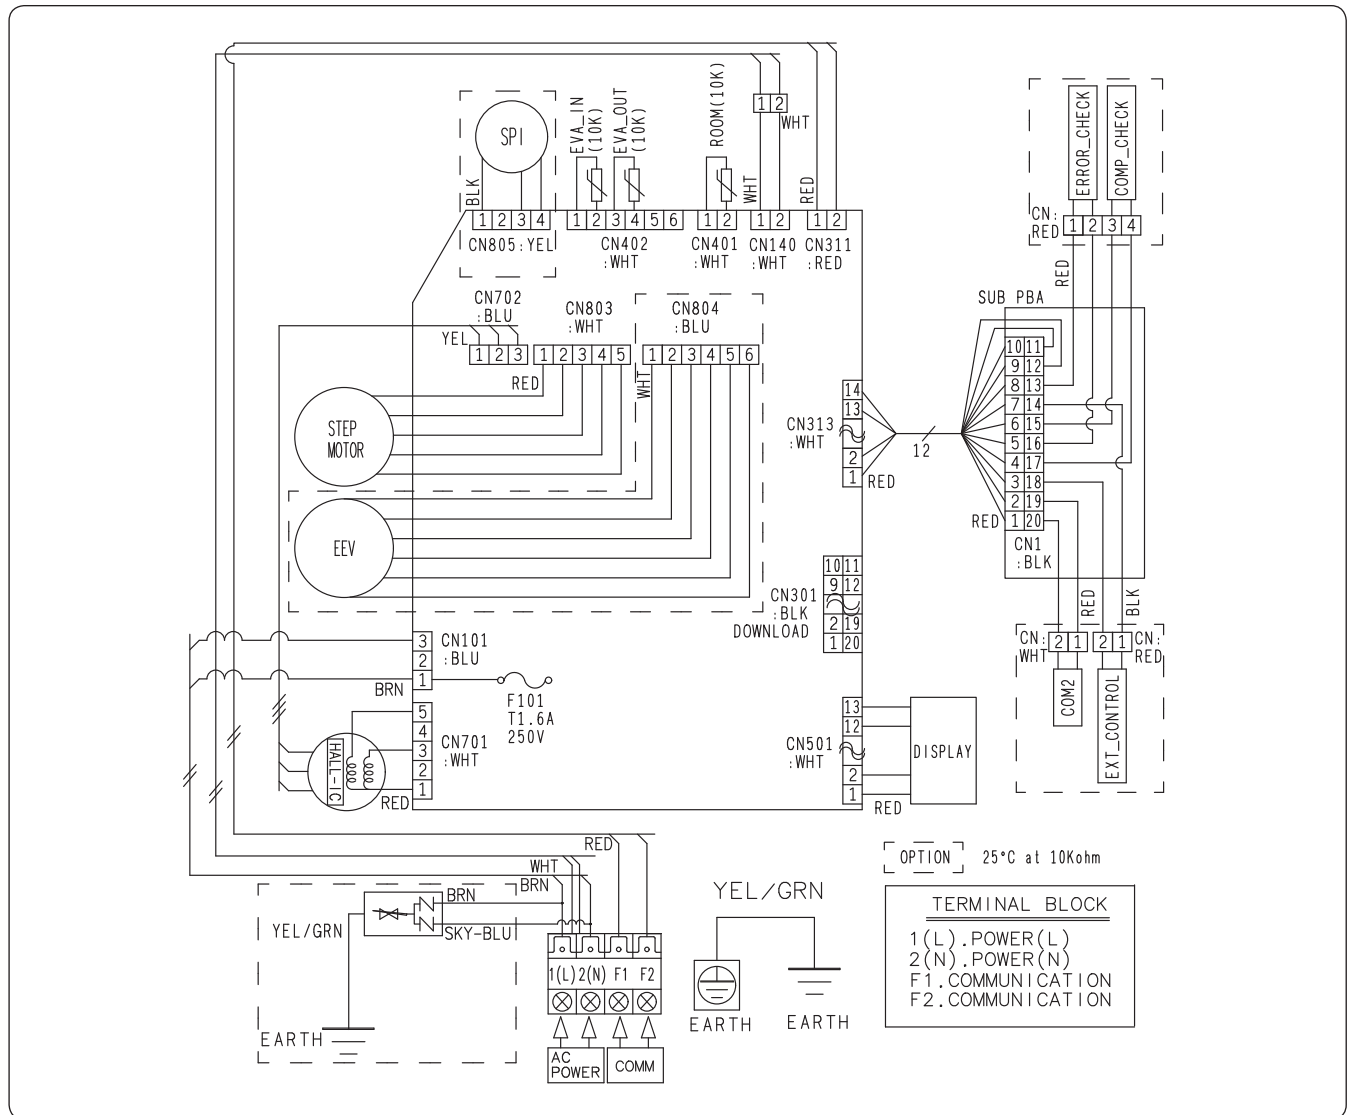

SUB PBA	Printed Circuit Board(SUB)	SPI	S-Plasma ion	EVA-OUT(10K)	Thermistor EVA OUT(10K)
[HALL IC]	Motor For FAN	ROOM(10K)	Thermistor ROOM In(10K)	EVA-IN(10K)	Thermistor EVA IN(10K)
EEV	electronic expansion valve				

 NOTE


- This wiring diagram applies only to the Indoor unit.
- Symbols show as follow :
BLK: black, RED: red, BLU: blue, WHT: white, YEL: yellow, BRN: brown, sky: sky blue, GRN: green
- For connection wiring indoor-outdoor transmission F1-F2, indoor-wired remote controller transmission F3-F4.
-  Protective earth(SCREW)



7. Sound Data

BORACAY

Sound Pressure Level

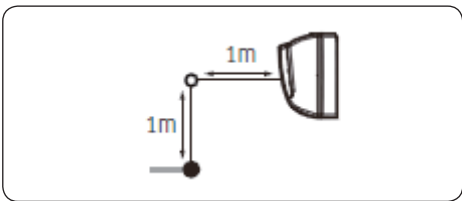


Unit: dB(A)


MODEL	Hi	MID	LOW
AM015KN*D*****	30	28	25
AM022KN*D*****	31	28	25
AM028KN*D*****	31	29	26
AM036KN*D*****	36	33	29

NR Curve


1) AM015KN*D*****

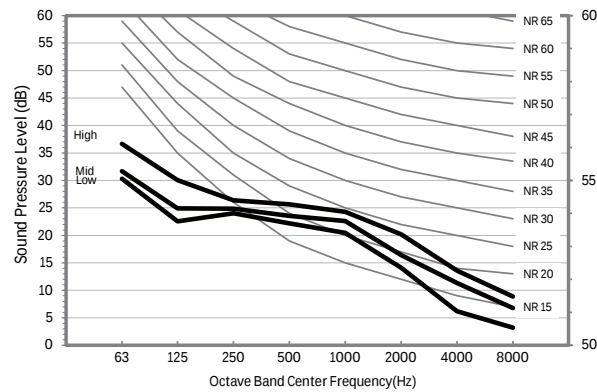


2) AM022KN*D*****

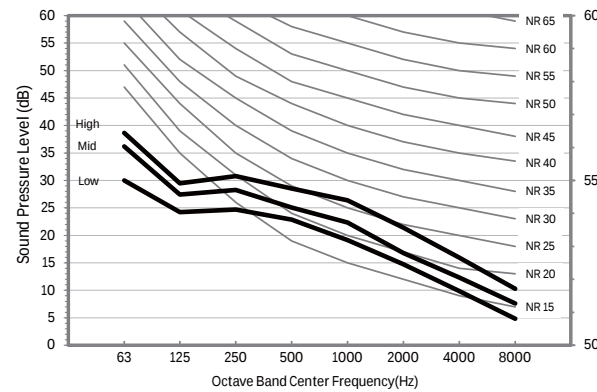

3) AM028KN*D*****

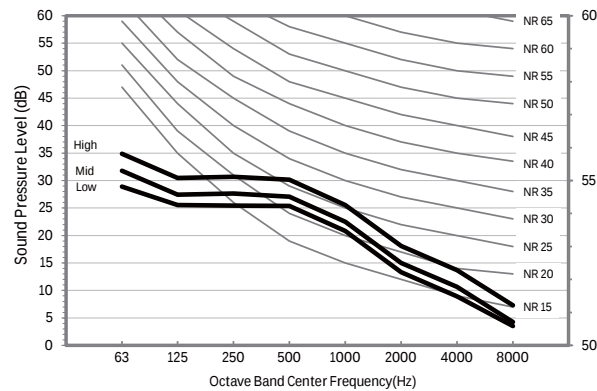

4) AM036KN*D*****

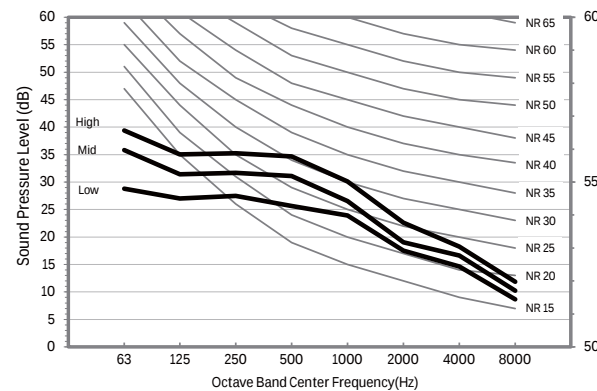

NOTE


- Specifications may be subject to change without prior notice
- Sound Pressure Level
 - Sound Pressure level is obtained in an anechoic room.
 - Sound Pressure level is a relative value, depending on the distance and acoustic environment.
 - Sound Pressure level may differ depending on operation condition.
 - dBA = A-weighted sound power level.
 - Reference acoustic pressure 0 dB = 20μPa

7. Sound Data

BORACAY

Sound Pressure Level


Unit: dB(A)

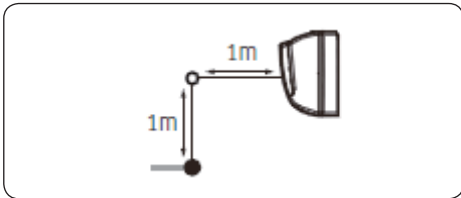


MODEL	Hi	MID	LOW
AM045KN*D*****	38	35	33
AM056KN*D*****	39	36	33
AM071KN*D*****	40	38	35

NR Curve


5) AM045KN*D*****

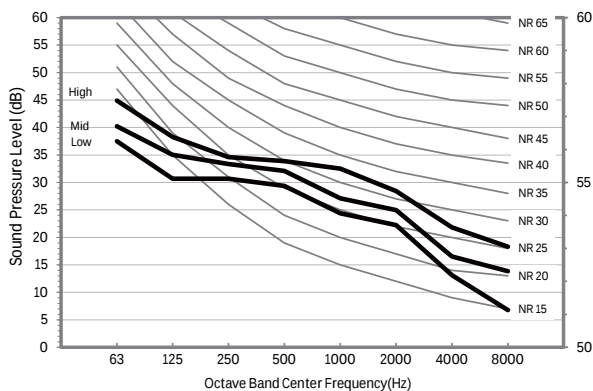

6) AM056KN*D*****

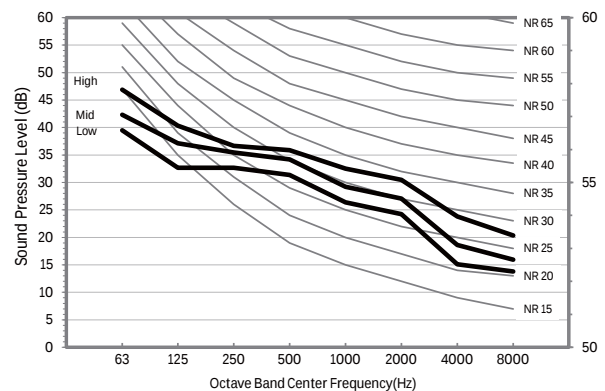

7) AM071KN*D*****

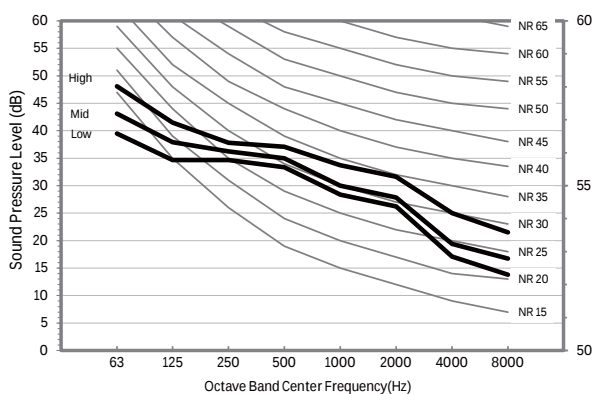

NOTE

- Specifications may be subject to change without prior notice
- Sound Pressure Level
 - Sound Pressure level is obtained in an anechoic room.
 - Sound Pressure level is a relative value, depending on the distance and acoustic environment.
 - Sound Pressure level may differ depending on operation condition.
 - dBA = A-weighted sound power level.
 - Reference acoustic pressure 0 dB = 20μPa

7. Sound Data


BORACAY

Sound Power Level


Unit: dB(A)

MODEL	Power
AM015KN*D*****	47
AM022KN*D*****	48
AM028KN*D*****	48
AM036KN*D*****	51


1) AM015KN*D*****

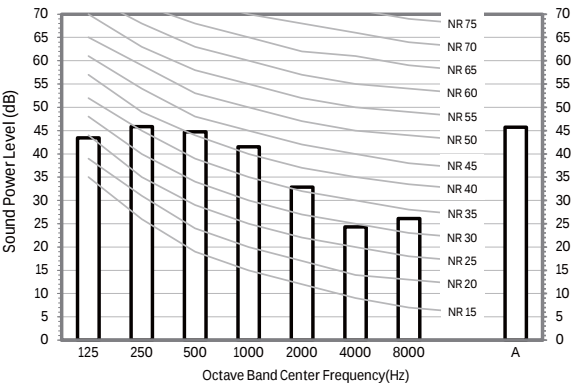


2) AM022KN*D*****

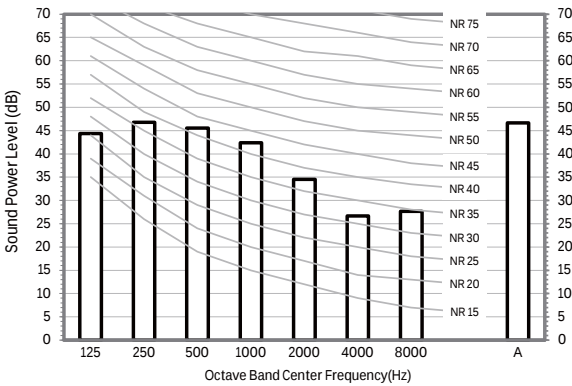

3) AM028KN*D*****

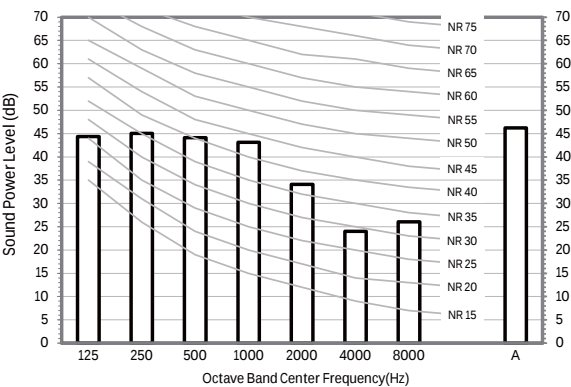

4) AM036KN*D*****

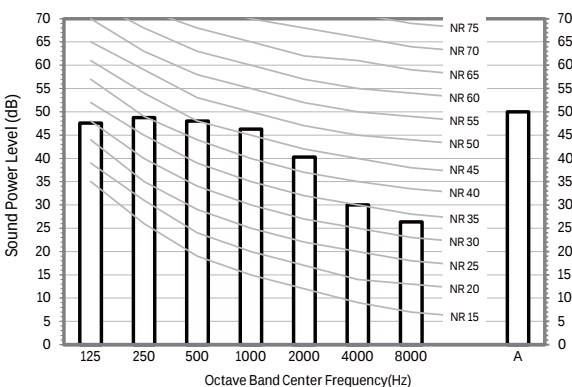

NOTE

- Specifications may be subject to change without prior notice.
 - Sound power level is an absolute value that a sound source generates.
 - dBA = A-weighted sound power level.
 - Reference power: 1pW.
 - Measured according to ISO 3741.

7. Sound Data


BORACAY

Sound Power Level


Unit: dB(A)

MODEL	Power
AM045KN*D*****	53
AM056KN*D*****	53
AM071KN*D*****	55


5) AM045KN*D*****

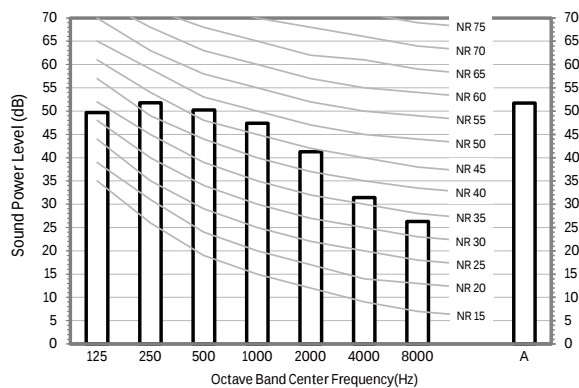

6) AM056KN*D*****

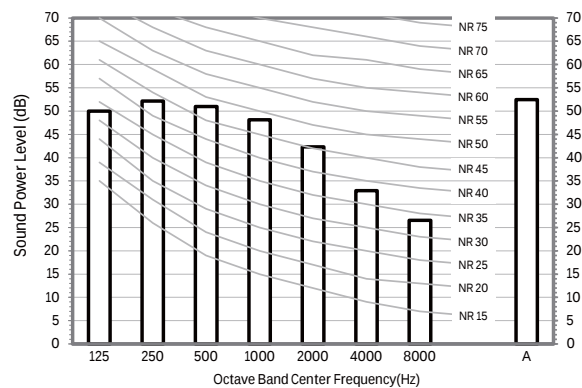

7) AM071KN*D*****

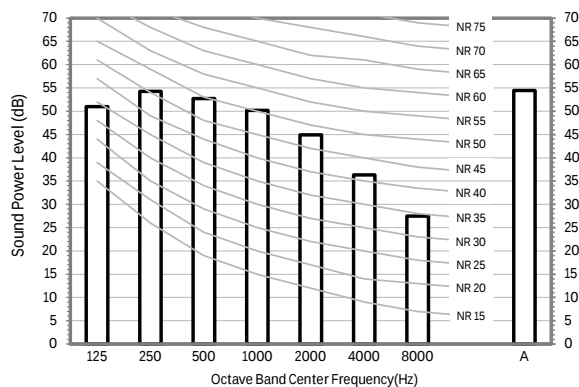

NOTE

- Specifications may be subject to change without prior notice.
 - Sound power level is an absolute value that a sound source generates.
 - dBA = A-weighted sound power level.
 - Reference power: 1pW.
 - Measured according to ISO 3741.


8. Temperature and Air Flow Distribution

BORACAY


AM015KN*D*****

Discharge angle : 26°


1) Cooling air velocity distribution

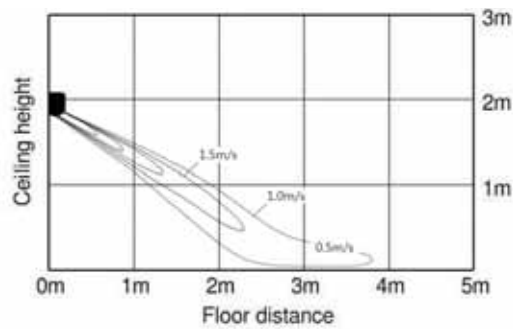


2) Cooling temperature distribution

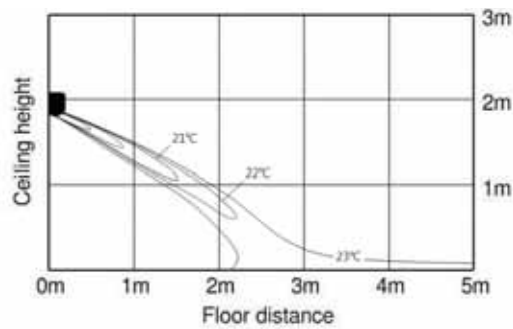

3) Heating air velocity distribution

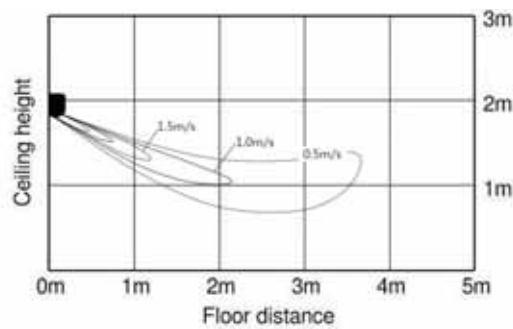

4) Heating temperature distribution

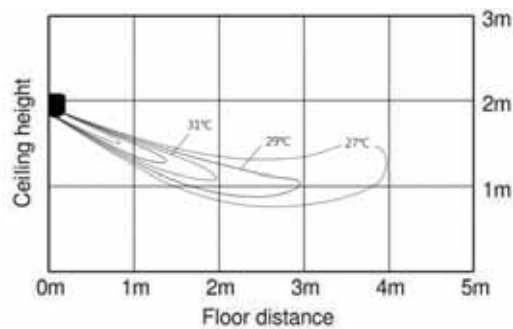


8. Temperature and Air Flow Distribution

BORACAY


AM022KN*D*****

Discharge angle : 26°


1) Cooling air velocity distribution

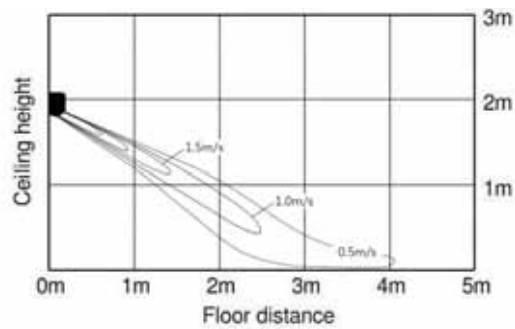


2) Cooling temperature distribution

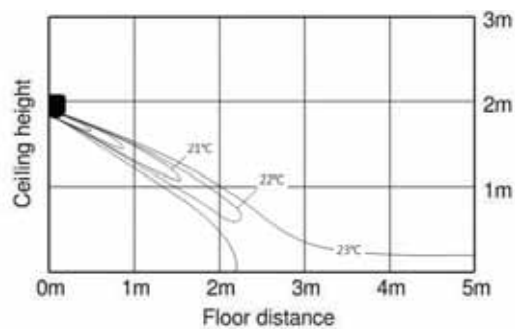

3) Heating air velocity distribution

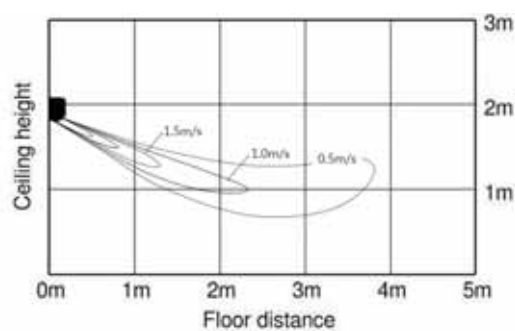

4) Heating temperature distribution

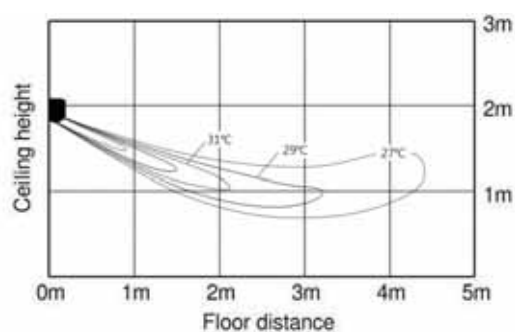


8. Temperature and Air Flow Distribution

BORACAY


AM028KN*D*****

Discharge angle : 26°


1) Cooling air velocity distribution

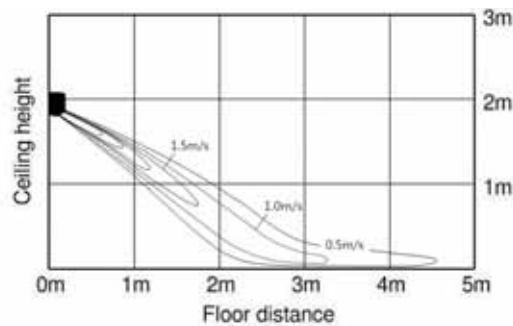


2) Cooling temperature distribution

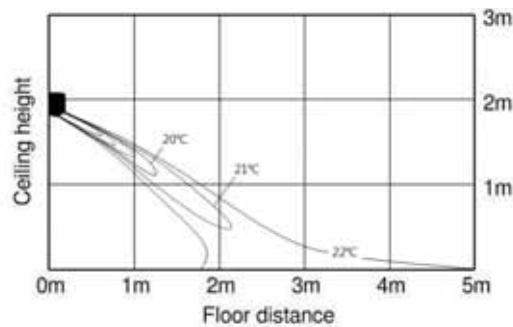

3) Heating air velocity distribution

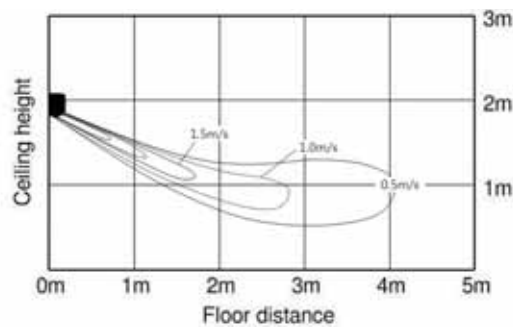

4) Heating temperature distribution

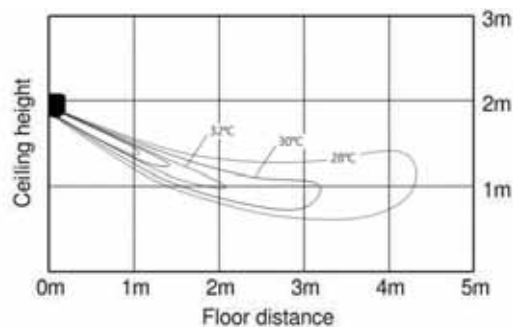


8. Temperature and Air Flow Distribution

BORACAY


AM036KN*D*****

Discharge angle : 26°


1) Cooling air velocity distribution

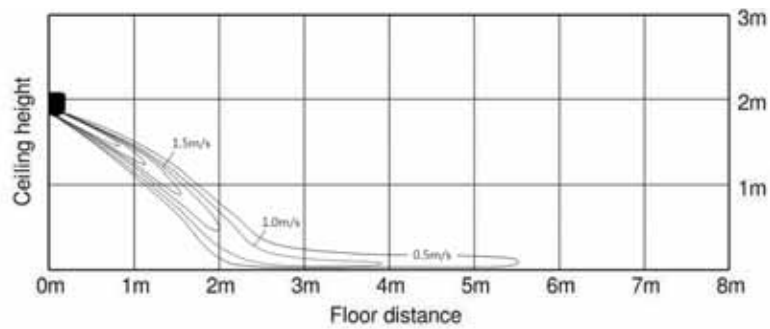


2) Cooling temperature distribution

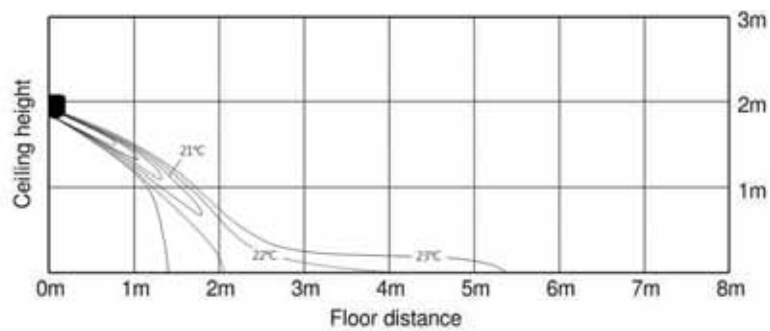

3) Heating air velocity distribution

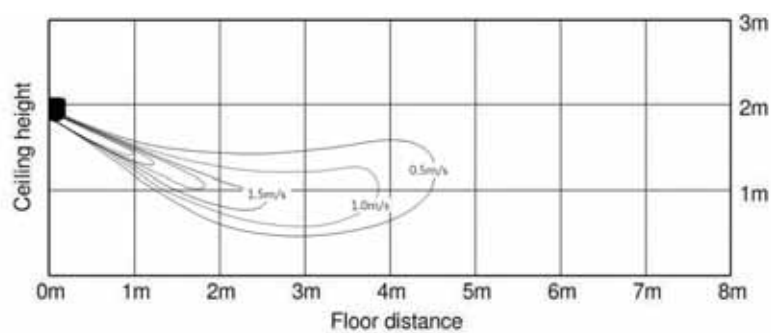

4) Heating temperature distribution

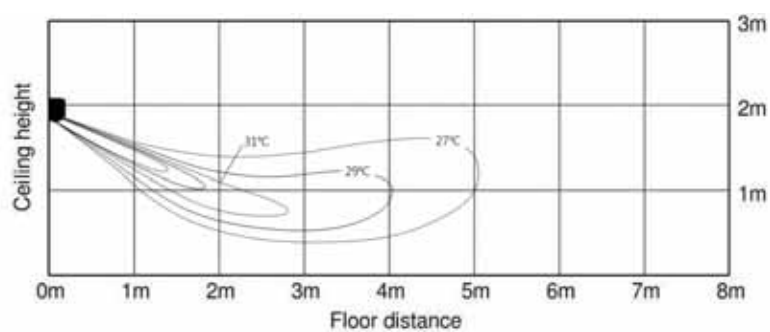


8. Temperature and Air Flow Distribution

BORACAY


AM045KN*D*****

Discharge angle : 26°


1) Cooling air velocity distribution

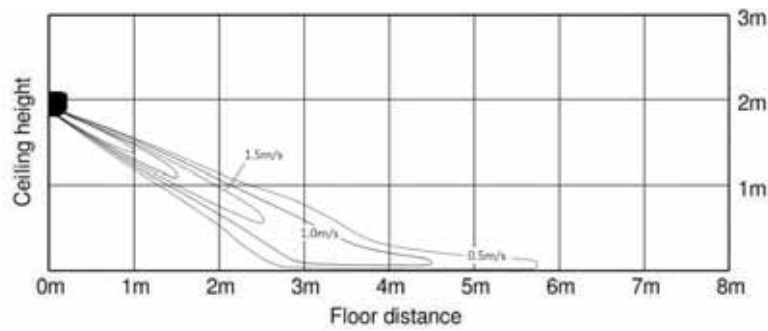


2) Cooling temperature distribution

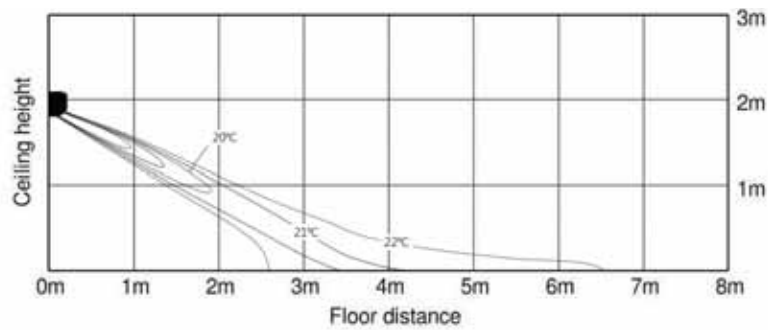

3) Heating air velocity distribution

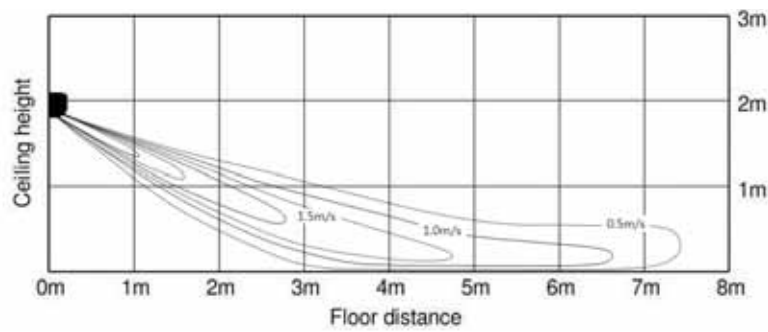

4) Heating temperature distribution

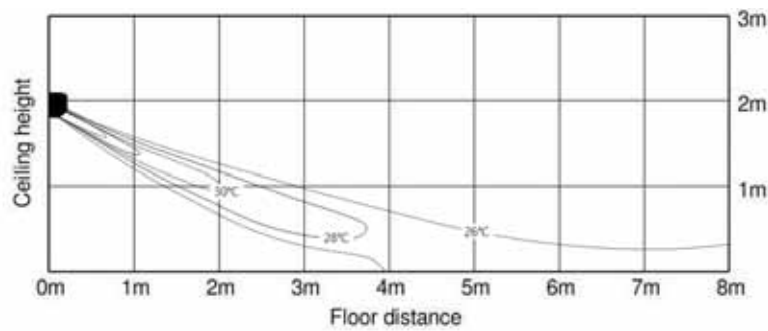


8. Temperature and Air Flow Distribution

BORACAY


AM056KN*D*****

Discharge angle : 26°


1) Cooling air velocity distribution

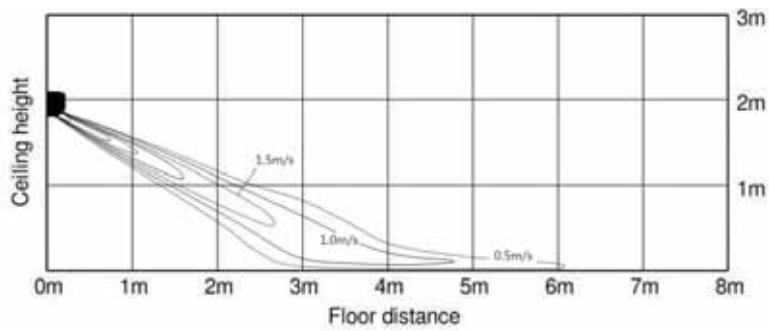


2) Cooling temperature distribution

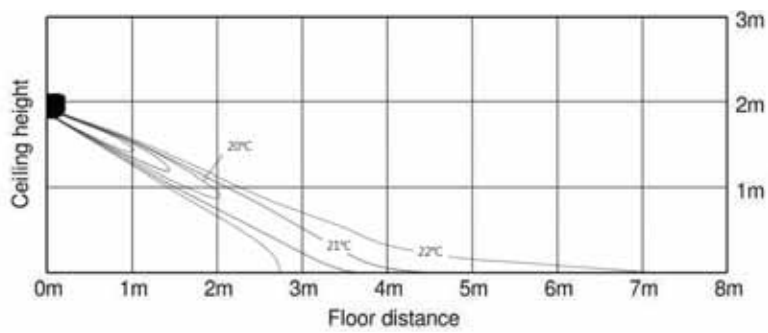

3) Heating air velocity distribution

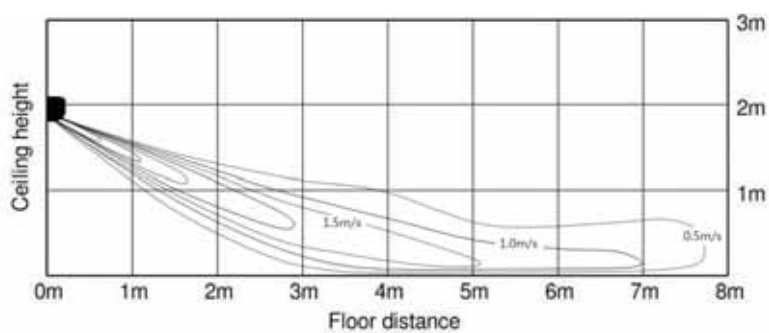

4) Heating temperature distribution

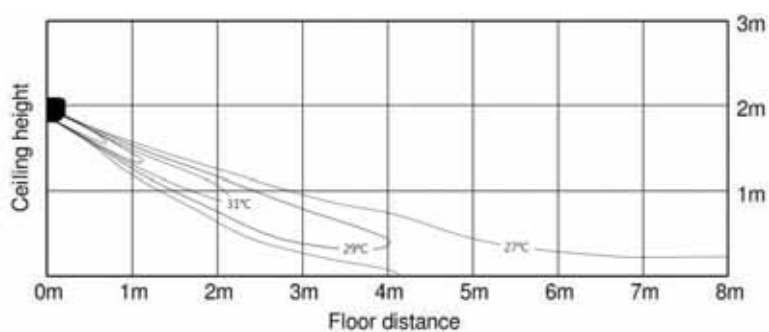


8. Temperature and Air Flow Distribution

BORACAY


AM071KN*D*****

Discharge angle : 26°


1) Cooling air velocity distribution

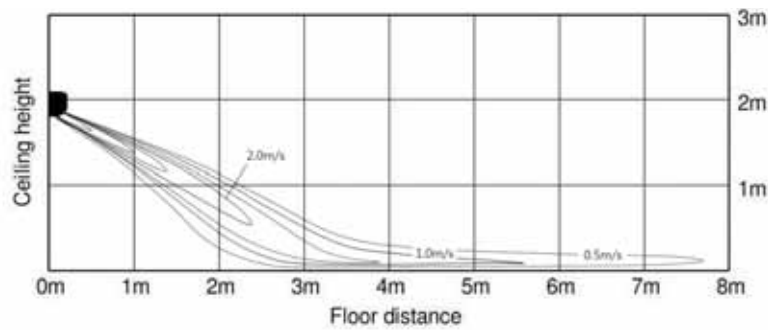


2) Cooling temperature distribution

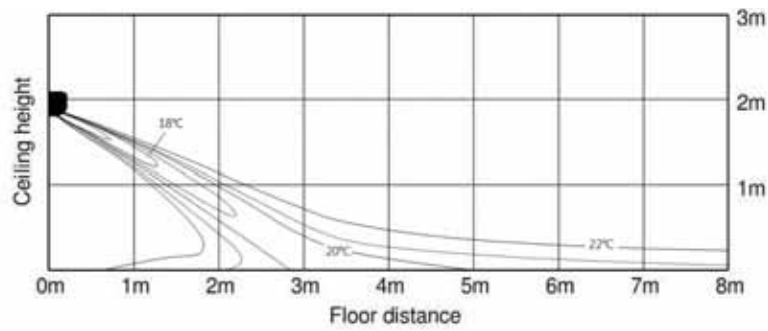

3) Heating air velocity distribution

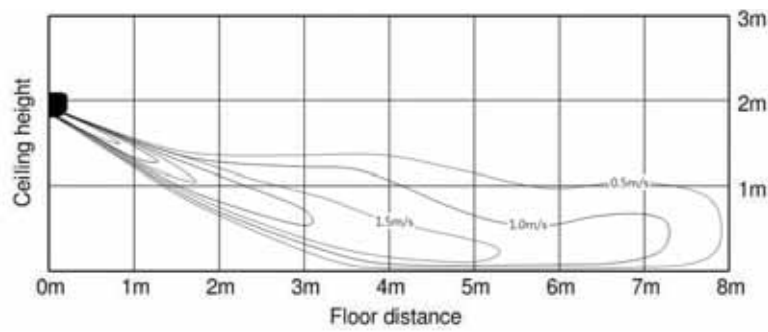


4) Heating temperature distribution

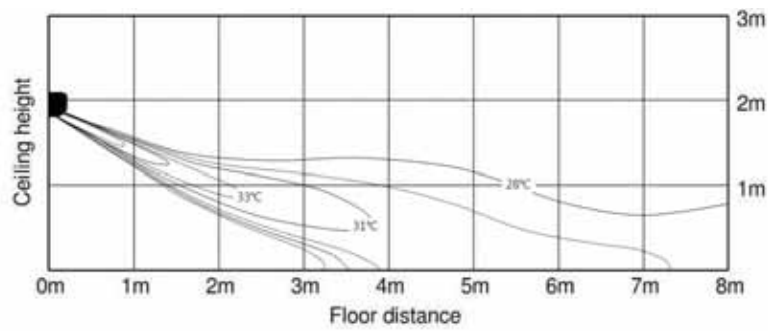

9. Piping Diagram

BORACAY

EEV included Model

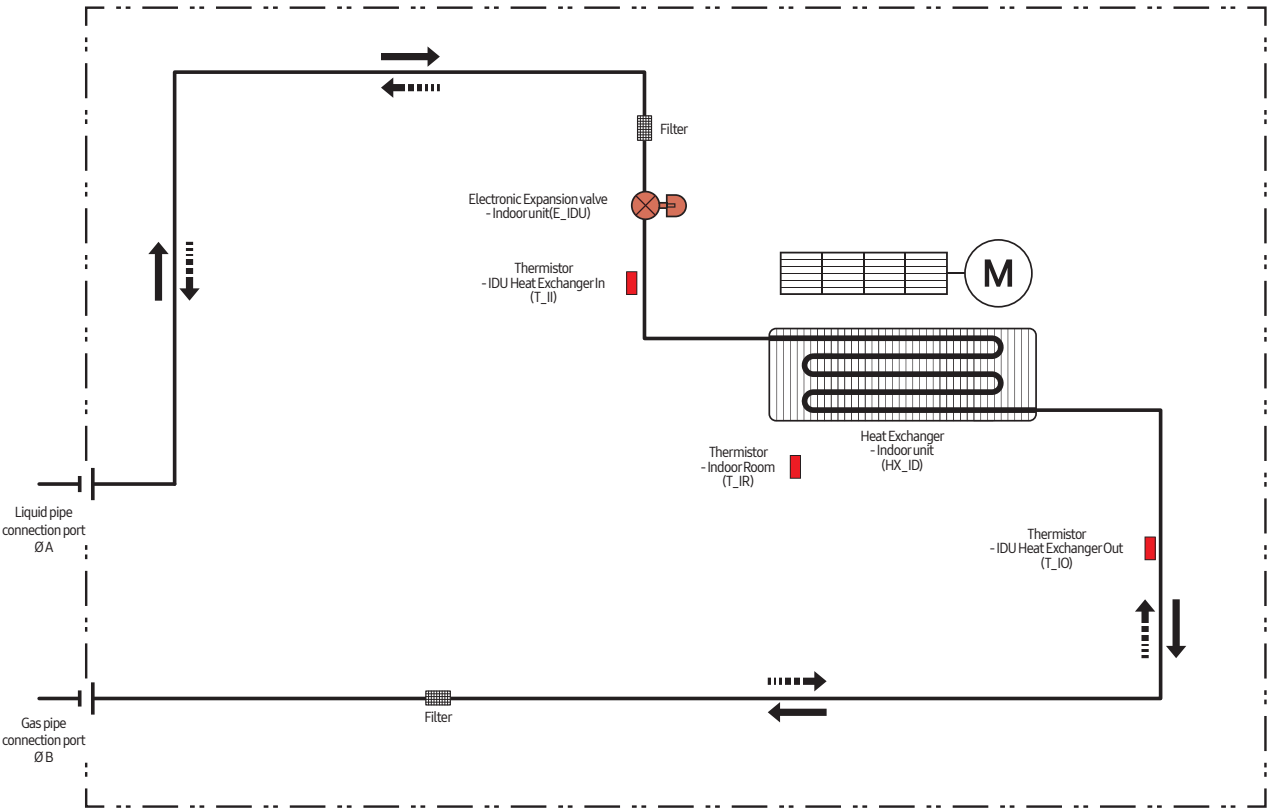


Refrigerant flow	
Cooling	Heating

MODEL	A	B
AM015KNQD*****	6.35	12.7
AM022KNQD*****		
AM028KNQD*****		
AM036KNQD*****		
AM045KNQD*****		
AM056KNQD*****	9.52	15.88
AM071KNQD*****		

9. Piping Diagram

BORACAY

EEV not included Model

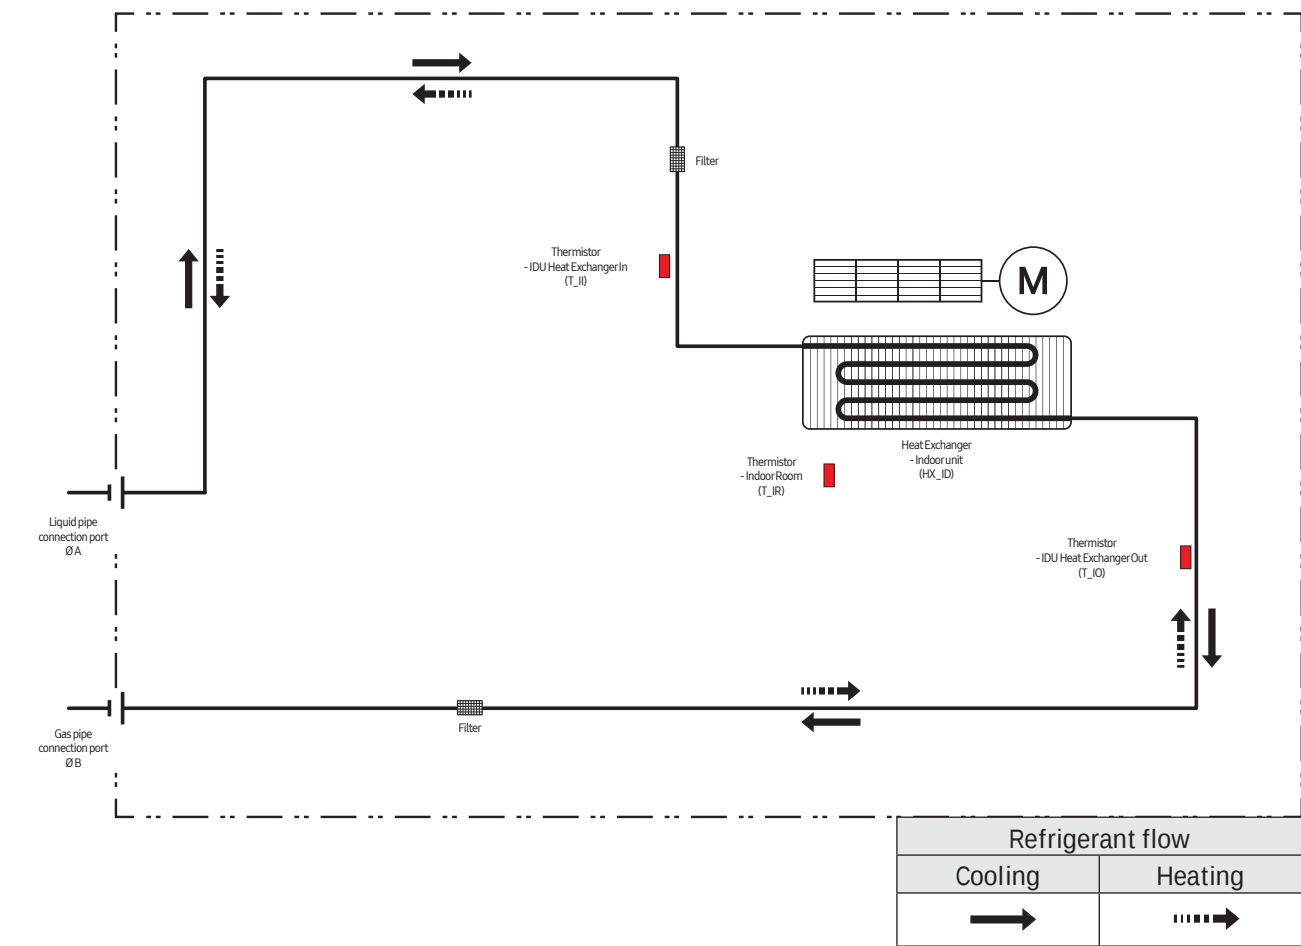

MODEL	A	B
AM015KNTD*****	6.35	12.7
AM022KNTD*****		
AM028KNTD*****		
AM036KNTD*****		
AM045KNTD*****		
AM056KNTD*****	9.52	15.88
AM071KNTD*****		